



ENTRÉE LLC

REFRIGERATION EQUIPMENT

NORTH AMERICA



Table of Contents

Cube Ice Machines

Cube Ice Machines.....	3
------------------------	---

Reach-In Refrigeration

Reach-In Solid Door Refrigerator	5
Reach-In Half Door Refrigerator	6
Reach-In Solid Door Freezer	7
Reach-In Half Door Freezer	8
Reach-In Glass Door Refrigerator	9
Reach-In Glass Door Freezer	10
Reach-In Solid Door Refrigerator	11
Reach-In Solid Door Freezer.....	12

Top Mount Refrigeration

Top Mount Solid Door Refrigerator	13
Top Mount Solid Door Freezer	14

Preparation Tables

Salad/Sandwich Prep Tables.....	15
Mega Top Sandwich/Salad Prep Table	17

Undercounter & Worktop

Undercounter Refrigerator	19
Undercounter Freezer	20
Worktop Refrigerator	21
Worktop Freezer	22
Pizza Prep Table	23

Merchandise & Display

Countertop Merchandiser Refrigerator	24
Glass Door Merchandiser Refrigerator	25
Glass Door Merchandiser Freezer	27

Reach-In Refrigeration

Back Bar Cooler – 24” Depth Glass Door	29
Back Bar Cooler – 27” Depth Glass Door	33
Direct Draw Beer Dispenser – 24” Depth	37
Direct Draw Beer Dispenser – 27” Depth	39
Chef Base Refrigerators	41
Horizontal Bottle Coolers	43
Glass Frosters	44
Refrigerated Deli Cases	45
Cake Display Cases – Two Layer Shelves	46
Cake Display Cases – Three Layer Shelves	47
Ice Cream Dipping Cabinets	48
Cold Wall Milk Cooler	49

CUBE ICE MACHINES

**Reliable Performance.
Consistent Output.**

Designed for high-volume environments with consistent ice quality and reliable output.



KEY FEATURES

- ✓ Half-size cube ice production
- ✓ Durable stainless steel exterior
- ✓ Air-cooled condenser system
- ✓ Bright LED illuminated bin
- ✓ Removable air filter for easy maintenance
- ✓ Digital controller for quick diagnostics
- ✓ Closed waterway system for improved sanitation
- ✓ Adjustable legs for flexible installation



R290 REFRIGERANT

Eco-friendly, efficient, and reliable cooling

CONFORMS TO NSF/ANSI STD. 7



Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz



Undercounter Ice Machines

MODEL	Ice Capacity	Ice Production/day (at wt:21/10°C)	Cooling Exterior Dimension (W×D×H / inch)	Voltage
ECIM160X-5	160 lbs / 24hrs	157 lbs (71 kg)	26.1 × 27.6 × 38.2	115V/60Hz
ECIM210X-5	210 lbs / 24hrs	207 lbs (94 kg)	26.1 × 27.6 × 38.2	115V/60Hz
ECIM280X-5	280 lbs / 24hrs	280 lbs (127 kg)	26.1 × 27.6 × 38.2	115V/60Hz
ECIM160X	160 lbs / 24hrs	157 lbs (71 kg)	26.1 × 27.6 × 38.2	115V/60Hz
ECIM210X	210 lbs / 24hrs	207 lbs (94 kg)	26.1 × 27.6 × 38.2	115V/60Hz
ECIM280X	280 lbs / 24hrs	280 lbs (127 kg)	26.1 × 27.6 × 38.2	115V/60Hz

Modular Ice Machines 23.4 × 24.5 × 22.3"

Model	Ice Capacity	Ice Production / Day (at 21°C)	Ice Storage	Water Inlet Size	Cooling Exterior Dimension (W×D×H / Inch)	Bin Dimension (W×D×H / Inch)	Voltage
ECIM350X-5	350 lbs / 24 hrs	351 lbs (159 kg)	275 lbs (125 kg)	3/4" Inches	23.4 × 24.5 × 22.3"	22.8 × 32.6 × 44.7"	115V / 60Hz
ECIM420X-5	420 lbs / 24 hrs	410 lbs (186 kg)	275 lbs (125 kg)	3/4" Inches	23.4 × 24.5 × 22.3"	22.8 × 32.6 × 44.7"	115V / 60Hz
ECIM350X	350 lbs / 24 hrs	351 lbs (159 kg)	275 lbs (125 kg)	3/4" Inches	23.4 × 24.5 × 22.3"	22.8 × 32.6 × 44.7"	115V / 60Hz
ECIM420X	420 lbs / 24 hrs	410 lbs (186 kg)	275 lbs (125 kg)	3/4" Inches	23.4 × 24.5 × 22.3"	22.8 × 32.6 × 44.7"	115V / 60Hz

Modular Ice Machines 31.3 × 24.5 × 22.3"

Model	Ice Capacity	Ice Production / Day (at 21°C)	Ice Storage	Water Inlet Size	Cooling Exterior Dimension (W×D×H / Inch)	Bin Dimension (W×D×H / Inch)	Voltage
ECIM530X-5	530 lbs / 24hrs	529 lbs (240 kg)	375 lbs (170 kg)	3/4 Inches	31.3 × 24.5 × 22.3"	30.7 × 32.6 × 44.7"	115V / 60Hz
ECIM530X	530 lbs / 24hrs	529 lbs (240 kg)	375 lbs (170 kg)	3/4 Inches	31.3 × 24.5 × 22.3"	30.7 × 32.6 × 44.7"	115V / 60Hz



Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Solid Door Refrigerator



Features:

- **Stainless steel exterior, aluminum interior and back.** Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors** with 90 degree stay-open feature. Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.
- **Incandescent interior lighting - safety shielded.**



ERB1X



ERB2X



ERB3X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ERB1X	1	3	29 x 32 1/4 x 82 1/2	736 x 818 x 2095	23 650	1/5	3.6	115/60/1	NEMA 5-15P
ERB2X	2	6	54 x 32 1/4 x 82 1/2	1371 x 818 x 2095	47 1321	1/4	4.6	115/60/1	NEMA 5-15P
ERB3X	3	9	80 7/8 x 32 1/4 x 82 1/2	2054 x 818 x 2095	72 2040	3/4	8.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Half Door Refrigerator



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).**
- **Self-Closing doors with 90 degree stay-open feature.**
Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant, which is eco-friendly and more efficient.**
- **Incandescent interior lighting - safety shielded.**



ERB1X-2H



ERB2X-4H



ERB3X-6H

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ERB1X-2H	1	3	29 x 32 1/4 x 82 1/2	736 x 818 x 2095	23 650	1/5	3.6	115/60/1	NEMA 5-15P
ERB2X-4H	2	6	54 x 32 1/4 x 82 1/2	1371 x 818 x 2095	47 1321	1/4	4.6	115/60/1	NEMA 5-15P
ERB3X-6H	3	9	80 7/8 x 32 1/4 x 82 1/2	2054 x 818 x 2095	72 2040	3/4	8.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Reach-In Solid Door Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.** Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors** with 90 degree stay-open feature. Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Incandescent interior lighting - safety shielded.**



EFB1X



EFB2X



EFB3X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EFB1X	1	3	29 x 32 1/4 x 82 1/2		23	1/2	4.9	115/60/1	NEMA 5-15P
			736 x 818 x 2095		650				
EFB2X	2	6	54 x 32 1/4 x 82 1/2		47	1	7.6	115/60/1	NEMA 5-15P
			1371 x 818 x 2095		1321				
EFB3X	3	9	80 7/8 x 32 1/4 x 82 1/2		72	1 1/4	14.4	115/60/1	NEMA 5-20P
			2054 x 818 x 2095		2040				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Half Door Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors** with 90 degree stay-open feature. Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Incandescent interior lighting - safety shielded.**



EFB1X-2H




EFB2X-4H



EFB3X-6H

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EFB1X-2H	1	3	29 x 32 1/4 x 82 1/2	736 x 818 x 2095	23 650	1/2	4.9	115/60/1	NEMA 5-15P
EFB2X-4H	2	6	54 x 32 1/4 x 82 1/2	1371 x 818 x 2095	47 1321	1	7.6	115/60/1	NEMA 5-15P
EFB3X-6H	3	9	80 7/8 x 32 1/4 x 82 1/2	2054 x 818 x 2095	72 2040	1 1/4	14.4	115/60/1	NEMA 5-20P

As continued product improvement is a policy of Entree, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entree LLC
Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Glass Door Refrigerator



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing glass doors with locks and keys.**
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.
- **Interior efficient LED lighting**



ERB1X-G



ERB2X-G



ERB3X-G

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ERB1X-G	1	3	29 x 32 1/4 x 82 1/2	736 x 818 x 2095	23	1/5	3.6	115/60/1	NEMA 5-15P
					650				
ERB2X-G	2	6	54 x 32 1/4 x 82 1/2	1371 x 818 x 2095	47	1/4	4.6	115/60/1	NEMA 5-15P
					1321				
ERB3X-G	3	9	80 7/8 x 32 1/4 x 82 1/2	2054 x 818 x 2095	72	3/4	8.5	115/60/1	NEMA 5-15P
					2040				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Glass Door Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing glass doors with locks and keys.**
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.
- **Interior efficient LED lighting**



EFB1X-G



EFB2X-G

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EFB1X-G	1	3	29 x 32 1/4 x 82 1/2	736 x 818 x 2095	23 650	1/2	7.6	115/60/1	NEMA 5-15P
EFB2X-G	2	6	54 x 32 1/4 x 82 1/2	1371 x 818 x 2095	47 1321	1	10.9	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Solid Door Refrigerator



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors** with 90 degree stay-open feature.
Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes**(except ERB12X).
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Incandescent interior lighting - safety shielded.**
(LED lighting on ERB12X)



ERB12X




ERB19X



ERB35X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ERB12X	1	3	24 7/8 x 23 1/2 x 64 5/8	630 x 595 x 1643	11 312	1/6	3.1	115/60/1	NEMA 5-15P
ERB19X	1	3	29 x 25 3/8 x 82 1/2	736 x 645 x 2095	19 538	1/5	3.1	115/60/1	NEMA 5-15P
ERB35X	2	6	39 1/2 x 29 1/2 x 82 1/2	1004 x 750 x 2095	35 991	1/4	4.3	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Reach-In Solid Door Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.** Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors** with 90 degree stay-open feature. Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes**(except EFB12X).
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Incandescent interior lighting - safety shielded.** (LED lighting on ERB12X)



EFB12X



EFB19X



EFB35X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EFB12X	1	3	24 7/8 x 23 1/2 x 64 5/8	630 x 595 x 1643	11 312	1/4	4.7	115/60/1	NEMA 5-15P
EFB19X	1	3	29 x 25 3/8 x 82 1/2	736 x 645 x 2095	19 538	1/2	3.8	115/60/1	NEMA 5-15P
EFB35X	2	6	39 1/2 x 29 1/2 x 82 1/2	1004 x 750 x 2095	35 991	1	7.8	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Top Mount Solid Door Refrigerator



Features:

- **Stainless steel exterior & interior and galvanized back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures** between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors with 90 degree stay-open feature.**
Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.
- **Interior efficient LED lighting**



ERT1X



ERT2X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm	cu.ft.	liters				
ERT1X	1	3	29 x 33 3/4 x 82 1/8	736 x 854 x 2086	23	650	1/3	3.5	115/60/1	NEMA 5-15P
ERT2X	2	6	54 x 33 3/4 x 82 1/8	1371 x 854 x 2086	47	1321	1/2	6.1	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC


Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Top Mount Solid Door Freezer



Features:

- **Stainless steel exterior & interior and galvanized back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures** between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors with 90 degree stay-open feature.**
Locks and keys included.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.
- **Interior efficient LED lighting**

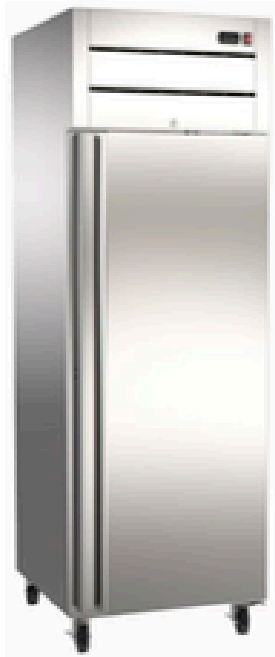

EFT1X



EFT2X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EFT1X	1	3	29 x 33 3/4 x 82 1/8	736 x 854 x 2086	23 650	2/3	6.1	115/60/1	NEMA 5-15P
EFT2X	2	6	54 x 33 3/4 x 82 1/8	1371 x 854 x 2086	47 1321	3/4	8.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Salad/Sandwich Prep Tables



Features:

- **Stainless steel exterior, aluminum interior and back.** Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).**
- **Self-Closing doors with 90 degree stay-open feature.**
- **Shelves: Adjustable heavy-duty PVC coated shelves.**
- **Comes standard with NSF approved food pans and cutting board.**
- **Electronic control system makes it easy to adjust temperature set point and defrost frequency.**
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant, which is eco-friendly and more efficient.**



EST27X



EST36X



EST46X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EST27X	1	1	27 1/2 x 29 1/2 x 42 1/4	698 x 750 x 1075	5.7 160	1/5	3.6	115/60/1	NEMA 5-15P
EST36X	2	2	36 1/4 x 29 1/2 x 42 1/4	920 x 750 x 1075	7.6 213	1/5	4.3	115/60/1	NEMA 5-15P
EST46X	2	2	46 7/8 x 29 1/2 x 42 1/4	1188 x 750 x 1075	9.5 268	1/4	4.9	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors** with 90 degree stay-open feature.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Comes standard with NSF approved food pans and cutting board.**
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.



EST60X



EST70X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EST60X	2	2	60 1/5 x 29 1/2 x 42 1/4		15	1/4	5.4	115/60/1	NEMA 5-15P
				1529 x 750 x 1075	428				
EST70X	3	3	70 2/5 x 29 1/2 x 42 1/4		15.5	3/4	7.8	115/60/1	NEMA 5-15P
				1787 x 750 x 1075	440				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Mega Top Sandwich/Salad Prep Table



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures** between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors with 90 degree stay-open feature.**
- **Shelves: Adjustable heavy-duty PVC coated shelves.**
- **Comes standard with NSF approved food pans and cutting board.**
- **Electronic control system makes it easy to adjust** temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant, which is eco-friendly and more efficient.**



EMST27X




EMST36X



EMST46X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EMST27X	1	1	27 1/2 x 34 x 45 7/8	698 x 864 x 1166	5.7 160	1/5	3.6	115/60/1	NEMA 5-15P
EMST36X	2	2	36 1/4 x 34 x 45 7/8	920 x 864 x 1166	7.6 213	1/5	4.3	115/60/1	NEMA 5-15P
EMST46X	2	2	46 7/8 x 34 x 45 7/8	1188 x 864 x 1166	9.5 268	1/4	4.9	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Mega Top Sandwich/Salad Prep Table



Features:

- Stainless steel exterior, aluminum interior and back. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Comes standard with NSF approved food pans and cutting board.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EMST60X



EMST70X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EMST60X	2	2	60 1/5 x 34 x 45 7/8		15	1/4	5.4	115/60/1	NEMA 5-15P
			1529 x 864 x 1166		428				
EMST70X	3	3	70 2/5 x 34 x 45 7/8		15.5	3/4	7.8	115/60/1	NEMA 5-15P
			1787 x 864 x 1166		440				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Undercounter Refrigerator



Features:

- Stainless steel exterior, aluminum interior and back. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EUR27X



EUR36X
EUR47X
EUR60X



EUR72X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EUR27X	1	1	27 x 29 1/2 x 35 1/4	685 x 750 x 895	6.3 177	1/6	2.2	115/60/1	NEMA 5-15P
EUR36X	2	2	36 1/4 x 29 1/2 x 35 1/4	920 x 750 x 895	10.8 306	1/6	2.3	115/60/1	NEMA 5-15P
EUR47X	2	2	47 1/4 x 29 1/2 x 35 1/4	1200 x 750 x 895	12 338	1/5	2.4	115/60/1	NEMA 5-15P
EUR60X	2	2	60 1/8 x 29 1/2 x 35 1/4	1529 x 750 x 895	15 428	1/5	2.6	115/60/1	NEMA 5-15P
EUR72X	3	3	72 x 29 1/2 x 35 1/4	1829 x 750 x 895	15.5 440	1/5	2.7	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Undercounter Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system** keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors** with 90 degree stay-open feature.
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil** for cleaning and service
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.



EUF27X



**EUF36X
EUF47X**



EUF60X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EUF27X	1	1	27 x 29 1/2 x 35 1/4	685 x 750 x 895	6.3 177	1/5	3.6	115/60/1	NEMA 5-15P
EUF36X	2	2	36 1/4 x 29 1/2 x 35 1/4	920 x 750 x 895	10.8 306	1/5	4.1	115/60/1	NEMA 5-15P
EUF47X	2	2	47 1/4 x 29 1/2 x 35 1/4	1200 x 750 x 895	12 338	1/4	4.5	115/60/1	NEMA 5-15P
EUF60X	2	2	60 1/8 x 29 1/2 x 35 1/4	1529 x 750 x 895	15 428	1/2	4.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Worktop Refrigerator



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures** between 33°F and 41°F (0.5°C to 5°C).
- **Self-Closing doors with 90 degree stay-open feature.**
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant,** which is eco-friendly and more efficient.



EWTR27X



EWTR36X
EWTR47X
EWTR60X



EWTR72X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EWTR27X	1	1	27 x 29 1/2 x 38 3/4	685 x 750 x 984	6.3 177	1/6	2.2	115/60/1	NEMA 5-15P
EWTR36X	2	2	36 1/4 x 29 1/2 x 38 3/4	920 x 750 x 984	10.8 306	1/6	2.3	115/60/1	NEMA 5-15P
EWTR47X	2	2	47 1/4 x 29 1/2 x 38 3/4	1200 x 750 x 984	12 338	1/5	2.4	115/60/1	NEMA 5-15P
EWTR60X	2	2	60 1/8 x 29 1/2 x 38 3/4	1529 x 750 x 984	15 428	1/5	2.6	115/60/1	NEMA 5-15P
EWTR72X	3	3	72 x 29 1/2 x 38 3/4	1829 x 750 x 984	15.5 440	1/5	2.7	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Worktop Freezer



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures**
between -8°F and 0°F (-22°C to -18°C).
- **Self-Closing doors with 90 degree stay-open feature.**
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant, which is eco-friendly and more efficient.**



EWTF27X



EWTF36X
EWTF47X



EWTF60X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EWTF27X	1	1	27 x 29 1/2 x 38 3/4	685 x 750 x 984	6.3 177	1/5	3.6	115/60/1	NEMA 5-15P
EWTF36X	2	2	36 1/4 x 29 1/2 x 38 3/4	920 x 750 x 984	10.8 306	1/5	4.1	115/60/1	NEMA 5-15P
EWTF47X	2	2	47 1/4 x 29 1/2 x 38 3/4	1200 x 750 x 984	12 338	1/4	4.5	115/60/1	NEMA 5-15P
EWTF60X	2	2	60 1/8 x 29 1/2 x 38 3/4	1529 x 750 x 984	15 428	1/2	4.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Pizza Prep Table



Features:

- **Stainless steel exterior, aluminum interior and back.**
Option of bright white aluminum interior available.
- **Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).**
- **Self-Closing doors with 90 degree stay-open feature.**
- **Shelves: Adjustable heavy-duty PVC coated shelves.**
- **Comes standard with NSF approved food pans and cutting board.**
- **Electronic control system makes it easy to adjust temperature set point and defrost frequency.**
- **Preinstalled 4" swivel casters with brakes.**
- **Easy to access condenser coil for cleaning and service**
- **Uses R290 refrigerant, which is eco-friendly and more efficient.**



EP44X
EP49X



EP67X
EP70X



EP92X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
EP44X	1	1	44 1/2 x 31 1/2 x 39 3/8 1131 x 800 x 998	7.6 216	1/6	4.5	115/60/1	NEMA 5-15P
EP49X	1	1	49 7/8 x 31 1/2 x 39 3/8 1266 x 800 x 998	13.8 391	1/6	4.5	115/60/1	NEMA 5-15P
EP67X	2	2	67 1/4 x 31 1/2 x 39 3/8 1709 x 800 x 998	15.4 439	1/5	6	115/60/1	NEMA 5-15P
EP70X	2	2	70 7/8 x 31 1/2 x 39 3/8 1800 x 800 x 998	16.9 477	1/5	5.5	115/60/1	NEMA 5-15P
EP92X	3	3	91 7/8 x 31 1/2 x 39 3/8 2334 x 800 x 998	24.2 684	1/4	7.2	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Countertop Merchandiser Refrigerator



Features:

- Exterior: Coated steel. Black or white or S/S finish available.
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F (0.5°C to 5°C).
- Swing glass door.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Interior efficient LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



ECM5X



ECM7X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			Inches	mm					
ECM5X	1	2	24 3/8 x 25 1/4 x 33 1/4	620 x 640 x 845	5 140	1/5	1.8	115/60/1	NEMA 5-15P
ECM7X	1	3	24 3/8 x 25 1/4 x 38 5/8	620 x 640 x 980	6.4 180	1/5	2	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Glass Door Merchandiser Refrigerator



Features:


- Exterior: Coated steel. Black or white finish available.
Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- 2" swivel casters are pre-installed on EGM21X and EGM26X.
- 3" swivel casters are pre-installed on EGM28X.
- Interior efficient LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Leveling feet are standard, and casters are available.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EGM21X



EGM26X

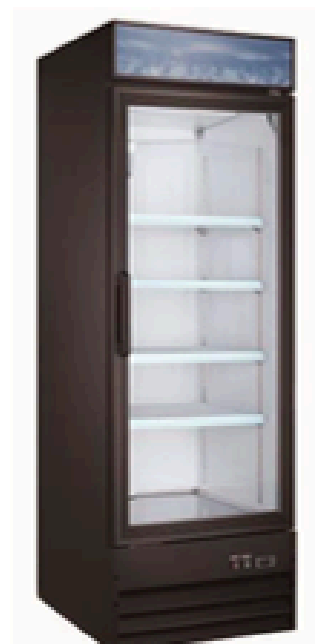

EGM28X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EGM21X	1	4	21 5/8 x 21 5/8 x 63	550 x 550 x 1600	9.1 258	1/5	2	115/60/1	NEMA 5-15P
EGM26X	1	4	25 3/5 x 22 4/5 x 79 3/8	650 x 580 x 2015	14 398	1/5	2.5	115/60/1	NEMA 5-15P
EGM28X	1	4	28 3/8 x 31 7/8 x 79 3/8	720 x 810 x 2015	23 648	1/5	3	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC


Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Glass Door Merchandiser Refrigerator



Features:

- Exterior: Coated steel. Black or white finish available.
Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- 3" swivel casters are pre-installed.
- Interior efficient LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Casters are standard and leveling feet are available.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.

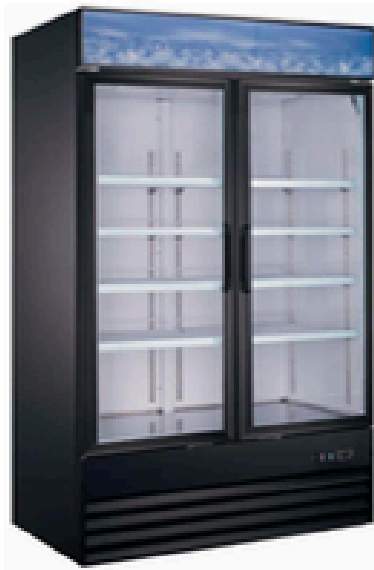

EGM48X



EGMSDR54X



EGMDR78X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			Inches	mm					
EGM48X	2	8	53 1/8 x 31 7/8 x 79 3/8	1350 x 810 x 2015	45 1270	1/4	6	115/60/1	NEMA 5-15P
EGMSDR54X	2	8	53 1/8 x 31 7/8 x 79 3/8	1350 x 810 x 2015	45 1270	1/4	6	115/60/1	NEMA 5-15P
EGMDR78X	3	12	78 3/8 x 30 x 80 3/4	1988 x 760 x 2050	53 1500	3/4	8.4	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Glass Door Merchandiser Freezer



Features:

- Exterior: Coated steel. Black or white finish available.
Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between -10°F and 0°F (-23°C to -18°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- 3" swivel casters are pre-installed.
- Interior efficient LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Casters are standard and leveling feet are available.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EGMF26X



EGMF27X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EGMF26X	1	3	26 3/4 x 26 x 55 7/8		8.5	1/4	4.2	115/60/1	NEMA 5-15P
			680 x 660 x 1420		240				
EGMF27X	1	4	27 1/4 x 26 1/4 x 80 3/8		13	3/4	5.3	115/60/1	NEMA 5-15P
			690 x 665 x 2040		368				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Glass Door Merchandiser Freezer



Features:

- Exterior: Coated steel. Black or white finish available.
Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between -10°F and 0°F (-23°C to -18°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- 3" swivel casters are pre-installed.
- Interior efficient LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Casters are standard and leveling feet are available.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EGMF31X



EGMF53X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm	cu.ft.	liters				
EGMF31X	1	4	31 1/8 x 31 1/4 x 80 3/4		23		3/4	7.6	115/60/1	NEMA 5-15P
				790 x 845 x 2050	648					
EGMF53X	2	8	53 1/8 x 31 7/8 x 79 3/8		45		1-1/4	10.6	115/60/1	NEMA 5-20P
				1350 x 810 x 2015	1270					

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 24" Depth Glass Door



Features:

- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Sliding Glass Doors are noted with the addition of "Y" in the model number.



EBB49-24GX
EBB48-24GYX



EBB60-24GX
EBB60-24GYX



EBB72-24GX
EBB72-24GYX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBB49-24GX EBB48-24GYX	2	4	48 7/8 x 24 3/8 x 35 5/8	1240 x 620 x 905	11.8 335	1/5	3.5	115/60/1	NEMA 5-15P
EBB60-24GX EBB60-24GYX	2	4	60 3/4 x 24 3/8 x 35 5/8	1544 x 620 x 905	15.8 446	1/5	3.5	115/60/1	NEMA 5-15P
EBB72-24GX EBB72-24GYX	3	6	72 3/4 x 24 3/8 x 35 5/8	1848 x 620 x 905	19.6 556	1/4	3.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 24" Depth Glass Door



Features:

- Durable stainless steel interior and exterior.
- Silver aluminium door frame
- Tempered glass
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB49-24GSX



EBB60-24GSX



EBB72-24GSX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			Inches	mm					
EBB49-24GSX	2	4	48 7/8 x 24 3/8 x 35 5/8	1240 x 620 x 905	11.8 335	1/5	3.5	115/60/1	NEMA 5-15P
EBB60-24GSX	2	4	60 3/4 x 24 3/8 x 35 5/8	1544 x 620 x 905	15.8 446	1/5	3.5	115/60/1	NEMA 5-15P
EBB72-24GSX	3	6	72 3/4 x 24 3/8 x 35 5/8	1848 x 620 x 905	19.6 556	1/4	3.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 24" Depth Solid Door



Features:

- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB49-24X



EBB60-24X



EBB72-24X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBB49-24X	2	4	48 7/8 x 24 3/8 x 35 5/8	1240 x 620 x 905	11.8 335	1/5	3.5	115/60/1	NEMA 5-15P
EBB60-24X	2	4	60 3/4 x 24 3/8 x 35 5/8	1544 x 620 x 905	15.8 446	1/5	3.5	115/60/1	NEMA 5-15P
EBB72-24X	3	6	72 3/4 x 24 3/8 x 35 5/8	1848 x 620 x 905	19.6 556	1/4	3.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 24" Depth Solid Door



Features:

- Durable stainless steel interior and exterior.
- High density insulation cabinet and doors.
- Self-Closing doors with 90 degree stay-open feature.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB49-24SX



EBB60-24SX



EBB72-24SX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm	cu.ft.	liters				
EBB49-24SX	2	4	48 7/8 x 24 3/8 x 35 5/8	1240 x 620 x 905	11.8	335	1/5	3.5	115/60/1	NEMA 5-15P
EBB60-24SX	2	4	60 3/4 x 24 3/8 x 35 5/8	1544 x 620 x 905	15.8	446	1/5	3.5	115/60/1	NEMA 5-15P
EBB72-24SX	3	6	72 3/4 x 24 3/8 x 35 5/8	1848 x 620 x 905	19.6	556	1/4	3.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 27" Depth Glass Door



Features:

- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB23-27GX



EBB58-27GX



EBB69-27GX



EBB90-27GX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBB23-27GX	1	2	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5 186	1/6	1.9	115/60/1	NEMA 5-15P
EBB58-27GX	2	4	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19 546	1/5	3.5	115/60/1	NEMA 5-15P
EBB69-27GX	2	4	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3 666	1/5	3.5	115/60/1	NEMA 5-15P
EBB90-27GX	3	6	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	32 916	1/4	4.1	115//60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 27" Depth Glass Door



Features:

- Durable stainless steel interior and exterior.
- Silver aluminium door frame
- Tempered glass
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB23-27GSX



EBB58-27GSX



EBB69-27GSX



EBB90-27GSX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBB23-27GSX	1	2	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5 186	1/6	1.9	115/60/1	NEMA 5-15P
EBB58-27GSX	2	4	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19 546	1/5	3.5	115/60/1	NEMA 5-15P
EBB69-27GSX	2	4	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3 666	1/5	3.5	115/60/1	NEMA 5-15P
EBB90-27GSX	3	6	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	32 916	1/4	4.1	115//60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 27" Depth Solid Door



Features:

- Durable stainless steel interior and exterior.
- High density insulation cabinet and doors.
- Self-Closing doors with 90 degree stay-open feature.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB23-27X



EBB58-27X



EBB69-27X



EBB90-27X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBB23-27X	1	2	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5 186	1/6	1.9	115/60/1	NEMA 5-15P
EBB58-27X	2	4	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19 546	1/5	3.5	115/60/1	NEMA 5-15P
EBB69-27X	2	4	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3 666	1/5	3.5	115/60/1	NEMA 5-15P
EBB90-27X	3	6	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	32 916	1/4	4.1	115//60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Back Bar Cooler - 27" Depth Solid Door



Features:

- Durable stainless steel interior and exterior.
- High density insulation cabinet and doors.
- Self-Closing doors with 90 degree stay-open feature.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBB23-27SX



EBB58-27SX



EBB69-27SX



EBB90-27SX

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm	cu.ft.	liters				
EBB23-27SX	1	2	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5	186	1/6	1.9	115/60/1	NEMA 5-15P
EBB58-27SX	2	4	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19	546	1/5	3.5	115/60/1	NEMA 5-15P
EBB69-27SX	2	4	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3	666	1/5	3.5	115/60/1	NEMA 5-15P
EBB90-27SX	3	6	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	32	916	1/4	4.1	115//60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Direct Draw Beer Dispenser - 24" Depth



Features:

- Stainless steel top and interior, exterior coated steel.
- Cabinet and solid doors are foamed-in-place using a high density, polyurethane insulation.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Standard with towers and reinforced floor.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBD49-24X



EBD61-24X



EBD73-24X

MODEL	DOORS	1/2 Barrels	DIMENSIONS - WxDxH inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
EBD49-24X	2	2	48 7/8 x 24 3/8 x 35 5/8 1240 x 620 x 905	11.8 335	1/5	3.5	115/60/1	NEMA 5-15P
EBD61-24X	2	2	60 3/4 x 24 3/8 x 35 5/8 1544 x 620 x 905	15.8 446	1/5	3.5	115/60/1	NEMA 5-15P
EBD73-24X	3	3	72 3/4 x 24 3/8 x 35 5/8 1848 x 620 x 905	19.6 556	1/4	3.5	115/60/1	NEMA 5-15P

* Height does not include 15.8"(402mm) for draft arm.

- As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Direct Draw Beer Dispenser - 24" Depth



Features:

- Durable stainless steel top, interior and exterior.
- Cabinet and solid doors are foamed-in-place using a high density, polyurethane insulation.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Standard with towers and reinforced floor.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBD49-24SX



EBD61-24SX



EBD73-24SX

MODEL	DOORS	1/2 Barrels	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBD49-24SX	2	2	48 7/8 x 24 3/8 x 35 5/8	1240 x 620 x 905	11.8 335	1/5	3.5	115/60/1	NEMA 5-15P
EBD61-24SX	2	2	60 3/4 x 24 3/8 x 35 5/8	1544 x 620 x 905	15.8 446	1/5	3.5	115/60/1	NEMA 5-15P
EBD73-24SX	3	3	72 3/4 x 24 3/8 x 35 5/8	1848 x 620 x 905	19.6 556	1/4	3.5	115/60/1	NEMA 5-15P

* Height does not include 15.8"(402mm) for draft arm.

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Direct Draw Beer Dispenser - 27" Depth



Features:

- Stainless steel top and interior, exterior coated steel.
- Cabinet and solid doors are foamed-in-place using a high density, polyurethane insulation.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Standard with towers and reinforced floor.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBD23-27X



EBD59-27X



EBD69-27X



EBD90-27X

MODEL	DOORS	1/2 Barrels	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBD23-27X	1	1	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5 186	1/6	1.9	115/60/1	NEMA 5-15P
EBD59-27X	2	2	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19 546	1/5	3.5	115/60/1	NEMA 5-15P
EBD69-27X	2	3	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3 666	1/5	3.5	115/60/1	NEMA 5-15P
EBD90-27X	3	4	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	32 916	1/4	4.1	115//60/1	NEMA 5-15P

* Height does not include 15.8"(402mm) for draft arm.

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Direct Draw Beer Dispenser - 27" Depth



Features:

- Durable stainless steel top, interior and exterior.
- Cabinet and solid doors are foamed-in-place using a high density, polyurethane insulation.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Swivel casters are included.
- Standard with towers and reinforced floor.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Self-Closing doors with locks.
- Interior efficient LED lighting.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.



EBD23-27SX



EBD59-27SX



EBD69-27SX



EBD90-27SX

MODEL	DOORS	1/2 Barrels	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EBD23-27SX	1	1	23 1/2 x 30 3/8 x 38 3/4	596 x 772 x 983	6.5 186	1/6	1.9	115/60/1	NEMA 5-15P
EBD59-27SX	2	2	58 7/8 x 27 3/4 x 35 5/8	1495 x 705 x 905	19 546	1/5	3.5	115/60/1	NEMA 5-15P
EBD69-27SX	2	3	69 1/8 x 27 3/4 x 35 5/8	1755 x 705 x 905	23.3 666	1/5	3.5	115/60/1	NEMA 5-15P
EBD90-27SX	3	4	90 3/8 x 27 3/4 x 35 5/8	2295 x 705 x 905	916 4*1/2	1/4	4.1	115//60/1	NEMA 5-15P

* Height does not include 15.8"(402mm) for draft arm.

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Chef Base Refrigerators



Features:

- Stainless steel interior and exterior retains attractive finish longer. Matching aluminum finished back.
- Stainless steel top equipped with a marine edge enables the unit's top to contain drips and spills for easy cleanup.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Heavy-duty swivel casters are pre-installed.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Drawers with Heavy-duty sliders.
- Drawers 1 year parts and labor warranty.



ECB36X



ECB48X



ECB52X



ECB52-60TX

MODEL	DRAWERS	GN PANS	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ECB36X	2	2*1/1+6*1/6	36 3/8 x 32 1/8 x 25 3/4	924 x 816 x 655	5.9 167	1/6	4	115/60/1	NEMA 5-15P
ECB48X	2	4*1/1 + 6*1/6	48 3/8 x 32 1/8 x 25 3/4	1228 x 816 x 655	9.6 270	1/6	4.3	115/60/1	NEMA 5-15P
ECB52X	2	6*1/1	51 7/8 x 32 1/8 x 25 3/4	1318 x 816 x 655	9.9 280	1/6	4.5	115/60/1	NEMA 5-15P
ECB52-60TX	2	6*1/1	60 x 32 1/8 x 25 3/4	1524 x 816 x 655	9.9 280	1/6	4.5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Chef Base Refrigerators



Features:

- Stainless steel interior and exterior retains attractive finish longer. Matching aluminum finished back.
- Stainless steel top equipped with a marine edge enables the unit's top to contain drips and spills for easy cleanup.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Heavy-duty swivel casters are pre-installed.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Drawers with Heavy-duty sliders.
- Drawers 1 year parts and labor warranty.



ECB60X



ECB72X



ECB84X

MODEL	DRAWERS	GN PANS	DIMENSIONS - WxDxH		CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ECB60X	2	6*1/1 + 6*1/6	60 x 32 1/8 x 25 3/4	1524*816*655	12.7 360	1/6	5	115/60/1	NEMA 5-15P
ECB72X	4	8*1/1	72 3/8 x 32 1/8 x 25 3/4	1839*816*655	15 425	1/5	6.5	115/60/1	NEMA 5-15P
ECB84X	4	10*1/1	84 x 32 1/8 x 25 3/4	2134*816*655	19 538	1/5	6.8	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Horizontal Bottle Coolers



Features:

- Durable stainless steel top, coated aluminum interior.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 38°F (0.5°C to 3.3°C).
- Removable bottle cap opener and cap catcher included.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service.
- Adjustable coated-steel dividers included.
- Option of stainless steel exterior available.
- 3" swivel casters are pre-installed.



EBC25X
EBC36X



EBC50X
EBC65X



EBC80X
EBC95X

MODEL	LIDS	DIMENSIONS - WxDxH	CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
		inches mm	12 oz. Blts cases	12 oz. Cans cases				
EBC25X	1	26 3/8 x 28 1/8 x 34 1/4 670 x 713 x 869	4.5	6	1/6	2.4	115/60/1	NEMA 5-15P
EBC36X	1	36 x 28 1/8 x 34 1/4 915 x 713 x 869	11	14.5	1/6	2.4	115/60/1	NEMA 5-15P
EBC50X	2	49 1/2 x 28 1/8 x 34 1/4 1257 x 713 x 869	16.5	24	1/6	2.5	115/60/1	NEMA 5-15P
EBC65X	2	64 1/2 x 28 1/8 x 34 1/4 1638 x 713 x 869	22	32	1/6	2.5	115/60/1	NEMA 5-15P
EBC80X	3	79 1/2 x 28 1/8 x 34 1/4 2020 x 713 x 869	30	42	1/4	3.3	115/60/1	NEMA 5-15P
EBC95X	3	95 1/4 x 28 1/8 x 34 1/4 2418 x 713 x 869	37.5	55	1/4	3.3	115//60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Glass Frosters



Features:

- Durable stainless steel top, coated aluminum interior.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the glasses at safe temperatures between 0°F (-17.7°C).
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service.
- Adjustable coated-steel dividers included.
- Option of stainless steel exterior available.
- 3" swivel casters are pre-installed.



EGF27X
EGF36X



EGF49X

MODEL	LIDS	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
		inches	mm	8" (204mm) mugs	10 oz. steins				
EGF27X	1	26 3/8 x 26 5/8 x 34 1/4	670 x 677 x 869	90	85	1/5	3.3	115/60/1	NEMA 5-15P
EGF36X	1	36 x 26 5/8 x 34 1/4	915 x 677 x 869	180	172	1/4	3.3	115/60/1	NEMA 5-15P
EGF49X	2	49 1/2 x 26 5/8 x 34 1/4	1257 x 677 x 869	250	240	1/4	5.3	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entree, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Refrigerated Deli Cases



Features:

- Interior: Aluminum liner with stainless steel floor.
- Exterior: Black or white coated steel. Stainless steel available.
- Rounded corner design inside of the cabinet makes it easy to clean the inside storage room.
- Refrigeration system keeps the meats and deli products at safe temperatures between 32°F and 43°F (0°C to 6°C).
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Attractive curved glass and sliding glass doors.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service.
- Preinstalled 3" swivel casters with brake
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Interior efficient LED lighting.



EDC36X
EDC47X



EDC64X
EDC79X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			Inches	mm					
EDC36X	2	4	36 x 32 1/2 x 42 7/8	920 x 825 x 1089	12 330	1/4	4.5	115/60/1	NEMA 5-15P
EDC47X	2	6	48 x 32 1/2 x 42 7/8	1200 x 825 x 1089	18 508	1/4	4.5	115/60/1	NEMA 5-15P
EDC64X	3	9	64 x 32 1/2 x 42 7/8	1630 x 825 x 1089	22 620	1/2	4.8	115/60/1	NEMA 5-15P
EDC79X	3	9	82 x 32 1/2 x 42 7/8	2082 x 825 x 1089	32 903	3/4	5	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Cake Display Cases - Two Layer Shelves



Features:

- Refrigeration system maintains temperatures between 36°F and 43°F (2°C to 6°C).
- Exterior: Stainless steel floor and walls, standard. Sliding doors.
- Interior efficient LED lighting.
- Tempered glass to avoid injury by broken glass.
- Preinstalled 2" swivel casters.
- Shelves: Adjustable glass shelves provide extra large viewing area to maximize bakery product presentation.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Easy to access condenser coil for cleaning and service.
- NSF-7 compliant for open food product.
- Uses R290 refrigerant, which is eco-friendly and more efficient.



ECD35-2X



ECD47-2X



ECD59-2X



ECD71-2X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ECD35-2X	2	2	35 3/8 × 28 3/4 × 47 1/4	900 × 730 × 1200	11.3 320	1/4	4.8	115/60/1	NEMA 5-15P
ECD47-2X	2	2	47 1/4 × 28 3/4 × 47 1/4	1200 × 730 × 1200	14 400	1/4	5.6	115/60/1	NEMA 5-15P
ECD59-2X	2	2	59 1/8 × 28 3/4 × 47 1/4	1500 × 730 × 1200	17.7 500	1/2	10	115/60/1	NEMA 5-15P
ECD71-2X	2	2	70 7/8 × 28 3/4 × 47 1/4	1800 × 730 × 1200	21.2 600	3/4	11	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Cake Display Cases - Three Layer Shelves



Features:

- **Refrigeration system** maintains temperatures between 36°F and 43°F (2°C to 6°C).
- **Exterior:** Stainless steel floor and walls, standard. Sliding doors.
- **Interior efficient LED lighting.**
- **Tempered glass** to avoid injury by broken glass.
- **Preinstalled 2" swivel casters.**
- **Shelves:** Adjustable glass shelves provide extra large viewing area to maximize bakery product presentation.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Easy to access condenser coil** for cleaning and service.
- **NSF-7 compliant** for open food product.
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.



ECD35-3X



ECD47-3X



ECD59-3X



ECD71-3X

MODEL	DOORS	SHELVES	DIMENSIONS - WxDxH		CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
ECD35-3X	2	3	35 3/8 × 28 3/4 × 55 1/8	900 × 730 × 1400	12.7 360	1/4	4.8	115/60/1	NEMA 5-15P
ECD47-3X	2	3	47 1/4 × 28 3/4 × 55 1/8	1200 × 730 × 1400	19.4 550	1/2	9.7	115/60/1	NEMA 5-15P
ECD59-3X	2	3	59 1/8 × 28 3/4 × 55 1/8	1500 × 730 × 1400	25 700	1/2	10	115/60/1	NEMA 5-15P
ECD71-3X	2	3	70 7/8 × 28 3/4 × 55 1/8	1800 × 730 × 1400	30 850	3/4	11	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Ice Cream Dipping Cabinets



makes it easy to adjust

Features:

- **Stainless steel top** with glass viewing window.
Bright white painted steel interior and exterior.
- **Refrigeration system** keeps ice cream at temperatures between -10°F and -5°F (-23°C to -20°C).
- **Transparent lids** hinged with a full length handle.
- **Ice Cream Tub Holders and Tub Covers** Included with night covers.
- **Electronic control system** makes it easy to adjust temperature set point and defrost frequency.
- **Easy to access condenser coil** for cleaning and service.
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Deep Top Canopy Shelf**.
- **3" swivel casters** are pre-installed.
- **Interior efficient LED lighting**.



EDC18X



EDC26X
EDC35X

MODEL	LIDS	RACKS	DIMENSIONS - WxDxH		CAPACITY(3gal.)	HP	AMPS	VOLTAGE	PLUG TYPE
			inches	mm					
EDC18X	1	4	47 x 27 3/4 x 51 1/8		8	1/4	5.2	115/60/1	NEMA 5-15P
			1195 x 705 x 1300		4				
EDC26X	2	6	67 3/4 x 27 3/4 x 51 1/8		12	1/2	5.6	115/60/1	NEMA 5-15P
			1720 x 705 x 1300		8				
EDC35X	2	8	88 5/8 x 27 3/4 x 51 1/8		16	1	7.1	115/60/1	NEMA 5-15P
			2252 x 705 x 1300		12				

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



Intertek

Intertek

CONFORMS TO NSF/ANSI STD. 7

Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz

Cold Wall Milk Cooler



Features:

- **Cabinet finish:** White-coated steel exterior with stainless steel lid and door with lock and latch. Interior is NSF approved stainless steel liner and floor.
- Option of all stainless steel exterior available.
- **Heavy duty construction:** CFC and HCFC-free foamed-in-place polyurethane insulation.
- **Refrigeration system:** Single access, cold wall milk coolers maintain milk temperature of 33°F -38°F (0.5°C-3.3°C).
- **Electronic control system** makes it easy to adjust temperature set point.
- **Preinstalled 4" swivel casters with brakes.**
- **Bottom floor drain** is centrally located for easy cleaning, connecting to drain hose with hose adapter.
- **Easy to access condenser coil** for cleaning and service.
- **Uses R290 refrigerant**, which is eco-friendly and more efficient.
- **Stainless steel exterior are noted with the addition of "S" in the model number.**



EMC34X
EMC34-SX



EMC49X
EMC49-SX



EMC58X
EMC58-SX

MODEL	DOORS	DIMENSIONS - WxDxH		CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
		inches	mm	13"x13"x11" cases	19"x13"x11" cases				
EMC34X EMC34-SX	2	34 x 30 5/8 x 41 1/2	864 x 778 x 1052	8	4	1/5	2.3	115/60/1	NEMA 5-15P
EMC49X EMC49-SX	2	49 x 30 5/8 x 41 1/2	1245 x 778 x 1052	12	8	1/5	2.3	115/60/1	NEMA 5-15P
EMC58X EMC58-SX	2	58 x 30 5/8 x 41 1/2	1475 x 778 x 1052	16	10	1/5	2.4	115/60/1	NEMA 5-15P

As continued product improvement is a policy of Entrée, specifications are subject to change without notice.



Entrée LLC

Tel: 704 900 2068 E-mail: sales@entree.biz Website: www.entree.biz