

REFRIGERATORS AND FREEZERS

ERB12X



ERB19X



ERB35X

***Not suitable for installation in a non-commercial or residential applications.**


Model	Doors
ERB12X	1
ERB19X	1
ERB35X	2
EFB12X	1
EFB19X	1
EFB35X	2

STANDARD FEATURES

- Stainless steel exterior, aluminum interior and back. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C). And Freezer -8°F to 0°F.
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes. (except ERB12X & EFB12X -Leveling feet.)
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting - safety shielded. (LED lighting on ERB12X & EFB12X)
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS Liner	Approvals	ETL Listed
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Aluminum	Refrigerant	R290
Interior floor	Aluminum	Temperature range	(R) 33-41F; (F) 0° to -8°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted

CONFORMS TO NSF/ANSI STD 7

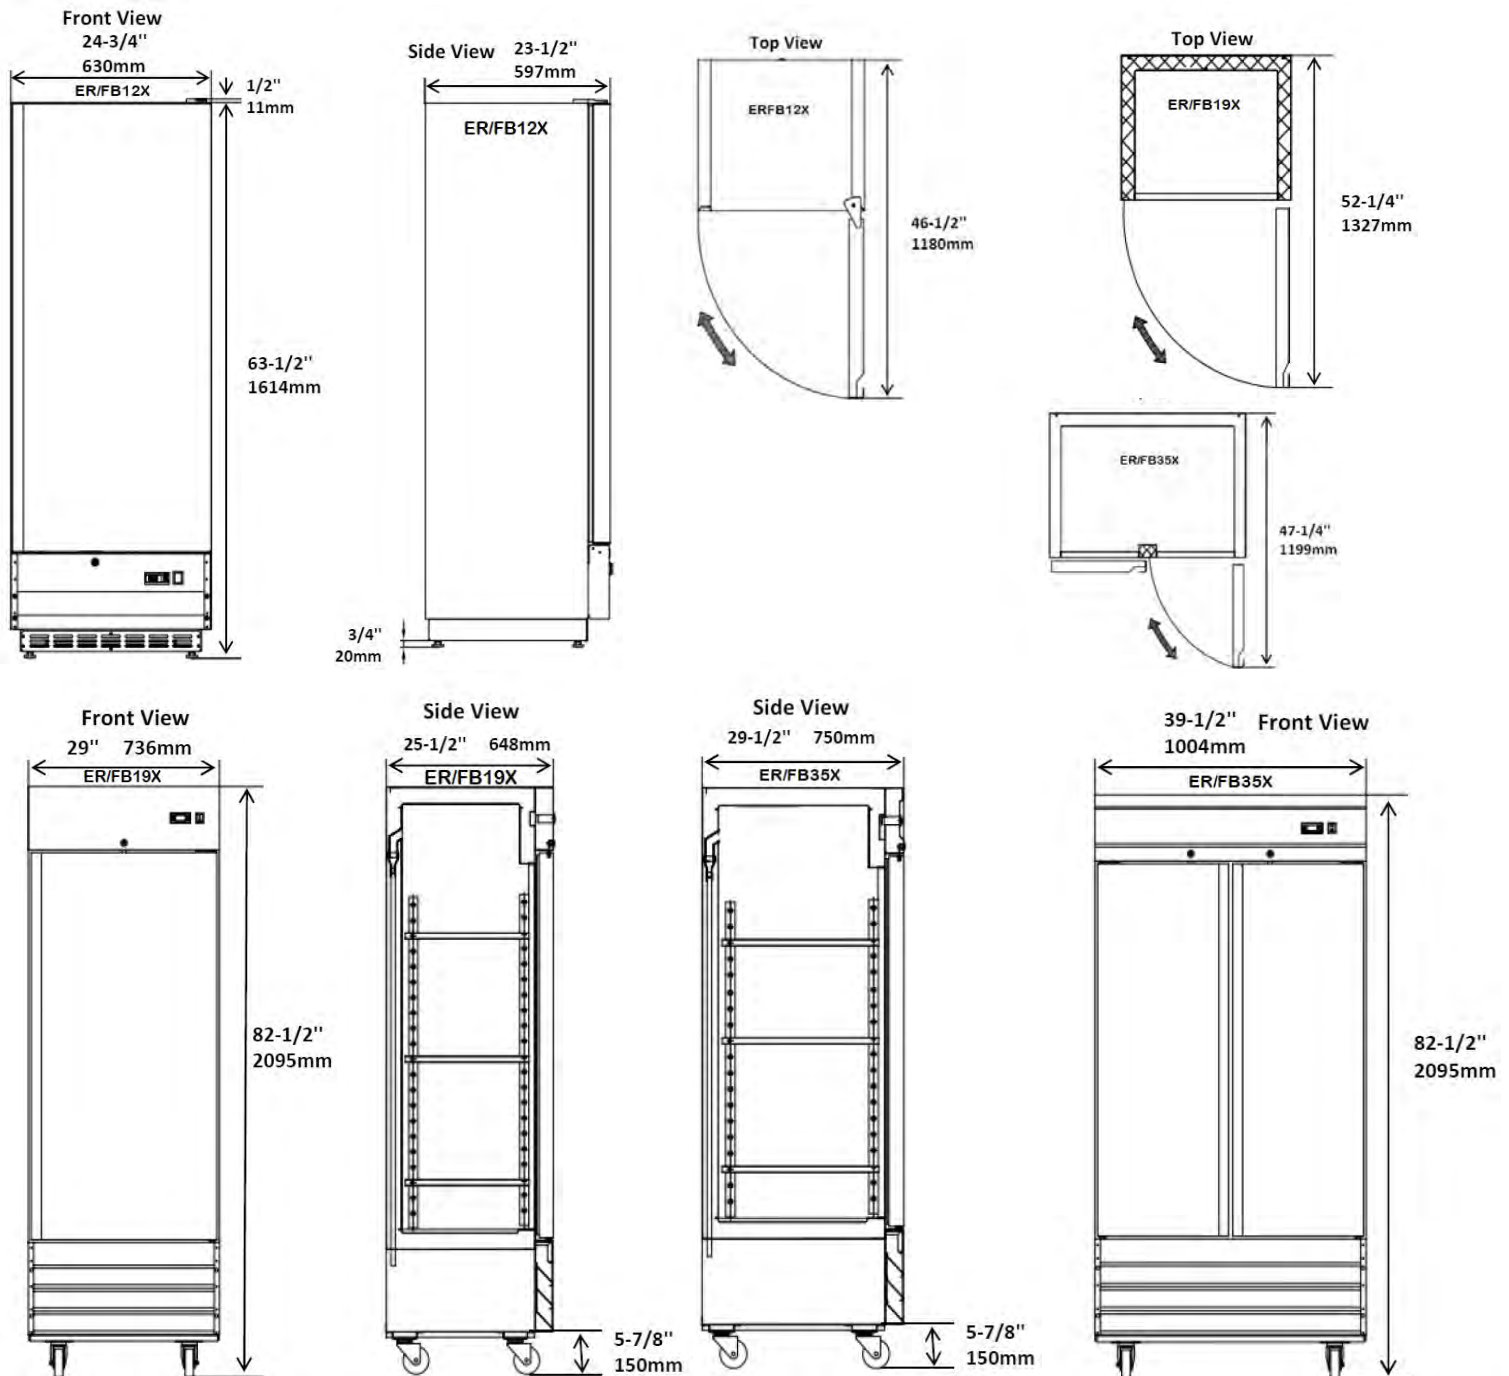

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
			L	D	H						
ERB12X	1	3	24.75	23.5	63.5	1/6	115/60/1	2.3	5-15P	10	180
EFB12X	1	3	24.75	23.5	63.5	1/4	115/60/1	4.0	5-15P	10	183
ERB19X	1	3	29.0	25.5	82.5	1/5	115/60/1	2.8	5-15P	10	297
EFB19X	1	3	29.0	25.5	82.5	1/2	115/60/1	5.9	5-15P	10	297
ERB35X	2	6	39.5	29.5	82.5	1/4	115/60/1	4.3	5-15P	10	308
EFB35X	2	6	39.5	29.5	82.5	1	115/60/1	7.8	5-15P	10	308