

## Mega Top Salad and Sandwich Units



Model	Size
EMST27X	29" Unit
EMST36X	36" Unit
EMST46X	46" Unit
EMST60X	60" Unit
EMST70X	70" Unit

### STANDARD FEATURES

- Stainless steel exterior, aluminum interior and back.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Comes standard with NSF approved food pans and cutting board.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed 4" swivel casters with brakes.
- Easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Warranty: Two year parts & labor warranty, and additional three years on compressor.



\*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, top & sides	<a href="#">Stainless steel</a>	Temperature control	<a href="#">Solid state thermostat/Digital display</a>
Doors	<a href="#">Stainless steel</a>	Approvals	<a href="#">ETL LISTED</a>
External back	<a href="#">Aluminum</a>	Refrigerating system	<a href="#">Capillary tube</a>
Cabinet interior	<a href="#">Aluminum</a>	Refrigerant	<a href="#">R290</a>
Interior floor	<a href="#">Stainless steel</a>	Temperature range	<a href="#">33°F to 41°F</a>
Insulation	<a href="#">Polyurethane (CFC free)</a>	Evaporator	<a href="#">Powder coated aluminum/copper</a>
Shelves	<a href="#">Heavy duty, PVC coating</a>	Condensing unit	<a href="#">Bottom mounted</a>


CONFORMS TO NSF/ANSI STD 7

Front view

EMST27X 27-1/2" 698mm

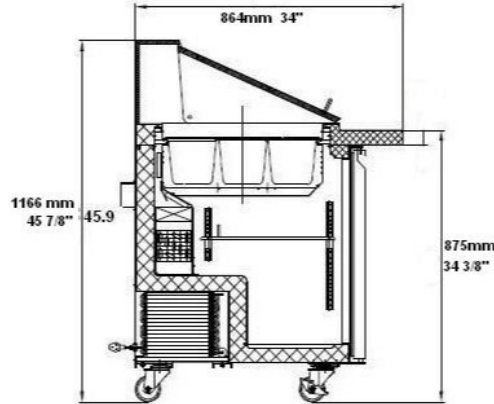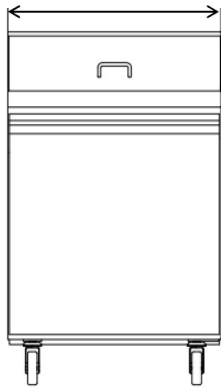



Section View

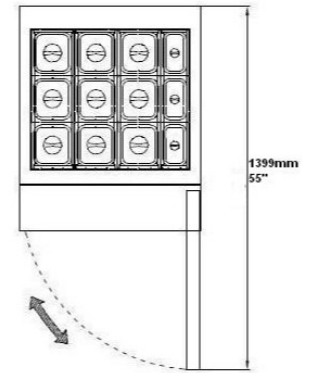


Plan

EMST36X

36-1/4" 920mm

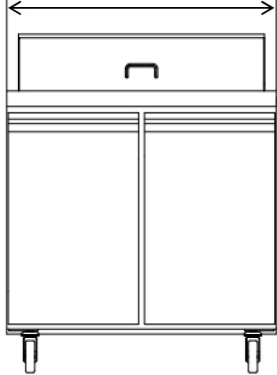


Plan

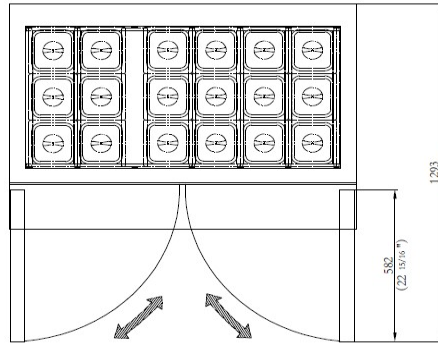

70-3/8" (1787mm)




EMST46X

46.875" 1188mm

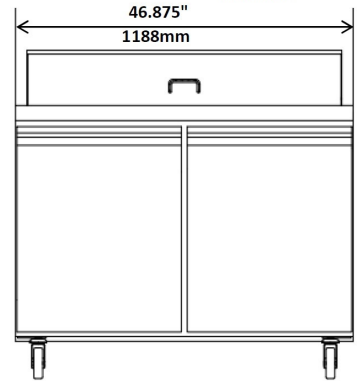

EMST60X

60-1/4" 1529mm

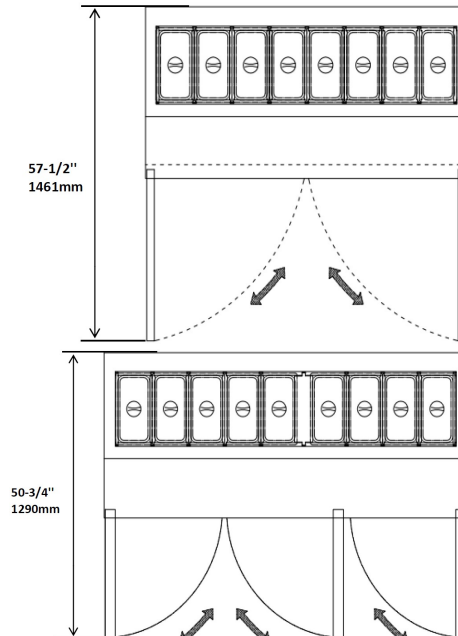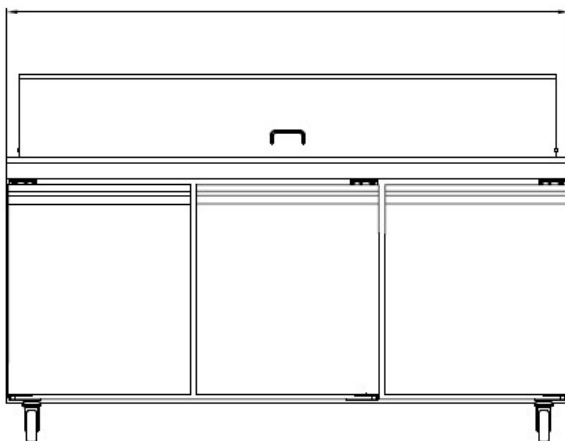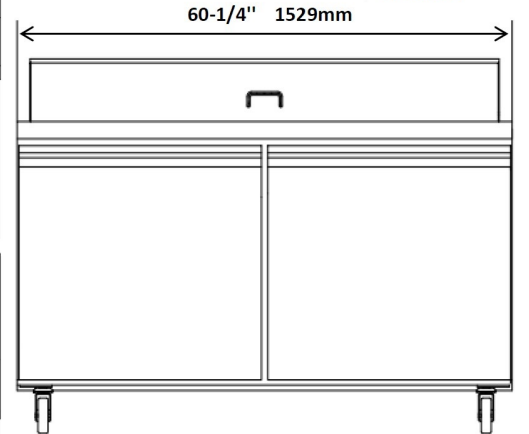

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Ship Weight
			L	D	H						
EMST27X	1	1	27.5	29.5	45.875	1/5	115/60/1	4.5	5-15P	10	264
EMST36X	2	2	36.25	29.5	45.875	1/5	115/60/1	5.5	5-15P	10	352
EMST46X	2	2	46.875	29.5	45.875	1/4	115/60/1	6.5	5-15P	10	407
EMST60X	2	2	60.25	29.5	45.875	1/4	115/60/1	7.0	5-15P	10	462
EMST70X	3	3	70.375	29.5	45.875	3/4	115/60/1	9.4	5-15P	10	528