

# Solid Hinged Lid Chest Freezers

| Model | Size       | Freon |
|-------|------------|-------|
| CF-10 | 10.0 Cu-Ft | R600a |



## STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Thermometer supplied
- Operating temperature -8°F to 0°F
- Drainage is in front, easy to collect water
- Fast freeze time
- Low noise level
- Internal coved corners, easy to clean
- Coated wire basket included
- Balance able hinges on the door, stop from 45° to 75° angle
- Power cord supplied, 6 foot length, NEMA5-15P
- Warranty: 1 year parts and labor



CONFORMS TO UL STD.NO.60335-2-89

CERTIFIED TO CSA STD. C22.2 NO.60335-2-89

CONFORMS TO NSF STD.7

Intertek  
3 1 3 3 2 4 9

Intertek  
3 1 3 3 2 4 9

FREEZERS

\*Not suitable for installation in a non-commercial or residential applications.


| Items             | Description           |
|-------------------|-----------------------|
| External top/side | White Precoated Steel |
| Door              | White Precoated Steel |
| External back     | White Precoated Steel |
| Cabinet internal  | Embossed Aluminum     |
| Internal floor    | Embossed Aluminum     |
| Insulation        | 2.5" foam             |
| Lighting          | No lighting           |

| Items                | Description                      |
|----------------------|----------------------------------|
| Temperature control  | Mechanical 1 to 7 is the coldest |
| Comply to standard   | ANSI / NSF-7                     |
| Refrigerating system | Capillary tube                   |
| Refrigerant          | R600a                            |
| Temperature          | -8°F to 0°F                      |
| Evaporator/Condenser | Aluminum + Copper                |
| Condensing unit      | Side mount                       |
| Doors                | Hinged with no door lock         |



# DETAILS AND DIMENSIONS

## CF-10

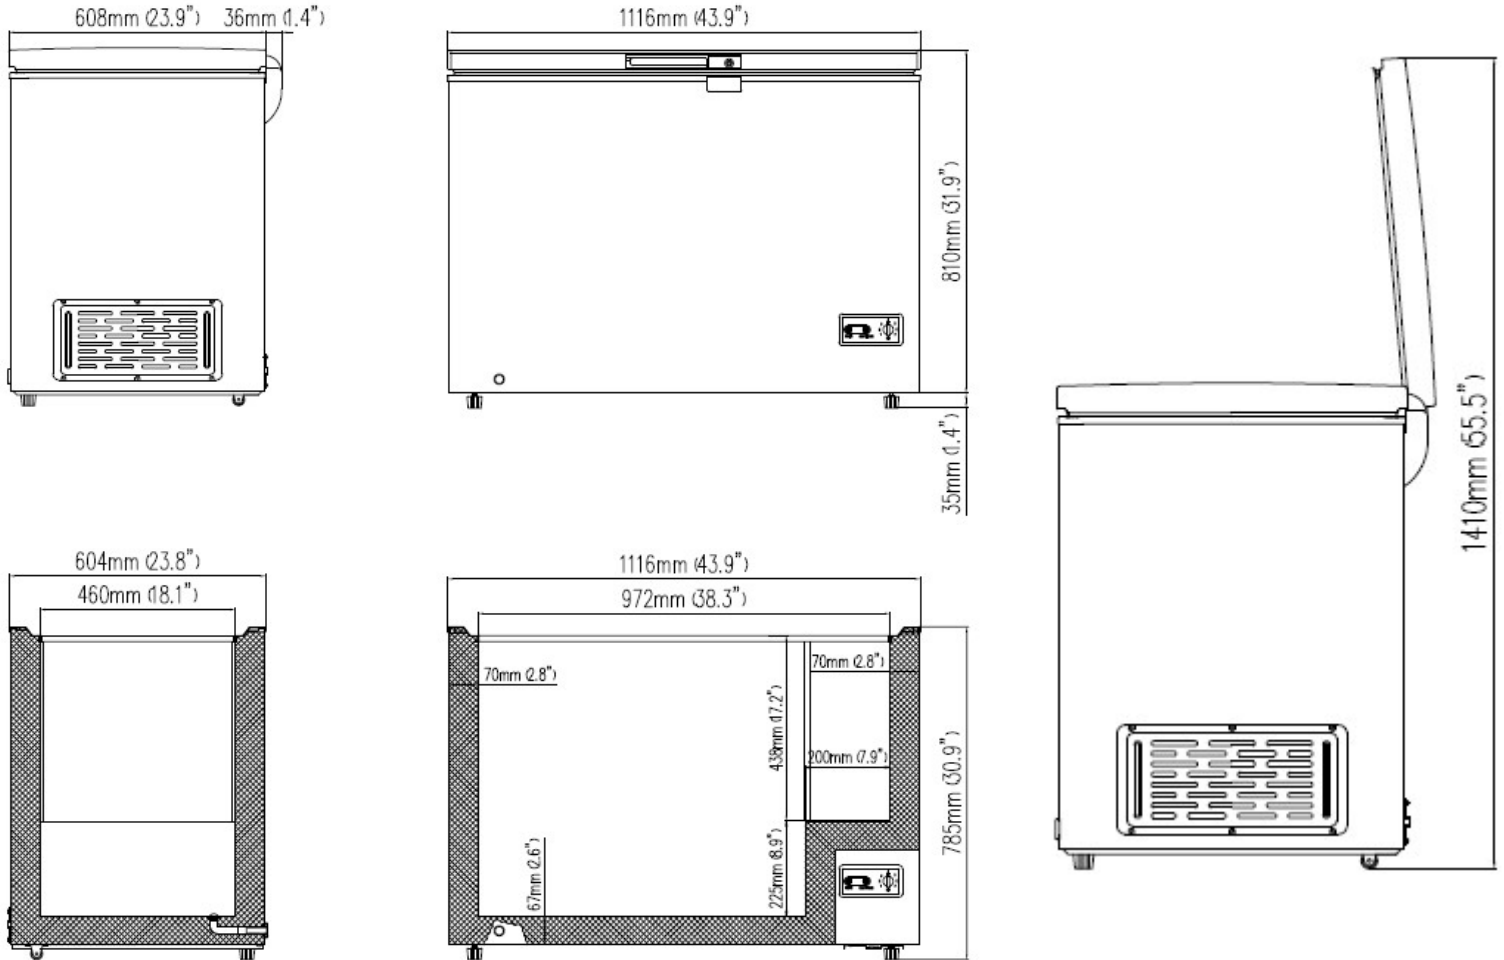

| Model | # of Doors | # of Baskets | Appx Storage CAP (Cu-ft) | Cabinet Dim (in) |      |      | HP  | Voltage /Hz /ph | Amp | NEMA Plug | Cord Lgth (ft) | Uncrated / Crated Weight |
|-------|------------|--------------|--------------------------|------------------|------|------|-----|-----------------|-----|-----------|----------------|--------------------------|
|       |            |              |                          | W                | D    | H    |     |                 |     |           |                |                          |
| CF-10 | 1          | 1            | 10                       | 43.9             | 25.3 | 33.3 | 1/4 | 115/60/1        | 2.2 | 5-15P     | 6.0            | 82/93                    |