

Solid Hinged Lid Chest Freezers

| Model | Size | Freon |
|-------|------------|-------|
| CF-20 | 19.8 Cu-Ft | R290 |



STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Thermometer supplied
- Operating temperature -8°F to 0°F
- Drainage is in front, easy to collect water
- Fast freeze time
- Extra strong handle
- Door Locks
- Low noise level
- Internal coved corners, easy to clean
- Coated wire basket included
- Balance able hinges on the door, stop from 45° to 75° angle
- Power cord supplied, 6 foot length, NEMA5-15P
- Warranty: 1 year parts and labor



CONFORMS TO UL STD.NO.60335-2-89
 CERTIFIED TO CSA STD. C22.2 NO.60335-2-89
 CONFORMS TO NSF STD.7

*Not suitable for installation in a non-commercial or residential applications.

| Items | Description |
|-------------------|-----------------------|
| External top/side | White Precoated Steel |
| Door | White Precoated Steel |
| External back | White Precoated Steel |
| Cabinet internal | Embossed Aluminum |
| Internal floor | Embossed Aluminum |
| Insulation | 2.5" foam |
| Lighting | No lighting |


| Items | Description |
|----------------------|----------------------------------|
| Temperature control | Mechanical 1 to 7 is the coldest |
| Comply to standard | ANSI / NSF-7 |
| Refrigerating system | Capillary tube |
| Refrigerant | R290 |
| Temperature | -8°F to 0°F |
| Evaporator/Condenser | Aluminum + Copper |
| Condensing unit | Side mount |
| Doors | Hinged with door lock |

FREEZERS



DETAILS AND DIMENSIONS

CF-20

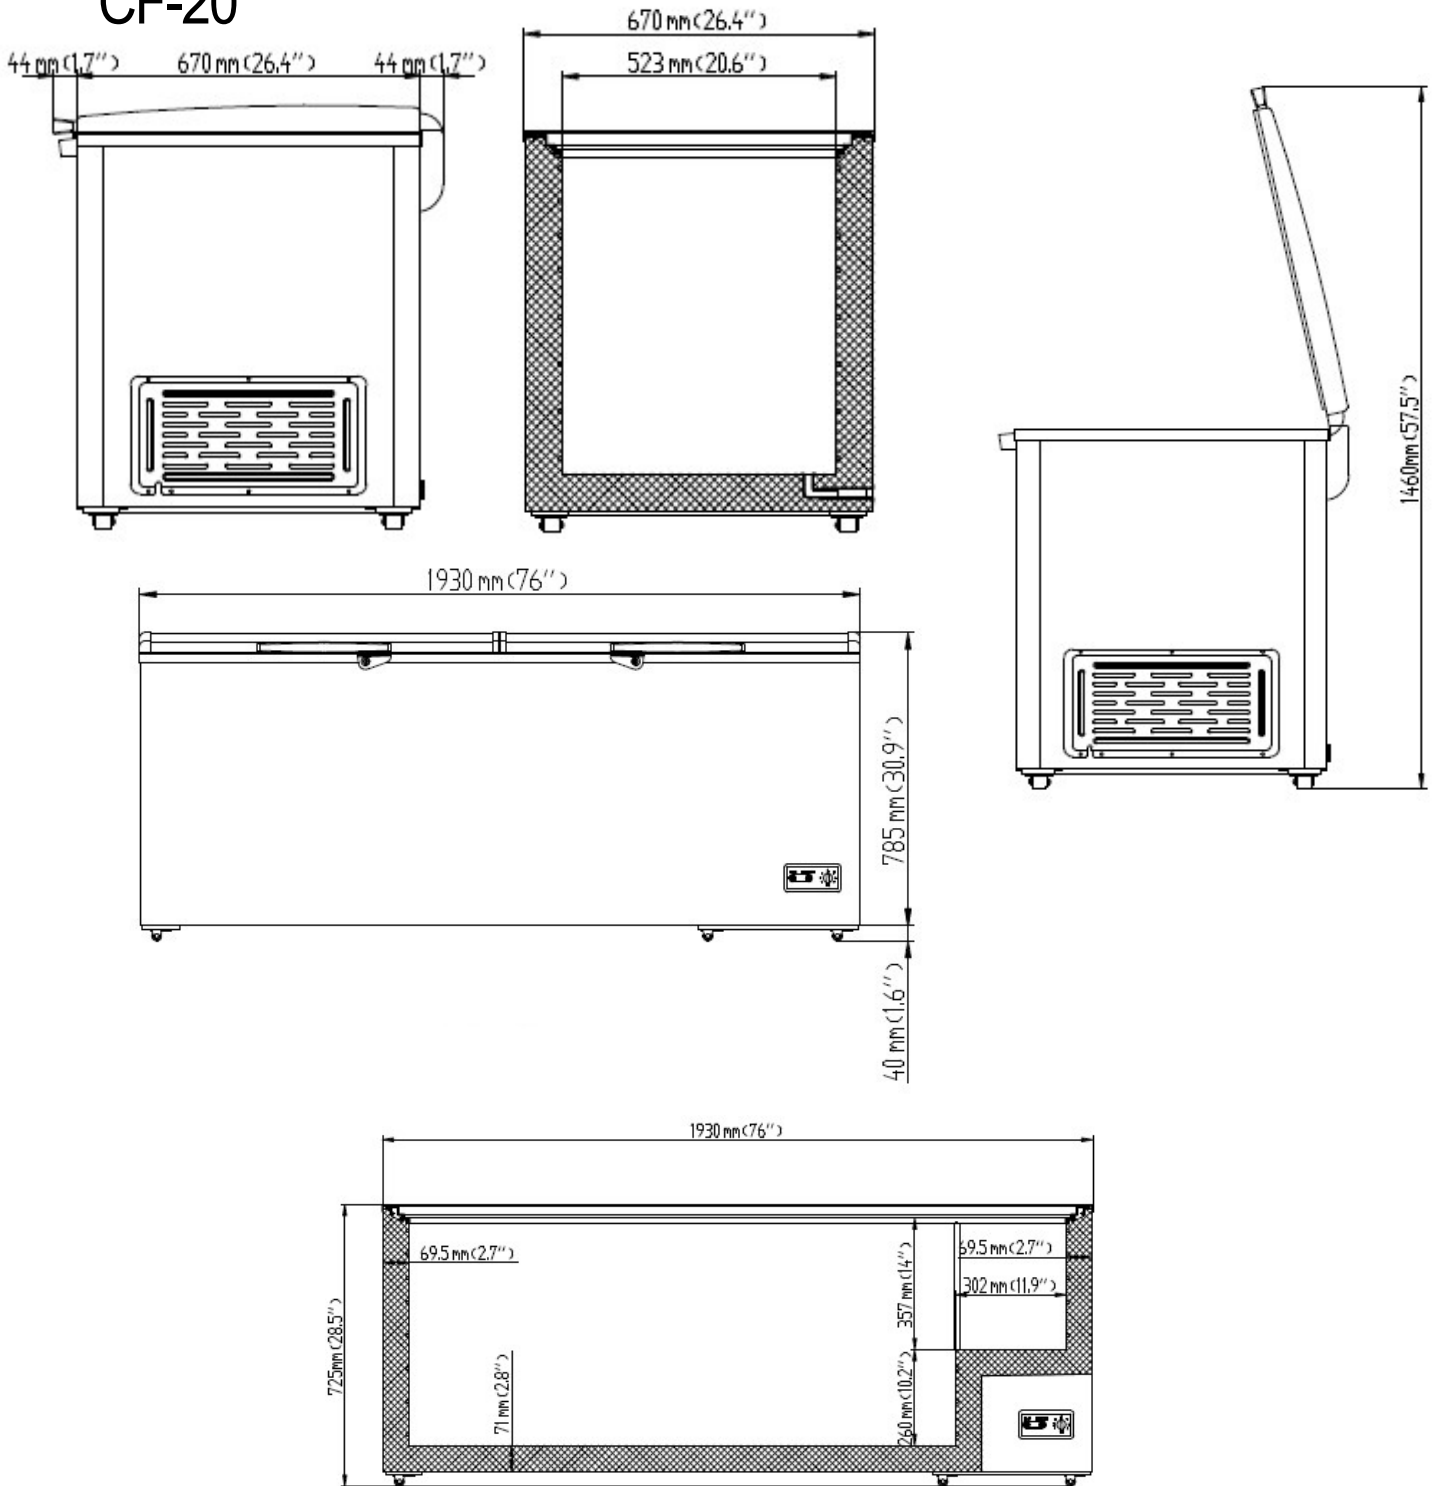

| Model | # of Doors | # of Baskets | Appx Storage CAP (Cu-ft) | Cabinet Dim (in) | | | HP | Voltage /Hz /ph | Amp | NEMA Plug | Cord Lgth (ft) | Uncrated / Crated Weight |
|-------|------------|--------------|--------------------------|------------------|------|------|-----|-----------------|-----|-----------|----------------|--------------------------|
| | | | | W | D | H | | | | | | |
| CF-20 | 2 | 2 | 20 | 76.0 | 29.8 | 32.5 | 1/2 | 115/60/1 | 3.6 | 5-20P | 6.0 | 156/184 |