

# Solid Hinged Lid Chest Freezers

Model	Size	Freon
CF-7	6.7 Cu-Ft	R600a

## STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Thermometer supplied
- Operating temperature -8°F to 0°F
- Drainage is in front, easy to collect water
- Fast freeze time
- Low noise level
- Internal coved corners, easy to clean
- Coated wire basket included
- Balance able hinges on the door, stop from 45° to 75° angle
- Power cord supplied, 6 foot length, NEMA5-15P
- Warranty: 1 year parts and labor



CONFORMS TO UL STD.NO.60335-2-89

CERTIFIED TO CSA STD. C22.2 NO.60335-2-89

Intertek  
3 1 3 3 2 4 9

Intertek  
3 1 3 3 2 4 9

CONFORMS TO NSF STD.7

\*Not suitable for installation in a non-commercial or residential applications.

Items	Description
External top/side	White Precoated Steel
Door	White Precoated Steel
External back	White Precoated Steel
Cabinet internal	Embossed Aluminum
Internal floor	Embossed Aluminum
Insulation	2.5" foam
Lighting	No lighting


Items	Description
Temperature control	Mechanical 1 to 7 is the coldest
Comply to standard	ANSI / NSF-7
Refrigerating system	Capillary tube
Refrigerant	R600a
Temperature	-8°F to 0°F
Evaporator/Condenser	Aluminum + Copper
Condensing unit	Side mount
Doors	Hinged, no door lock

FREEZERS



# DETAILS AND DIMENSIONS

## CF-7

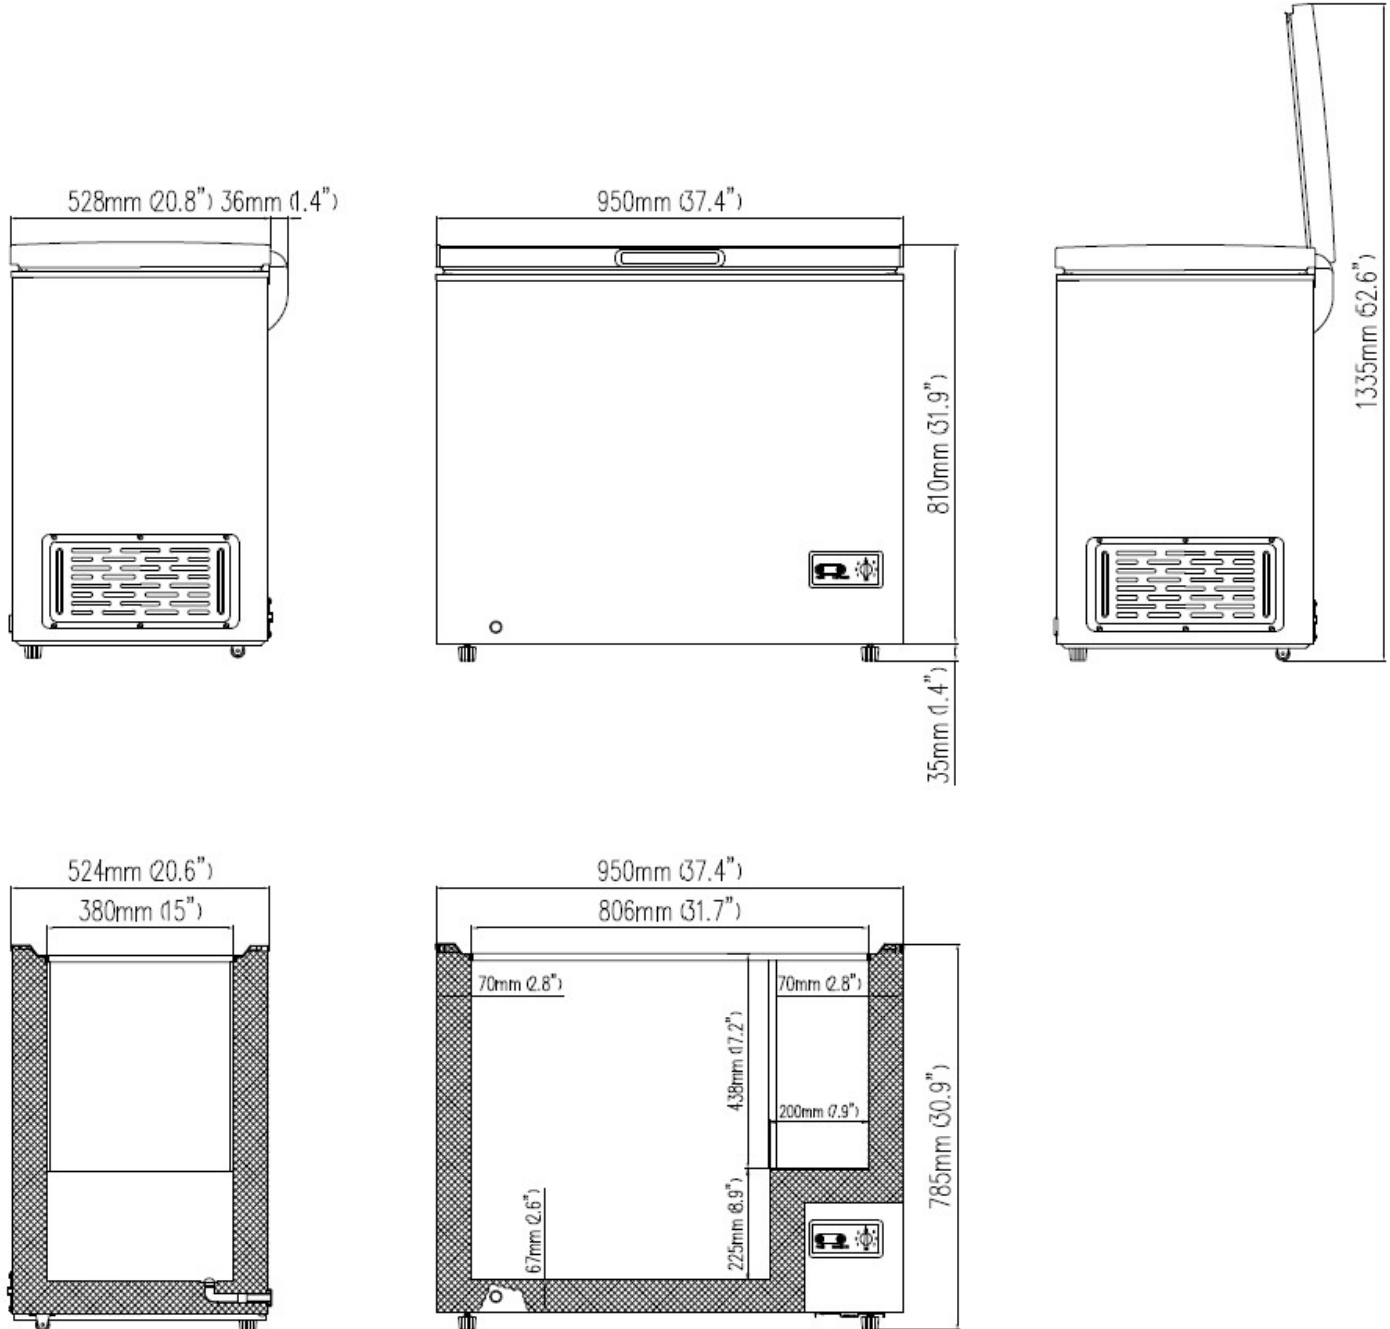

Model	# of Doors	# of Baskets	Appx Storage CAP (Cu-ft)	Cabinet Dim (in)			HP	Voltage /Hz /ph	Amp	NEMA Plug	Cord Lgth (ft)	Uncrated / Crated Weight
				W	D	H						
CF-7	1	1	7	37.4	22.2	33.3	1/6	115/60/1	1.4	5-15P	6.0	68/77