

Flat Glass Ice Cream Freezer

Model	Size	Refrigerant		
SD-180	5.3 Cu-Ft	R290		

STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Mechanical Thermostat adjust from -15°F to 36°F
- Drainage is in rear
- Fast freeze time
- Flat Sliding Glass Doors-Top LOW-E Tempered Glass for easy view. Locks & Keys included.
- Low noise level
- Internal coved corners, easy to clean
- Removable PVC coated basket included for easy organizing
- Big casters for easy moving
- Manual Defrost
- Uses R290 refrigerant, which is eco-friendly and more efficient
- Warranty: 1 year parts and labor

*Not suitable for installation in a non-commercial or residential applications.

Items	Description				
External top/side	Flat Glass Sliding Door				
Door	LOW-E Tempered Glass w/Lock				
External back	White Precoated Steel				
Cabinet internal	Embossed Aluminum				
Internal floor	Embossed aluminum				
Insulation	2.5" foam				
Lighting	None				

Intertek

CONFORMS TO UL STD.NO.60335-2-89

CERTIFIED TO CSA STD. C22.2 NO.60335-2-89

ek Intertek CONFORMS TO NSF STD.7


3133249 3133249					
Items	Description				
Temperature control	Mechanical 1 to 7				
Comply to standard	ANSI / NSF-7				
Refrigerating system	Capillary tube				
Refrigerant	R290				
Temperature	-15°F to 36°F				
Evaporator/Condenser	Aluminum + Copper				
Condensing unit	Side mount				

Customer Service (704) 900-2068 Email: greatfood@entree.biz Website: www.entree.biz

5	
M	
ш	
N	
ш	
ш	
M	
1.1	



DETAILS AND DIMENSIONS

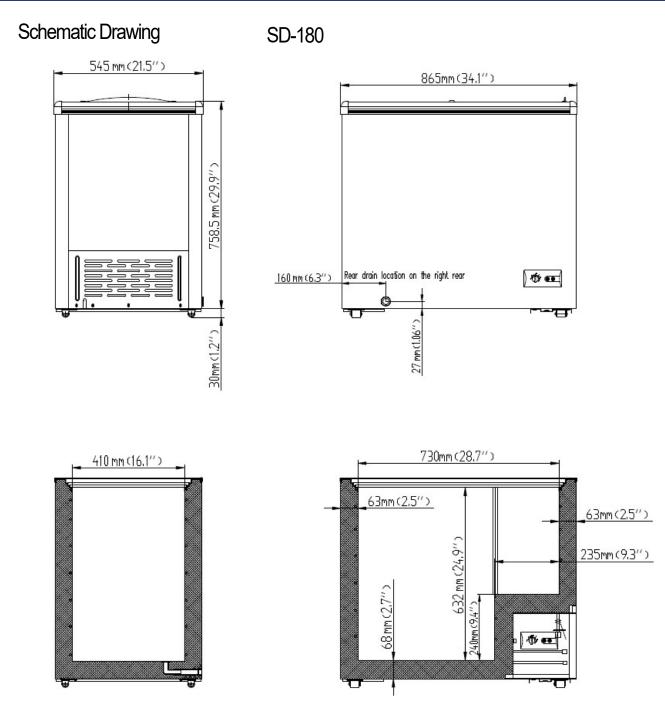

Model	# of Doors	# of Baskets	Appx. Storage Cap. (Cu/Ft)	Cabinet Dim (in)			НР	Voltage /Hz /ph	Amp	NEMA Plug	Cord Lgth	Uncrated / Crated
				W	D	Н		///2/p//		l lug	(ft)	Weight
SD-180	2	2	5.3	34.1	21.5	31.1	1/4	115/60/1	2.0	5-15P	6	80/91

As continued product improvement is a policy of Entree, specifications are subject to change without notice.