




Series "B"

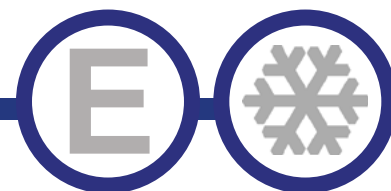

REFRIGERATORS AND FREEZERS

ERB12X



ERB19X



ERB35X

| Model | Doors |
|--------|-------|
| ERB12X | 1 |
| ERB19X | 1 |
| ERB35X | 2 |
| EFB12X | 1 |
| EFB19X | 1 |
| EFB35X | 2 |

STANDARD FEATURES

- Stainless steel exterior & interior floor, interior and back aluminum. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C). And Freezer -8°F to 0°F.
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting - safety shielded.
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.
- Preinstalled 4" swivel casters with brakes.

Models ERB12X & EFB12X

- LED lighting on ERB12X & EFB12X)
- Leveling feet only (No Casters available.)
- Warranty: One year parts and labor, two additional two years on compressor.


*Not suitable for installation in a non-commercial or residential applications.

| Items | Description | Items | Description |
|--------------------|---------------------------------|----------------------|--|
| Front, top & sides | Stainless steel | Temperature control | Solid state thermostat/Digital display |
| Doors | Stainless steel, liner aluminum | Approvals | ETL Listed |
| External back | Aluminum | Refrigerating system | Capillary tube |
| Cabinet interior | Aluminum | Refrigerant | R290 |
| Interior floor | Stainless Steel | Temperature range | (R) 33-41F; (F) 0° to -8°F |
| Insulation | Polyurethane (CFC free) | Evaporator | Powder coated aluminum/copper |
| Shelves | Heavy duty, PVC coating | Condensing unit | Bottom mounted |

CONFORMS TO NSF/ANSI STD 7



DETAILS AND DIMENSIONS

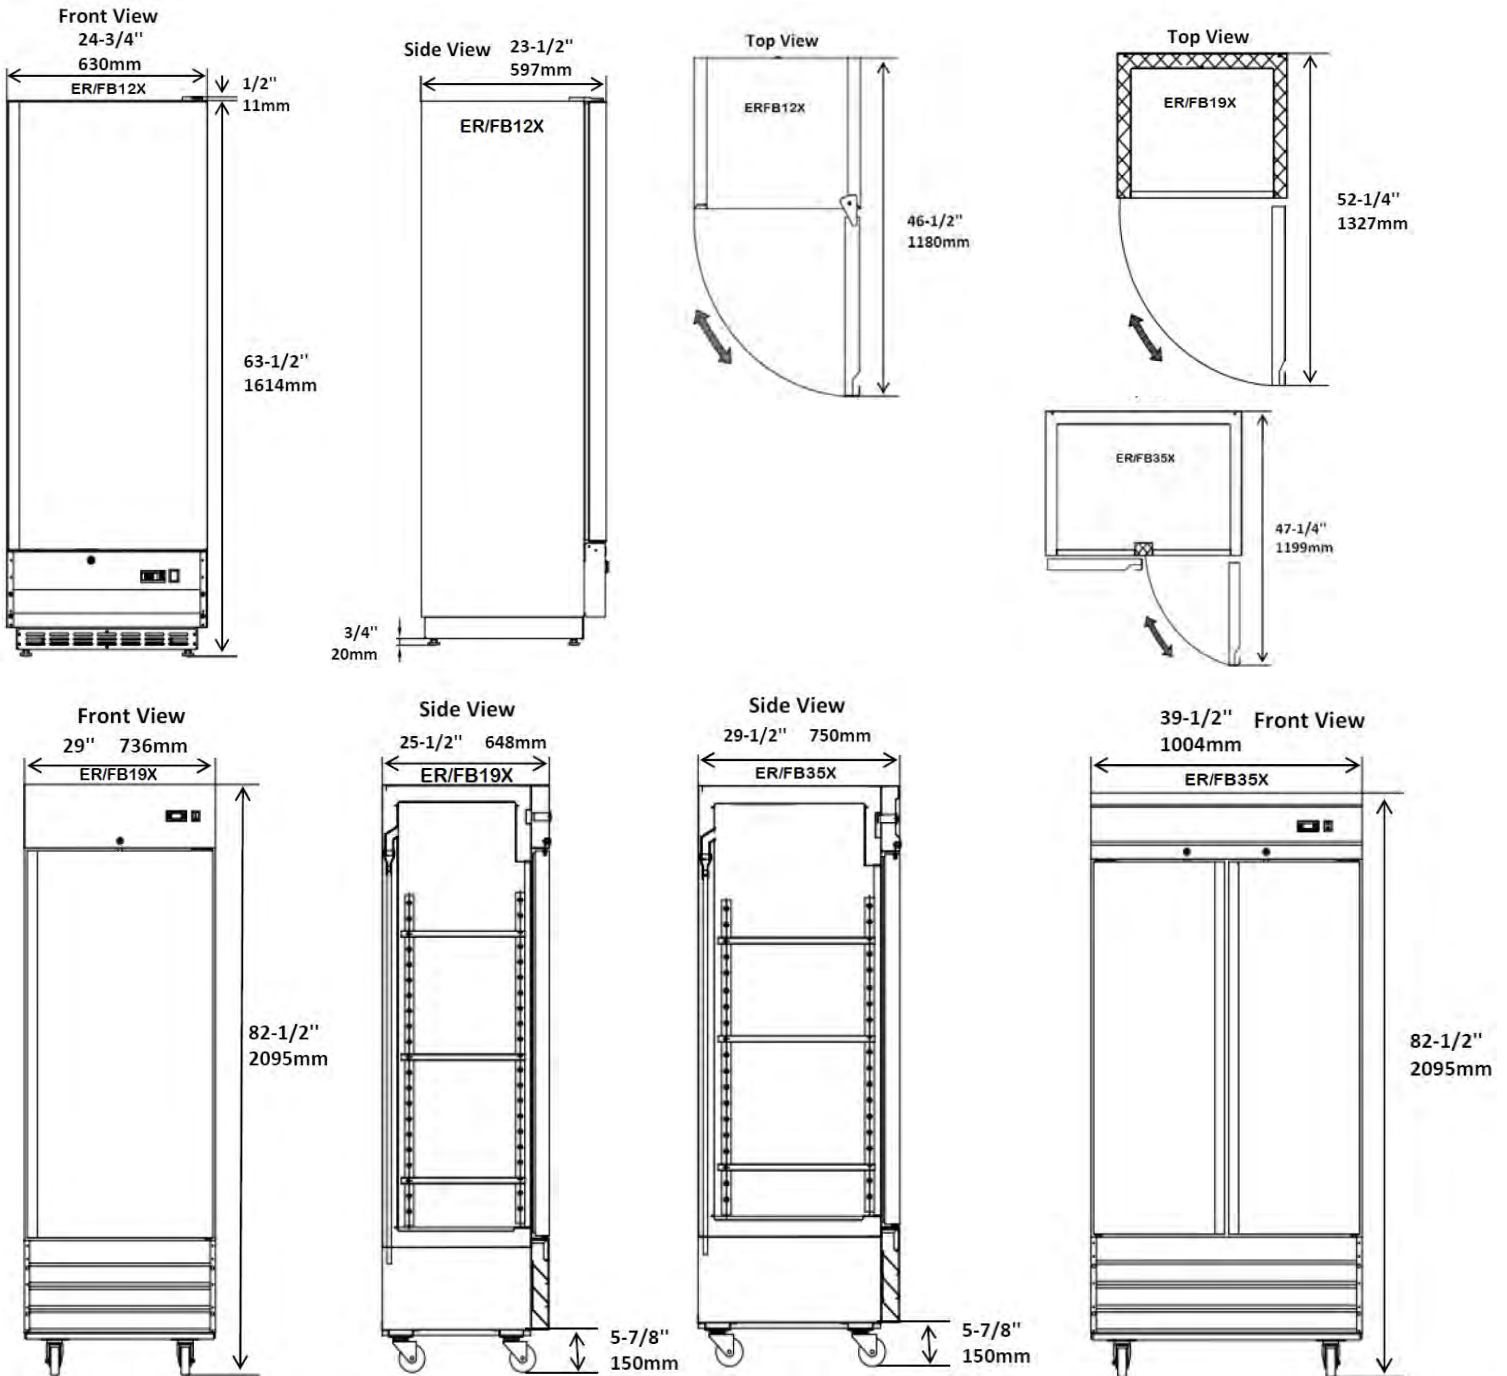

| Model | Doors | Shelves | Cabinet Dim (inches) | | | HP | Voltage | Amps | NEMA Plug | Cord Length | Crated Weight |
|--------|-------|---------|----------------------|------|------|-----|----------|------|-----------|-------------|---------------|
| | | | L | D | H | | | | | | |
| ERB12X | 1 | 3 | 24.75 | 23.5 | 63.5 | 1/6 | 115/60/1 | 2.3 | 5-15P | 10 | 180 |
| EFB12X | 1 | 3 | 24.75 | 23.5 | 63.5 | 1/4 | 115/60/1 | 4.0 | 5-15P | 10 | 183 |
| ERB19X | 1 | 3 | 29.0 | 25.5 | 82.5 | 1/5 | 115/60/1 | 2.8 | 5-15P | 10 | 297 |
| EFB19X | 1 | 3 | 29.0 | 25.5 | 82.5 | 1/2 | 115/60/1 | 5.9 | 5-15P | 10 | 297 |
| ERB35X | 2 | 6 | 39.5 | 29.5 | 82.5 | 1/4 | 115/60/1 | 4.3 | 5-15P | 10 | 308 |
| EFB35X | 2 | 6 | 39.5 | 29.5 | 82.5 | 1 | 115/60/1 | 7.8 | 5-15P | 10 | 308 |