

### Series "B"

# REFRIGERATORS AND FREEZERS -GLASS DOOR MODELS





Model	Doors				
ERB1X-G	1				
ERB2X-G	2				
ERB3X-G	3				
EFB1X-G	1				
EFB2X-G	2				

### STANDARD FEATURES

- Stainless steel exterior and interior floor, interior and back aluminum. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C). And Freezer -8°F to 0°F.
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Interior efficient LED lighting.
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.

\*Not suitable for installation in a non-commercial or residential applications.


Items	Description	Items	Description			
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display			
Doors	Stainless steel frame / Glass	Approvals	ETL Listed			
External back	Aluminum	Refrigerating system	Capillary tube			
Cabinet interior	Aluminum	Refrigerant	R290			
Interior floor	Stainless Steel	Temperature range	(R) 33-41F; (F) 0° to -8°F			
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper			
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted			

#### CONFORMS TO NSF/ANSI STD 7





## **DETAILS AND DIMENSIONS**

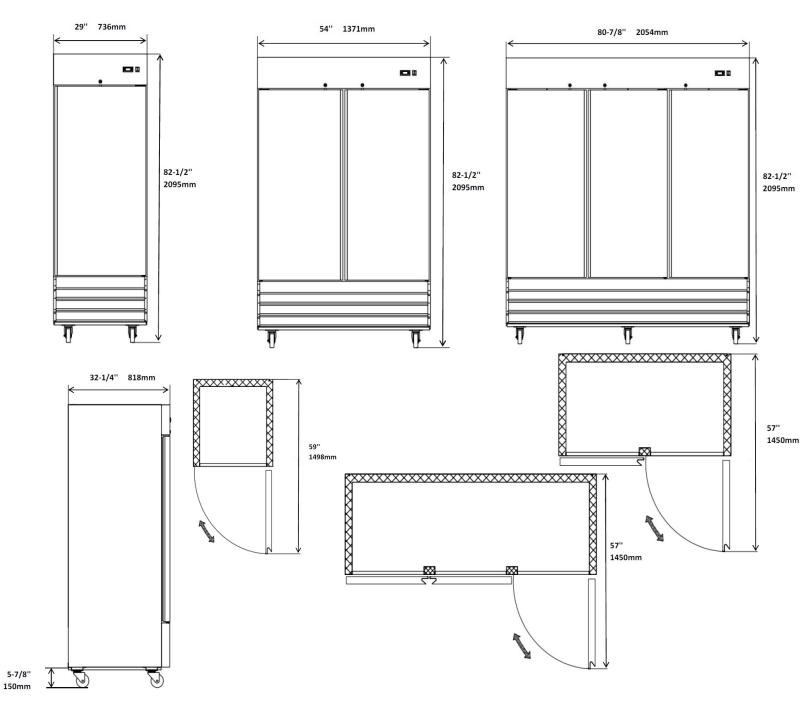

Model	Doors	Shelves	Cabin L	et Dim (in D	iches) H	HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
ERB1X-G	1	3	29	32.25	82.5	1/5	115/60/1	2.9	5-15P	10	337
ERB2X-G	2	6	54	32.25	82.5	1/4	115/60/1	4.6	5-15P	10	513
ERB3X-G	3	9	80.875	32.25	82.5	3/4	115/60/1	10.9	5-15P	10	704
EFB1X-G	1	3	29	32.25	82.5	1/2	115/60/1	7.68	5-15P	10	352
EFB2X-G	2	6	54	32.25	82.5	1	115/60/1	11.2	5-15P	10	574