




Series "A"



Top Mount Reach-In Refrigerators/ Freezers

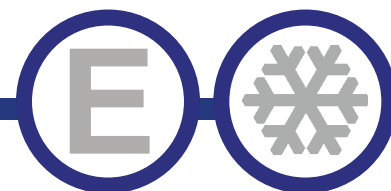

Model
CR1-TSI-ES-HC / CF1-TSI-HC
CR2-TSI-ES-HC / CF2-TSI-HC
CR3-TSI-HC / CF3-TSI-DV-HC

Energy Star 5.0 Approved

Energy Star 5.0 Approved

STANDARD FEATURES

- CFC Free Refrigerant and foam with self contained capillary tube system
- Electronic thermostat and digital LED temperature display for accurate control
- Stainless steel front and sides
- LED interior lights
- Self closing doors remain open past 90°
- Heating element concealed in the door frame to eliminate condensation (Freezers only)
- Magnetic gasket can be replaced without tool
- Door Locks
- Larger fan motors and blades for more efficient air flow for fast recovery times
- Adjustable heavy duty epoxy coated wire shelves
- Condensate heating element built into condensate pan to evaporate excess and expel freon heat
- Integrated door handle
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides and 2" rear

*Not suitable for installation in anon-commercial or residential applications.

Items	Description	Items	Description
Front, Top & Sides	430 Stainless steel	Temperature control	Solid State T-stat with Digital Display
Door	202 Stainless steel	Comply to standard	ETL Listed
External back	430 Stainless steel	Refrigerating system	Capillary tube
Cabinet internal	430 Stainless steel	Refrigerant	R290
Internal floor	304 Stainless steel	Temperature Range	(CR) 34°F to 38°F, (CF) -1°F to -11°F
Insulation	Polyurethane (CFC free)	Evaporator/Condenser	Aluminum + Copper
Shelves	Heavy duty, epoxy coating – 3 or 4 layers	Condensing unit	Top Mounted

REFRIGERATION / FREEZERS

Customer Service (704) 900-2068
 Email: greatfoods@entree.biz
 Fax (888) 388-6017 • www.entree.biz




Certified To ANSI/NSF 7 Standards






DETAILS AND DIMENSIONS


CR1-TSI-ES-HC / CF1-TSI-HC

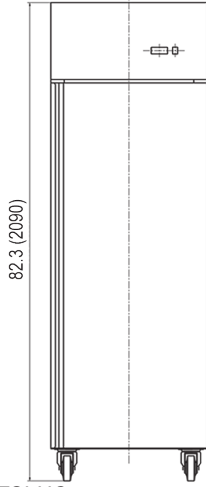

CR1-TSI-HC / CF1-TSI-HC




CR1-TSI-ES-HC / CF1-TSI / CR2-TSI-ES-HC / CF2-TSI-HC

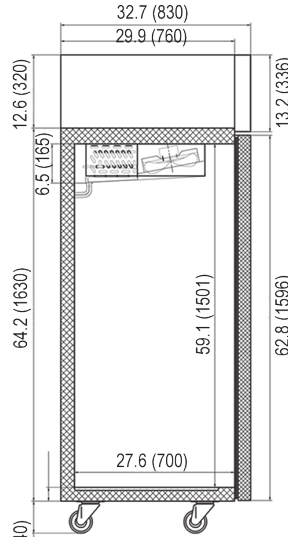


CR3-TSI-HC / CF3-TSI-DV-HC


CR2-TSI-ES-HC / CF2-TSI-HC

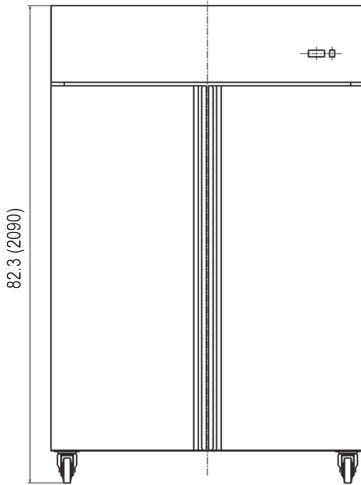


CR2-TSI-ES-HC / CF2-TSI-HC

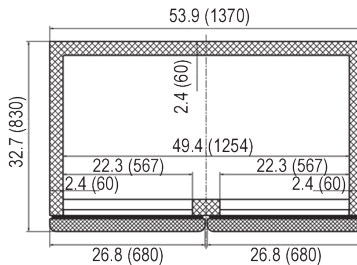


CR3-TSI-HC / CF3-TSI-DV-HC

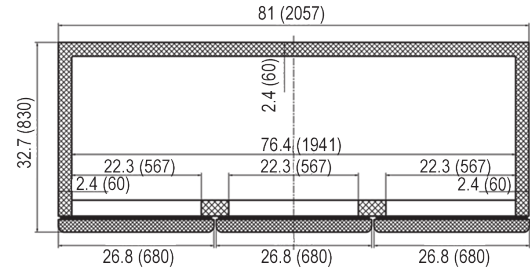

CR3-TSI-HC
CF3-TSI-DV-HC

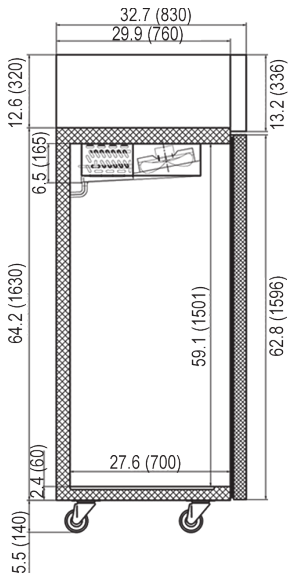

CR3-TSI-HC / CF3-TSI-DV-HC

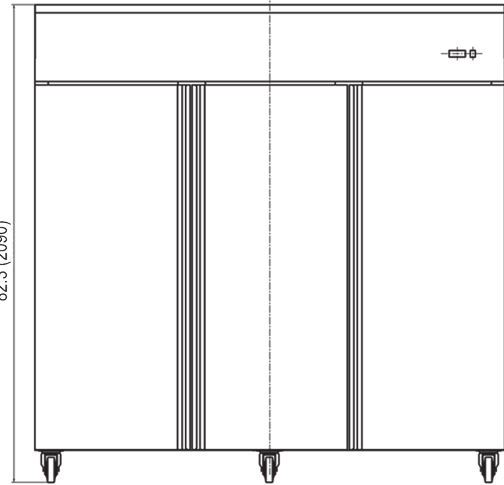

Model	Doors	Cabinet Dim (in) External			HP	Voltage /Hz /ph	Amp	NEMA Plug	Cord Lgth (ft)	Crated Weight (lbs)
		W	D	H						
CR1-TSI-ES-HC	1	26.8	32.7	82.3	1/5	115/60/1	3.0	5-15P	10	350
CR2-TSI-ES-HC	2	53.9	32.7	82.3	1/4	115/60/1	4.5	5-15P	10	518
CR3-TSI-HC	3	81	32.7	82.3	1/2	115/60/1	7.0	5-15P	10	669
CF1-TSI-HC	1	26.8	32.7	82.3	1/2	115/60/1	8	5-15P	10	364
CF2-TSI-HC	2	53.9	32.7	82.3	1.0	115/60/1	9	5-15P	10	568
CF3-TSI-DV-HC	3	81	32.7	82.3	1-1/4	115-230/60/1	9	L14-20	10	776