




# Series "B"



## HALF DOOR REFRIGERATORS AND FREEZERS

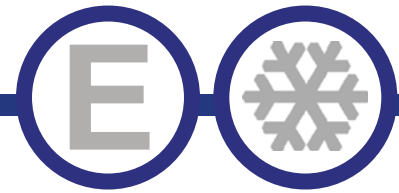

| Model    | Half Doors |
|----------|------------|
| ERB1X-2H | 2          |
| ERB2X-4H | 4          |
| ERB3X-6H | 6          |
| EFB1X-2H | 2          |
| EFB2X-4H | 4          |
| EFB3X-6H | 6          |

### STANDARD FEATURES

- Stainless steel exterior & interior floor, interior and back aluminum. Option of bright white aluminum interior available.
- Stainless Interior available - add suffix "-SI" to the model number. i.e. ERB1X-2H-SI
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C) and freezers -8°F and 0°F (-22°C to -18°C).
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting, safety shielded.
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.

**\*Not suitable for installation in a non-commercial or residential applications.**


| Items              | Description                      | Items                | Description                            |
|--------------------|----------------------------------|----------------------|----------------------------------------|
| Front, top & sides | Stainless steel                  | Temperature control  | Solid state thermostat/Digital display |
| Doors              | Stainless steel / Aluminum Liner | Approvals            | ETL Listed                             |
| External back      | Aluminum                         | Refrigerating system | Capillary tube                         |
| Cabinet interior   | Aluminum                         | Refrigerant          | R290                                   |
| Interior floor     | Stainless Steel                  | Temperature range    | (R) 33-41F; (F) -8° to -0°F            |
| Insulation         | Polyurethane (CFC free)          | Evaporator           | Powder coated aluminum/copper          |
| Shelves            | Heavy duty, PVC coating          | Condensing unit      | Bottom mounted                         |

**CONFORMS TO NSF/ANSI STD 7**

REFRIGERATION



# DETAILS AND DIMENSIONS

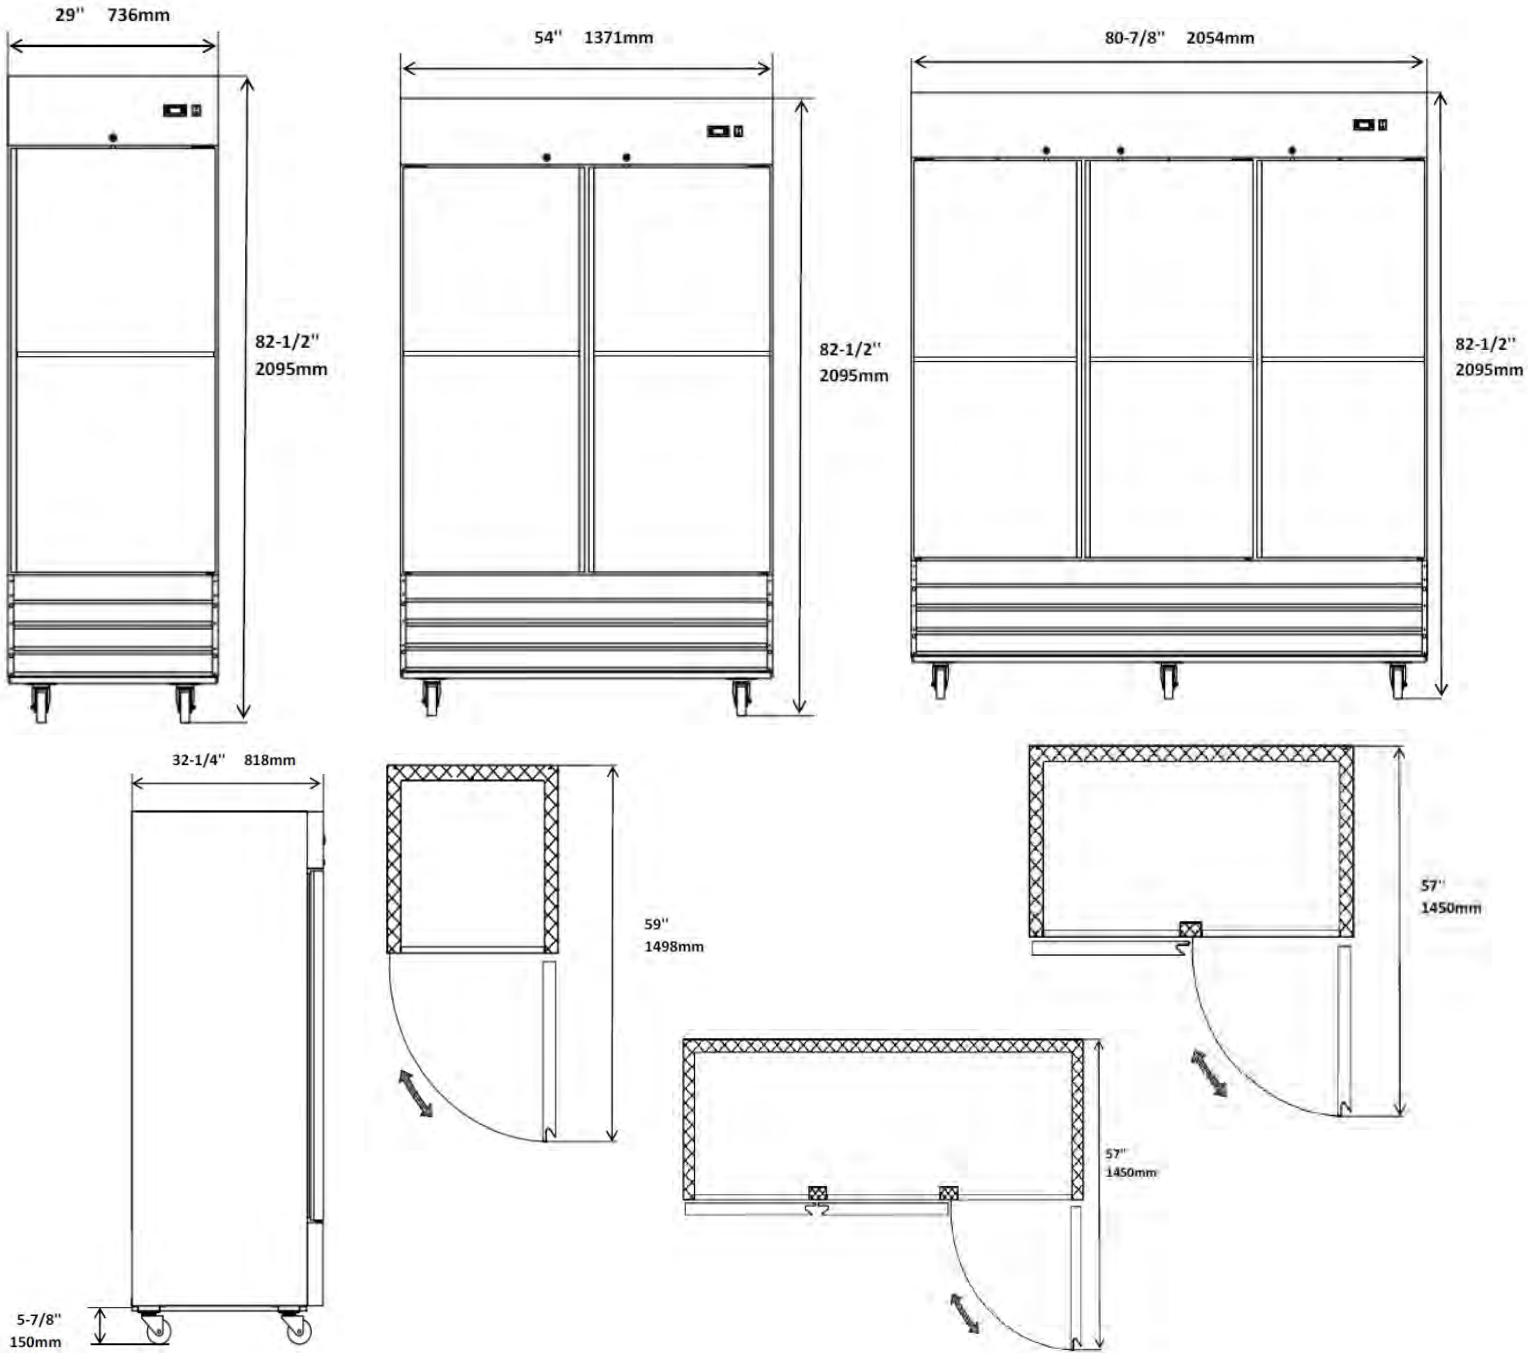

| Model    | Doors | Shelves | Cabinet Dim (inches) |       |      | HP    | Voltage  | Amps | NEMA Plug | Cord Length | Crated Weight |
|----------|-------|---------|----------------------|-------|------|-------|----------|------|-----------|-------------|---------------|
|          |       |         | L                    | D     | H    |       |          |      |           |             |               |
| ERB1X-2H | 2     | 3       | 29                   | 32.25 | 82.5 | 1/5   | 115/60/1 | 2.8  | 5-15P     | 10          | 337           |
| ERB2X-4H | 4     | 6       | 54                   | 32.25 | 82.5 | 1/4   | 115/60/1 | 4.6  | 5-15P     | 10          | 513           |
| ERB3X-6H | 6     | 9       | 80.875               | 32.25 | 82.5 | 3/4   | 115/60/1 | 9.0  | 5-15P     | 10          | 746           |
| EFB1X-2H | 2     | 3       | 29                   | 32.25 | 82.5 | 1/2   | 115/60/1 | 7.9  | 5-15P     | 10          | 347           |
| EFB2X-4H | 4     | 6       | 54                   | 32.25 | 82.5 | 1     | 115/60/1 | 11.1 | 5-15P     | 10          | 559           |
| EFB3X-6H | 6     | 9       | 80.875               | 32.25 | 82.5 | 1 1/4 | 115/60/1 | 13.3 | 5-15P     | 10          | 746           |