

Flat Glass Ice Cream Freezer



Model	Size	Refrigerant		
SD-142	4.2 Cu-Ft	R290		



STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Mechanical Thermostat adjust from -15°F to 8°F
- Drainage is in rear
- Fast freeze time
- Flat Sliding Glass Doors-Top LOW-E Tempered Glass for easy view. Locks & Keys included.
- Low noise level
- Internal coved corners, easy to clean
- Removable PVC coated basket included for easy organizing
- Big casters for easy moving
- Manual Defrost
- Uses R290 refrigerant, which is eco-friendly and more efficient
- Warranty: 1 year parts and labor

*Not suitable for installation in a non-commercial or residential applications.

Items	Description		
External top/side	Flat Glass Sliding Door		
Door	LOW-E Tempered Glass w/Lock		
External back	White Precoated Steel		
Cabinet internal	Embossed Aluminum		
Internal floor	Embossed aluminum		
Insulation	2.5" foam		
Lighting	None		

Intertek

CONFORMS TO UL STD.NO.60335-2-89

CERTIFIED TO CSA STD. C22.2 NO.60335-2-89

tertek Intertek

CONFORMS TO NSF STD.7


Items	Description		
Temperature control	Mechanical 1 to 7		
Comply to standard	ANSI / NSF-7		
Refrigerating system	Capillary tube		
Refrigerant	R290		
Temperature	-15°F to 8°F		
Evaporator/Condenser	Aluminum + Copper		
Condensing unit	Side mount		

Customer Service (704) 900-2068 Email: greatfood@entree.biz Website: www.entree.biz

Form FGIC Rev 20240104



DETAILS AND DIMENSIONS

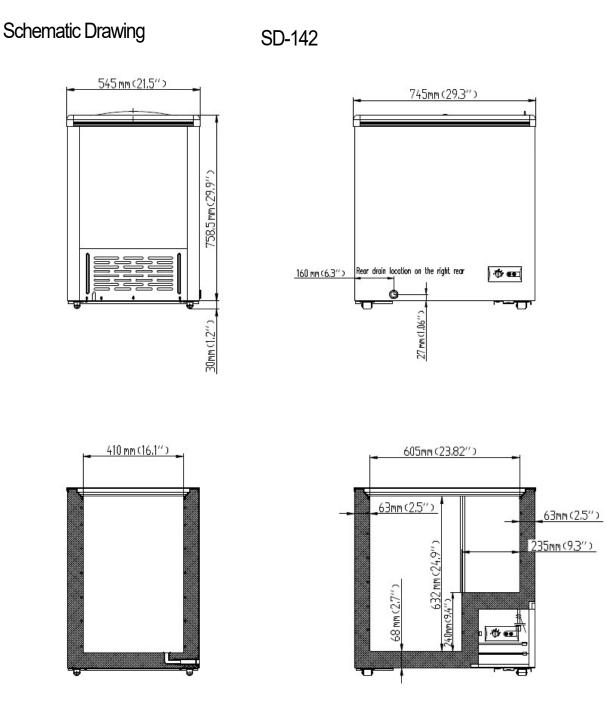

	Model # of Baskets		Appx. Storage Cap.	Cabinet Dim (in)			НР	Voltage /Hz /ph	Amp	NEMA Plug	Cord Lgth	Uncrated / Crated
	Dasket	Buskets	(Cu/Ft)	W	D	Н		/112 / p11		i lug	(ft)	Weight
	SD-142	1	4.2	29.3	21.5	31.1	1/4	115/60/1	2.0	5-15P	6	75/86