





Model	Size	Refrigerant		
SD-180	5.3 Cu-Ft	R290		



Model SD-142 Shown

STANDARD FEATURES

- CFC free refrigerant and 2.5" foam insulation
- Mechanical Thermostat adjust from -15°F to 8°F
- Drainage is in rear
- Fast freeze time
- Flat Sliding Glass Doors-Top LOW-E Tempered Glass for easy view. Locks & Keys included.
- Low noise level
- Internal coved corners, easy to clean
- Removable PVC coated basket included for easy organizing
- · Big casters for easy moving
- Manual Defrost
- Uses R290 refrigerant, which is eco-friendly and more efficient
- Warranty: 1 year parts and labor



Items	Description					
External top/side	Flat Glass Sliding Door					
Door	LOW-E Tempered Glass w/Lock					
External back	White Precoated Steel					
Cabinet internal	Embossed Aluminum					
Internal floor	Embossed aluminum					
Insulation	2.5" foam					
Lighting	None					

Customer Service (704) 900-2068 Email: greatfood@entree.biz Website: www.entree.biz





ek Interte

Intertek

CONFORMS TO UL STD.NO.60335-2-89
CERTIFIED TO CSA STD. C22.2 NO.60335-2-89


CONFORMS TO NSF STD.7

Items	Description				
Temperature control	Mechanical 1 to 7				
Comply to standard	ANSI / NSF-7				
Refrigerating system	Capillary tube				
Refrigerant	R290				
Temperature	-15°F to 8°F				
Evaporator/Condenser	Aluminum + Copper				
Condensing unit	Side mount				





DETAILS AND DIMENSIONS


Schematic Drawing

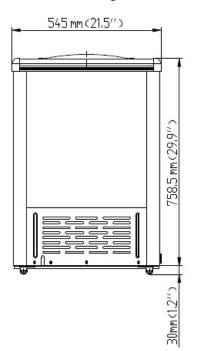

SD-180





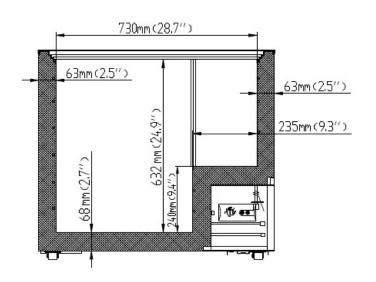

Model	# of Storage Baskets Cap. (Cu/Ft)	Cabinet Dim (in)			НР	Voltage /Hz/ph	Amp	NEMA Plug	Cord Lgth	Uncrated / Crated	
			W	D	Ι		/112/011		1 149	(ft)	Weight
SD-180	2	5.3	34.1	21.5	31.1	1/4	115/60/1	2.0	5-15P	6	80/91