

#### Series "B"

# **REFRIGERATED DELI CASES**





Model	Size
EDC36X	36" Unit
EDC47X	48" Unit
EDC64X	64" Unit
EDC79X	82" Unit

#### STANDARD FEATURES

- Interior: Aluminum liner with stainless steel floor
- Exterior: Black or White coated Steel. Stainless steel available.
- Rounded corner design inside of the cabinet makes it easy to clean the inside storage room.
- Attractive curved glass and sliding glass doors.
- Refrigeration system keeps meats and deli products at safe temperatures between 33°F and 43°F
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed 3" swivel casters with brakes.
- Easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Interior efficient LED lighting.
- Warranty: One year parts & labor warranty, and additional two years on compressor.

\*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description			
Exterior	Coated Steel	Temperature control	Solid state thermostat/Digital display			
Cabinet interior	Aluminum Liner	Approvals	ETL LISTED			
External back	Coated Steel	Refrigerating system	Capillary tube			
Interior floor	Stainless steel	Refrigerant	R290			
Insulation	Polyurethane (CFC free)	Temperature range	33°F to 43°F			
Shelves	elves Heavy duty, PVC coating		Powder coated aluminum/copper			
		Condensing unit	Bottom mounted			




CONFORMS TO NSF/ANSI STD 7






## **DETAILS AND DIMENSIONS**

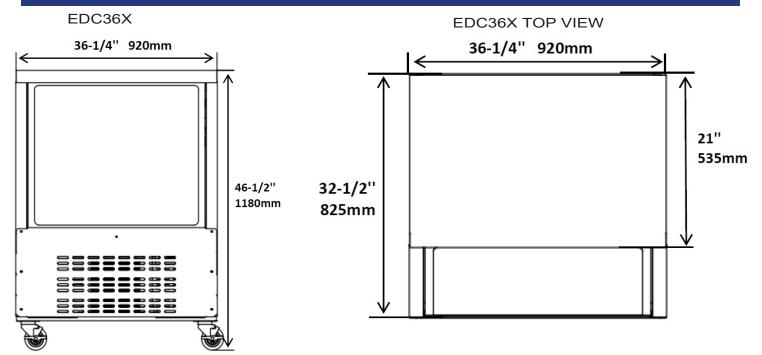

EDC47X TOP VIEW

EDC47X

Entrée

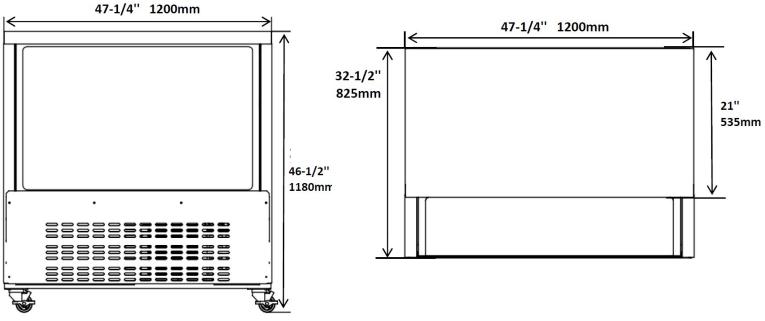


м	lodel	Doors	Shelves	Cabin L	et Dim (ir D	nches) H	HP	Voltage	Amps	NEMA Plug	Cord Length	Ship Weight
ED	DC36X	2	4	36	32.5	42.875	1/4	115/60/1	4.68	5-15P	10	297
ED	DC47X	2	6	48	32.5	42.875	1/4	115/60/1	3.12	5-15P	10	429
ED	DC64X	3	9	64	32.5	42.875	1/2	115/60/1	7.14	5-15P	10	484
ED	DC79X	3	9	82	32.5	42.875	3/4	115/60/1	7.14	5-15P	10	638



## **DETAILS AND DIMENSIONS**

64-1/4" 1630mm

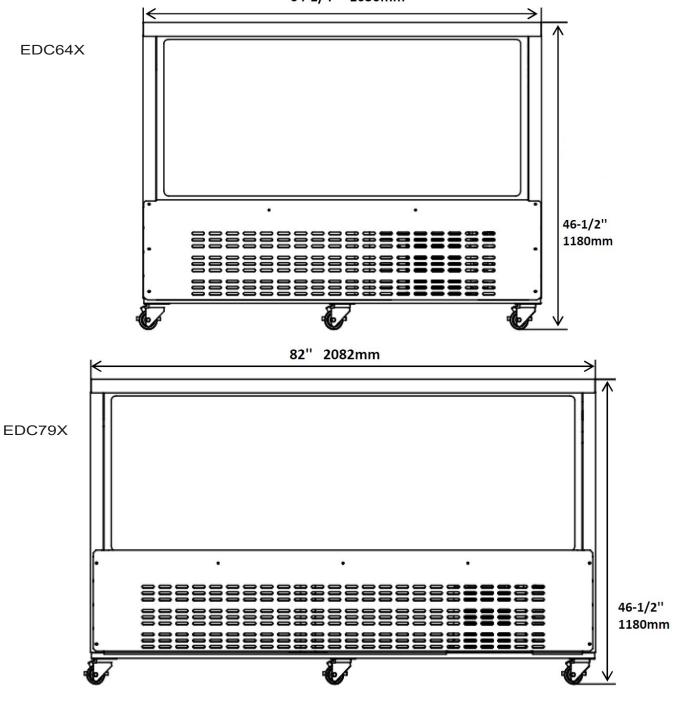


Model	Doors	Shelves	Cabin L	et Dim (in D	nches) H	HP	Voltage	Amps	NEMA Plug	Cord Length	Ship Weight
EDC36X	2	4	36	32.5	42.875	1/4	115/60/1	4.68	5-15P	10	297
EDC47X	2	6	48	32.5	42.875	1/4	115/60/1	3.12	5-15P	10	429
EDC64X	3	9	64	32.5	42.875	1/2	115/60/1	7.14	5-15P	10	484
EDC79X	3	9	82	32.5	42.875	3/4	115/60/1	7.14	5-15P	10	638




### **DETAILS AND DIMENSIONS**

SIDE VIEW ALL

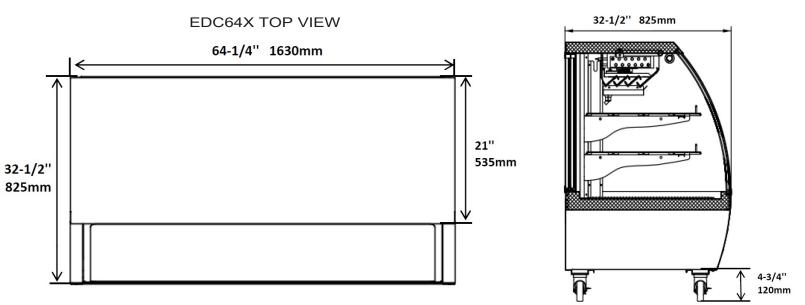

EDC79X TOP VIEW

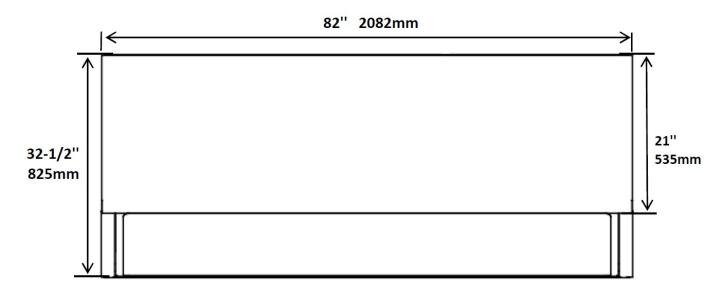

Model	Doors	Shelves	Cabinet Dim (inches) L D H		HP	Voltage	Amps	NEMA Plug	Cord Length	Ship Weight	
EDC36X	2	4	36	32.5	42.875	1/4	115/60/1	4.68	5-15P	10	297
EDC47X	2	6	48	32.5	42.875	1/4	115/60/1	3.12	5-15P	10	429
EDC64X	3	9	64	32.5	42.875	1/2	115/60/1	7.14	5-15P	10	484
EDC79X	3	9	82	32.5	42.875	3/4	115/60/1	7.14	5-15P	10	638