





HIGH SPEED OVEN

HSB-208 Model Shown



Exhaust port with


grease pan

Cooling fan

SPECIFICATIONS:

Solaris Model HSB-208, HSB-240, HSS-208, & HSS-240 is a single compartment high speed oven. The Solaris oven is designed to provide customers with fast, energy-efficient, easyto-operate cooking solutions that allow them to handle peak meal times with ease.

Solaris combines microwave, hot air impingement and smart cooking technologies to deliver fast cooking without compromising on food quality, while saving energy and reducing space requirement.



- Blower
- 2. Magnetron
- 3. Stirrer
- 4.
- 5. Heating element
- 6.
- Catalytic filter
- Air filter

Entree L.L.C. **Customer Service (704) 900-2068**

For Sales Info email: greatfood@entree.biz Website: www. entree.biz

Exterior Construction:

- Choice of matte black painted housing or stainless steel housing
- Die-cast front panel with choice of matte black paint or chrome plating
- Heat sink system to keep the housing below 55!C
- Ergonomic chrome door handle
- 4-inch adjustable feet (optional 2-inch)

Standard Features:

- Microwave system on top
- Single magnetron with stirrer for uniform microwave distribution
- Built-in catalytic filter, removable and replaceable
- External air filter
- Exhaust port with grease pan
- Heavy duty door hinges
- 5-inch touch screen
- Intelligent cooking system with 1024 recipes memory
- Software or recipe updates via USB
- Access to single-phase electricity
- Oven self-diagnostic function
- Power cord and plug (optional)

Standard accessories

- 1 pizza pan
- 1 teflon basket
- 1 round teflon mesh pad
- 1 shovel
- Inner hall grill

Certifications:






Optional Functions:


- ✓ Scan code and cook
- WIFI Connection

This appliance is for commercial indoor use only. **Not for household use, warranty is voided in noncommercial or residential applications.



Technical Drawing for both HSB & HSS Models

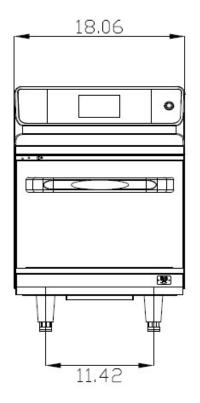

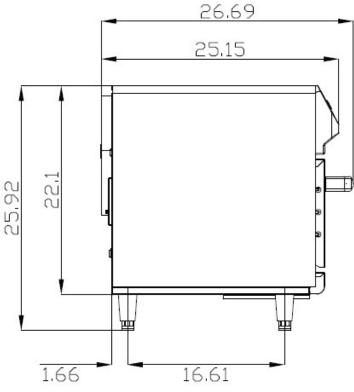

Model: HSB



Model: HSS



MODEL	5" Touch Screen		CAPACITY	Voltage/kW		Amperage		Power (kW)		Max Temp
	Menu Storage	Cooking Stage	US Liquid Gal.	208VAC	240VAC	208VAC	240VAC	*Microwave	Hot Air	(°F)
HSB-208	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSS-208	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSB-240	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSS-240	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F

MODEL	D	IMENSION (Inch	es)	INSID	Net Weight		
MODEL	Width	Depth	Height	Width	Depth	Height	Lbs.
HSB-208	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSS-208	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSB-240	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSS-240	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5