




Series "X"



DELI CASE with Lower Storage Area

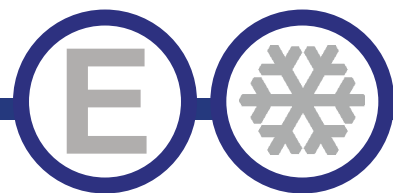

Solid panel over
compressor

NEMA 5-15S receptacle



Crumb Scoop on the
back door.

Two cords, one
for NEMA 5-15S
receptacle.

Swing door to allow larger pan
access on EDD50X only.

(Rear view shown without casters)

*Not suitable for installation in a non-commercial or residential applications.

Model	Size
EDD50X	50" Unit
EDD71X	71" Unit
EDD84X	84" Unit

STANDARD FEATURES

- **Deli Case-Lower Storage** offer two refrigerated compartments: one for display and one for storing ready-to-serve deli products.
- **L.E.D. Lighting** showcases displayed products.
- **Case:** Upper compartment with solid panel above condense unit to prevent compressor issues.
- **Attractive Low-E double-pane thermal glass** in display doors ensures maximum insulation for enhanced efficiency and energy savings.
- **Refrigeration system** maintains product temperature between 38°F to 40°F
- **A gravity coil refrigeration system** creates a high humidity environment for exceptional preservation of meats and deli products.
- **An electronic control system** simplifies temperature set point adjustments and an automatic defrost frequency.
- **NEMA 5-15S** Socket provided with separate power supply.
- **Doors:** All top doors are sliding doors. 50" model will have swing door on the lower compartment.
- **Easy to access condenser coil** facilitate cleaning and maintenance.
- **Environmentally friendly R290 refrigerant** which is Eco-friendly and more efficient.
- **Warranty:** Two year parts & labor warranty, and additional three years on compressor.

Items	Description	Items	Description
Exterior	Coated White	Temperature control	Solid state thermostat/Digital display
Cabinet interior	NSF Approved White Aluminum Liner	Approvals	ETL LISTED, Safety and Sanitation
External back	Stainless Steel or Coated White or Black	Refrigerating system	Capillary tube
Interior floor	Stainless steel floor with coved corners	Refrigerant	R290
Insulation	Polyurethane (CFC free)	Temperature range	38°F to 40°F
Shelves	Stainless steel panels	Evaporator	Powder coated aluminum/copper
		Condensing unit	Bottom mounted

Entrée L.L.C.
Customer Service (704) 900-2068
Email: greatfood@entree.biz
Website: www.entree.biz

CONFORMS TO NSF/ANSI STD 7




REFRIGERATION




DETAILS AND DIMENSIONS

EDD50X w/Lower
Swing Door


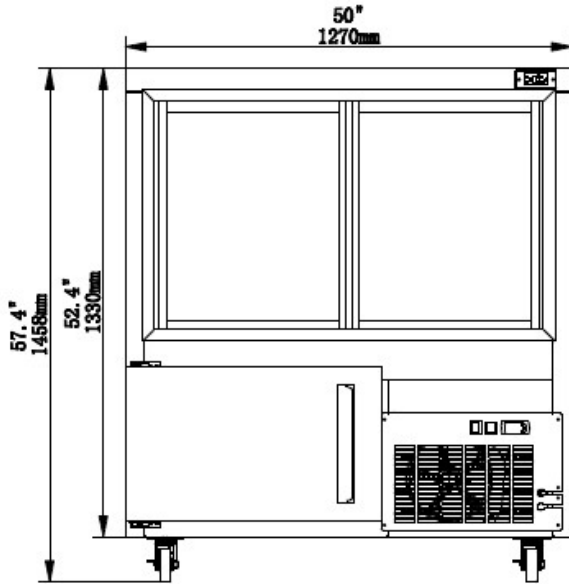


Rear View

EDD71X
Bottom Sliding Doors

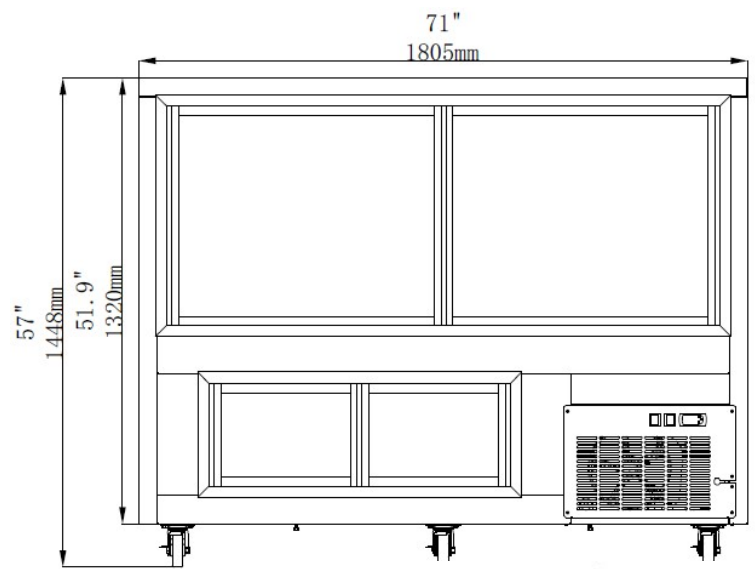

EDD84X
Bottom Sliding Doors

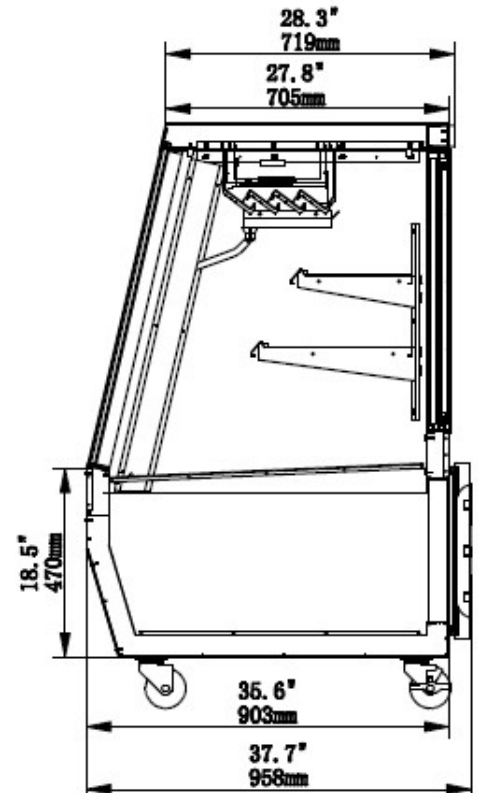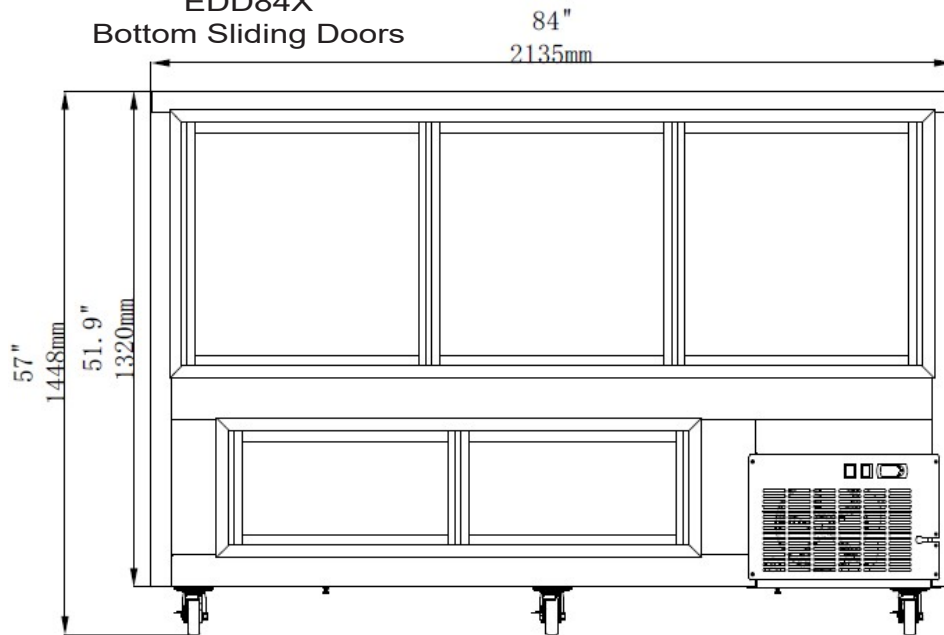

Model	Doors	Shelves	Main Cab Volume Ft ³	Lower Cab Volume Ft ³	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Ship Weight
					L	D	H						
EDD50X	2	2	20.58	6.14	50	35.50	57.00	4/5	115/60/1	4.4	5-15P	10	309
EDD71X	2	2	30.06	11.31	71	35.50	57.00	1	115/60/1	7.3	5-15P	10	419
EDD84X	3	2	35.92	14.50	84	35.50	57.00	1	115/60/1	7.7	5-15P	10	484