




Refrigeration "HC"



Undercounter Freezers

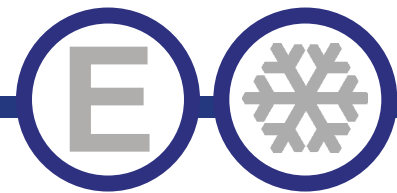

| Model | Size |
|---------|----------|
| UF27-HC | 27" Unit |
| UF48-HC | 48" Unit |
| UF61-HC | 61" Unit |
| UF72-HC | 72" Unit |



STANDARD FEATURES

- Solid state thermostat with digital display
- Stainless steel front & sides
- Add "-SI" to the model number for stainless steel interior.
Example: UF27-SI-HC
- Self closing doors remain open past 90°
- Field reversible door (UF27-HC)
- Environmentally friendly R290A
- EZ slide out condenser
- Whisper quiet
- Solid construction
- Full length integrated door handle
- Casters with two front brakes
- Cool air intake
- 2" clearance back and sides

*Not suitable for installation in a non-commercial or residential applications.


| Items | Description | Items | Description |
|--------------------|-----------------------------|----------------------|--|
| Front, top & sides | Stainless steel | Temperature control | Solid state thermostat/Digital display |
| Doors | Stainless steel / ABS liner | Approvals | ETL Listed |
| External back | Aluminum | Refrigerating system | Capillary tube |
| Cabinet interior | ABS | Refrigerant | R290A |
| Interior floor | Stainless steel | Temperature range | 7°F to -1°F |
| Insulation | Polyurethane (CFC free) | Evaporator | Powder coated aluminum/copper |
| Shelves | Heavy duty, PVC coating | Condensing unit | Rear mounted |

CONFORMS TO NSF/ANSI STD 7





DETAILS AND DIMENSIONS

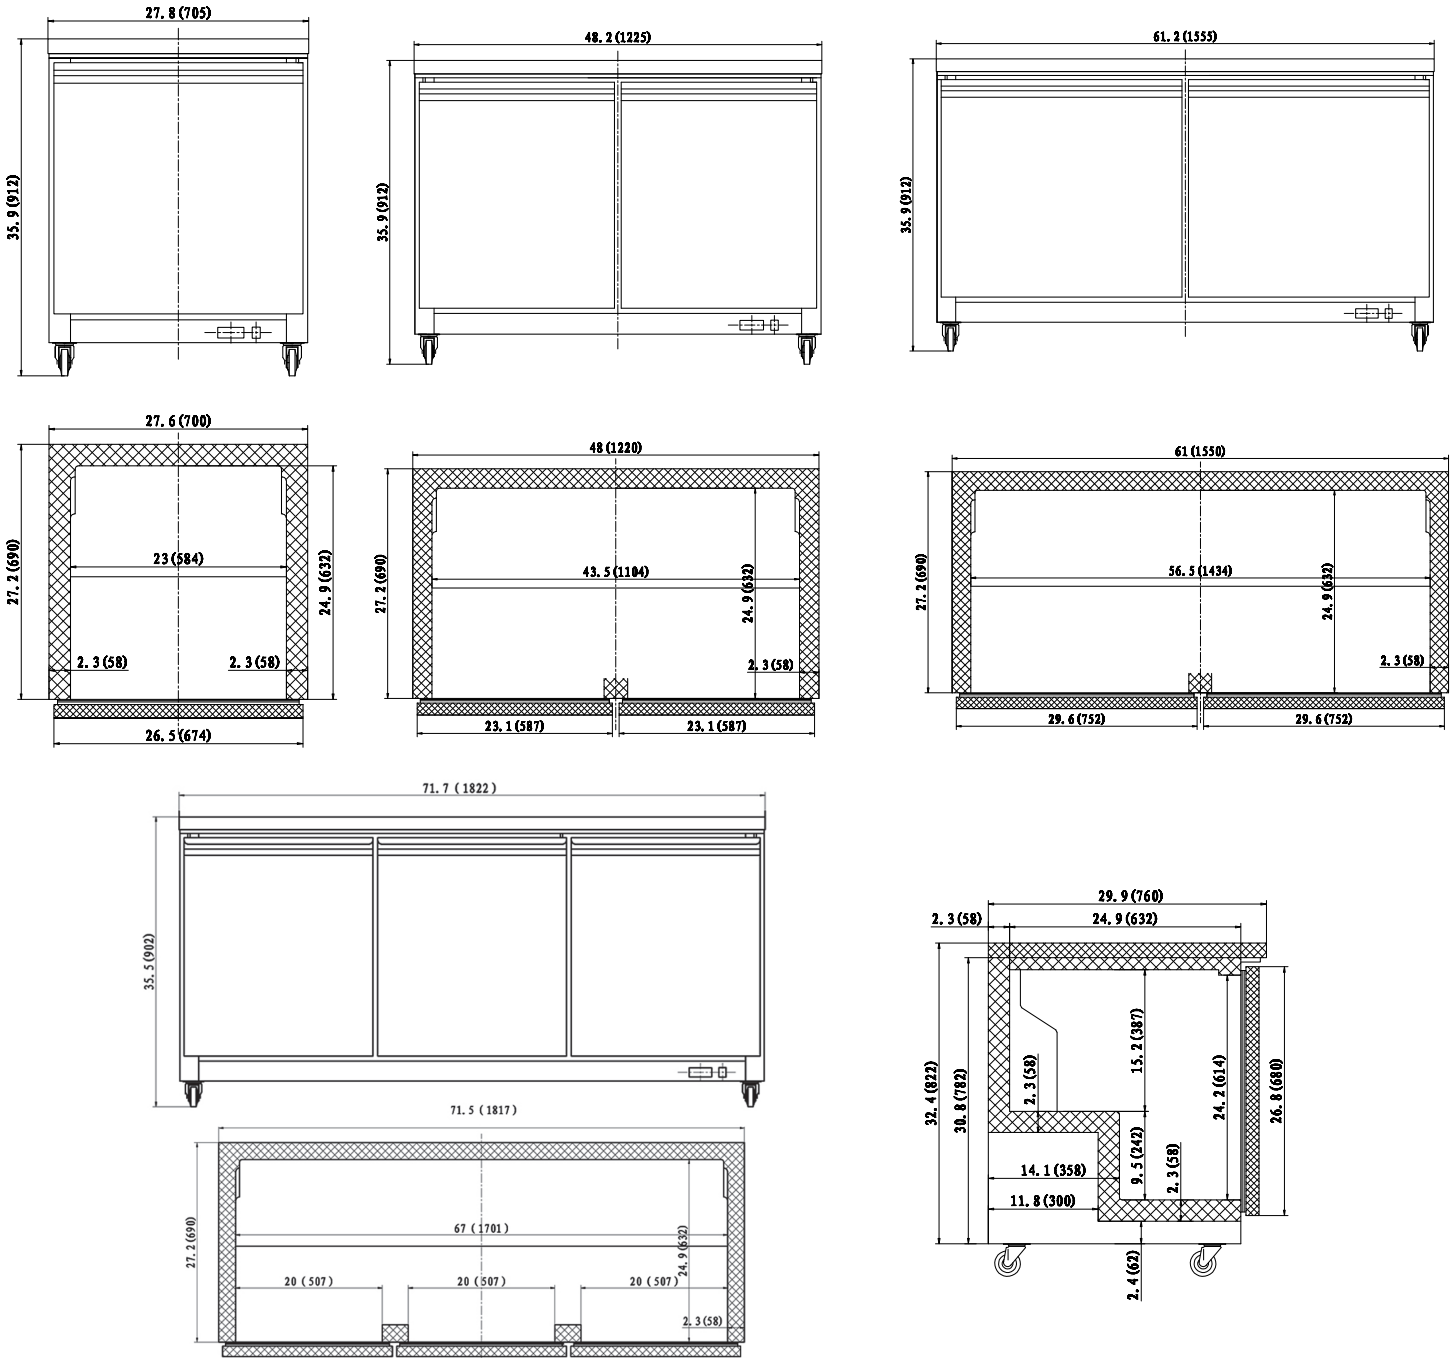

| Model | Doors | Shelves | Cabinet Dim (inches) | | | HP | Voltage | Amps | NEMA Plug | Cord Length | Crated Weight |
|---------|-------|---------|----------------------|------|------|-----|----------|------|-----------|-------------|---------------|
| | | | L | D | H | | | | | | |
| UF27-HC | 1 | 1 | 27.8 | 29.9 | 35.4 | 1/2 | 115/60/1 | 1.9 | 5-15P | 9.8 | 291 |
| UF48-HC | 2 | 2 | 48.2 | 29.9 | 35.4 | 1/2 | 115/60/1 | 2.4 | 5-15P | 9.8 | 340 |
| UF61-HC | 2 | 2 | 61.2 | 29.9 | 35.4 | 1/2 | 115/60/1 | 5.0 | 5-15P | 9.8 | 388 |
| UF72-HC | 3 | 3 | 71.7 | 29.9 | 35.4 | 5/8 | 115/60/1 | 6.0 | 5-15P | 9.8 | 399 |