




Refrigeration "HC"



Undercounter Refrigerators

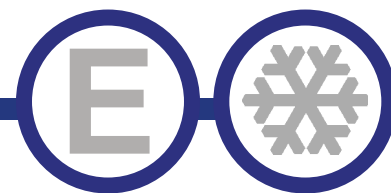

Model	Size
UR27-ES-HC	27" Unit
UR48-ES-HC	48" Unit
UR61-ES-HC	61" Unit
UR72-HC	72" Unit

STANDARD FEATURES

- Solid state thermostat with digital display
- Stainless steel front & sides
- Add "-SI" to the model number for stainless steel interior.
Example: UR27-ES-SI-HC
- Self closing doors remain open past 90°
- Environmentally friendly R600A
- EZ slide out condenser
- Whisper quiet
- Solid construction
- Full length integrated door handle
- Casters with two front brakes
- Cool air intake
- 2" clearance back and sides
- [UR27-ES-HC](#), [UR48-ES-HC](#), and [UR61-ES-HC](#) are Energy Star 5.0 Approved

***Not suitable for installation in a non-commercial or residential applications.**

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS liner	Approvals	ETL Listed
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	ABS	Refrigerant	R600A
Interior floor	Stainless steel	Temperature range	34°F to 38°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Rear mounted

CONFORMS TO NSF/ANSI STD 7

Customer Service (704) 900-2068 - www.entree.biz - greatfoods@entree.biz












Intertek

Intertek

REFRIGERATION



DETAILS AND DIMENSIONS

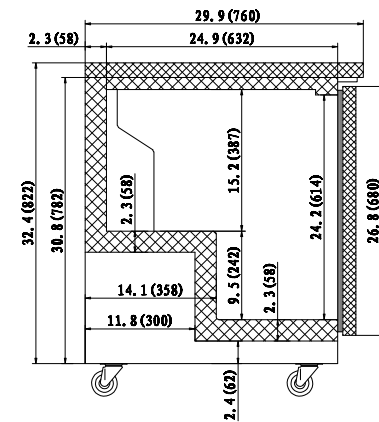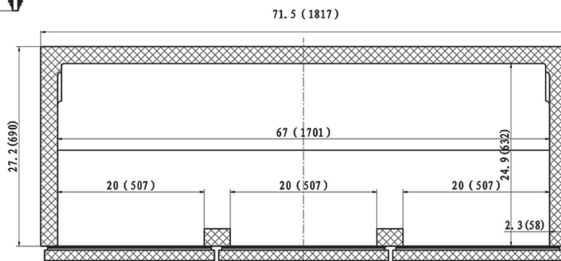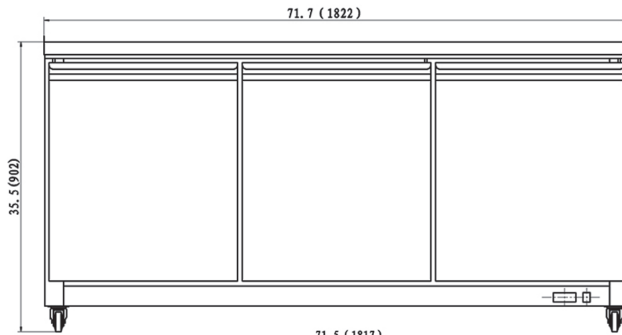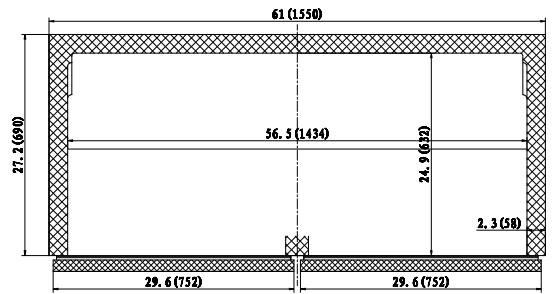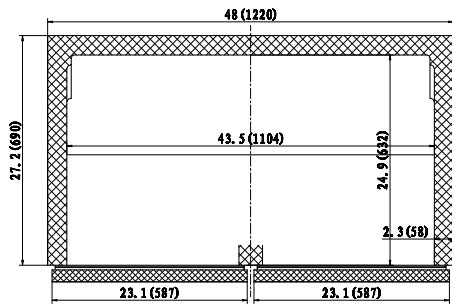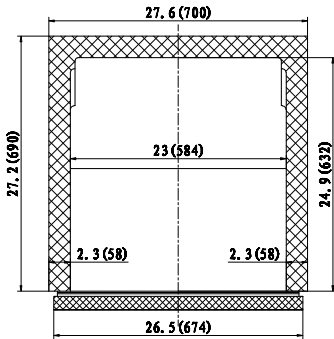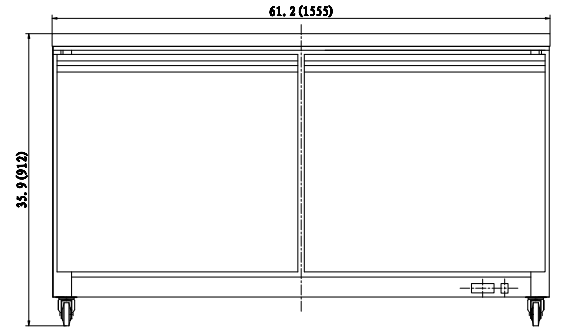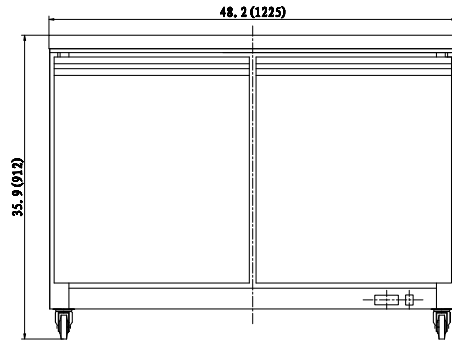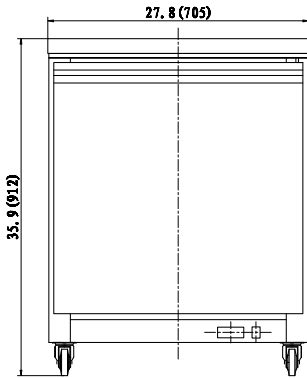

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
			L	D	H						
UR27-ES-HC	1	1	27.8	29.9	35.5	3/8	115/60/1	1.5	5-15P	9.8	243
UR48-ES-HC	2	2	48.2	29.9	35.5	3/8	115/60/1	3.0	5-15P	9.8	300
UR61-ES-HC	2	2	61.2	29.9	35.5	3/8	115/60/1	3.0	5-15P	9.8	330
UR72-HC	3	3	71.7	29.9	35.5	3/8	115/60/1	3.5	5-15P	9.8	380

ES - Energy Star