




Refrigeration "HC"



MEGA-TOP UNITS

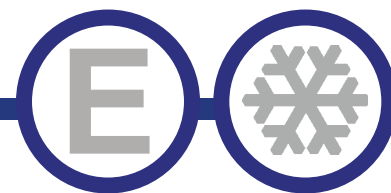

Model	Size
S29-MT-HC	29" Unit
S48-MT-HC	48" Unit
S61-MT-HC	61" Unit
S72-MT-HC	72" Unit

STANDARD FEATURES

- Solid state thermostat with digital display
- 1/6 size Lexan pans included 3 rows of 6th pans
- Full-length poly-vinyl cutting board included
- Stainless steel front, sides & top
- Self closing doors remain open past 90°
- Field reversible door (S29-MT-HC) (with additional parts)
- Environmentally friendly R290
- EZ slide out condenser
- Whisper quiet
- Solid construction
- Full length integrated door handle
- Casters with two front brakes
- Cool air intake
- Clearance 2" back and 2" both sides

*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, Sides & Top	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / Aluminum liner	Approvals	NSF-7, ETL
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Plastic	Refrigerant	R290
Interior floor	Stainless steel	Temperature range	34-38F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Rear mounted
Cutting board	Plastic (included)		


CONFORMS TO NSF/ANSI STD 7

REFRIGERATION PREP





DETAILS AND DIMENSIONS

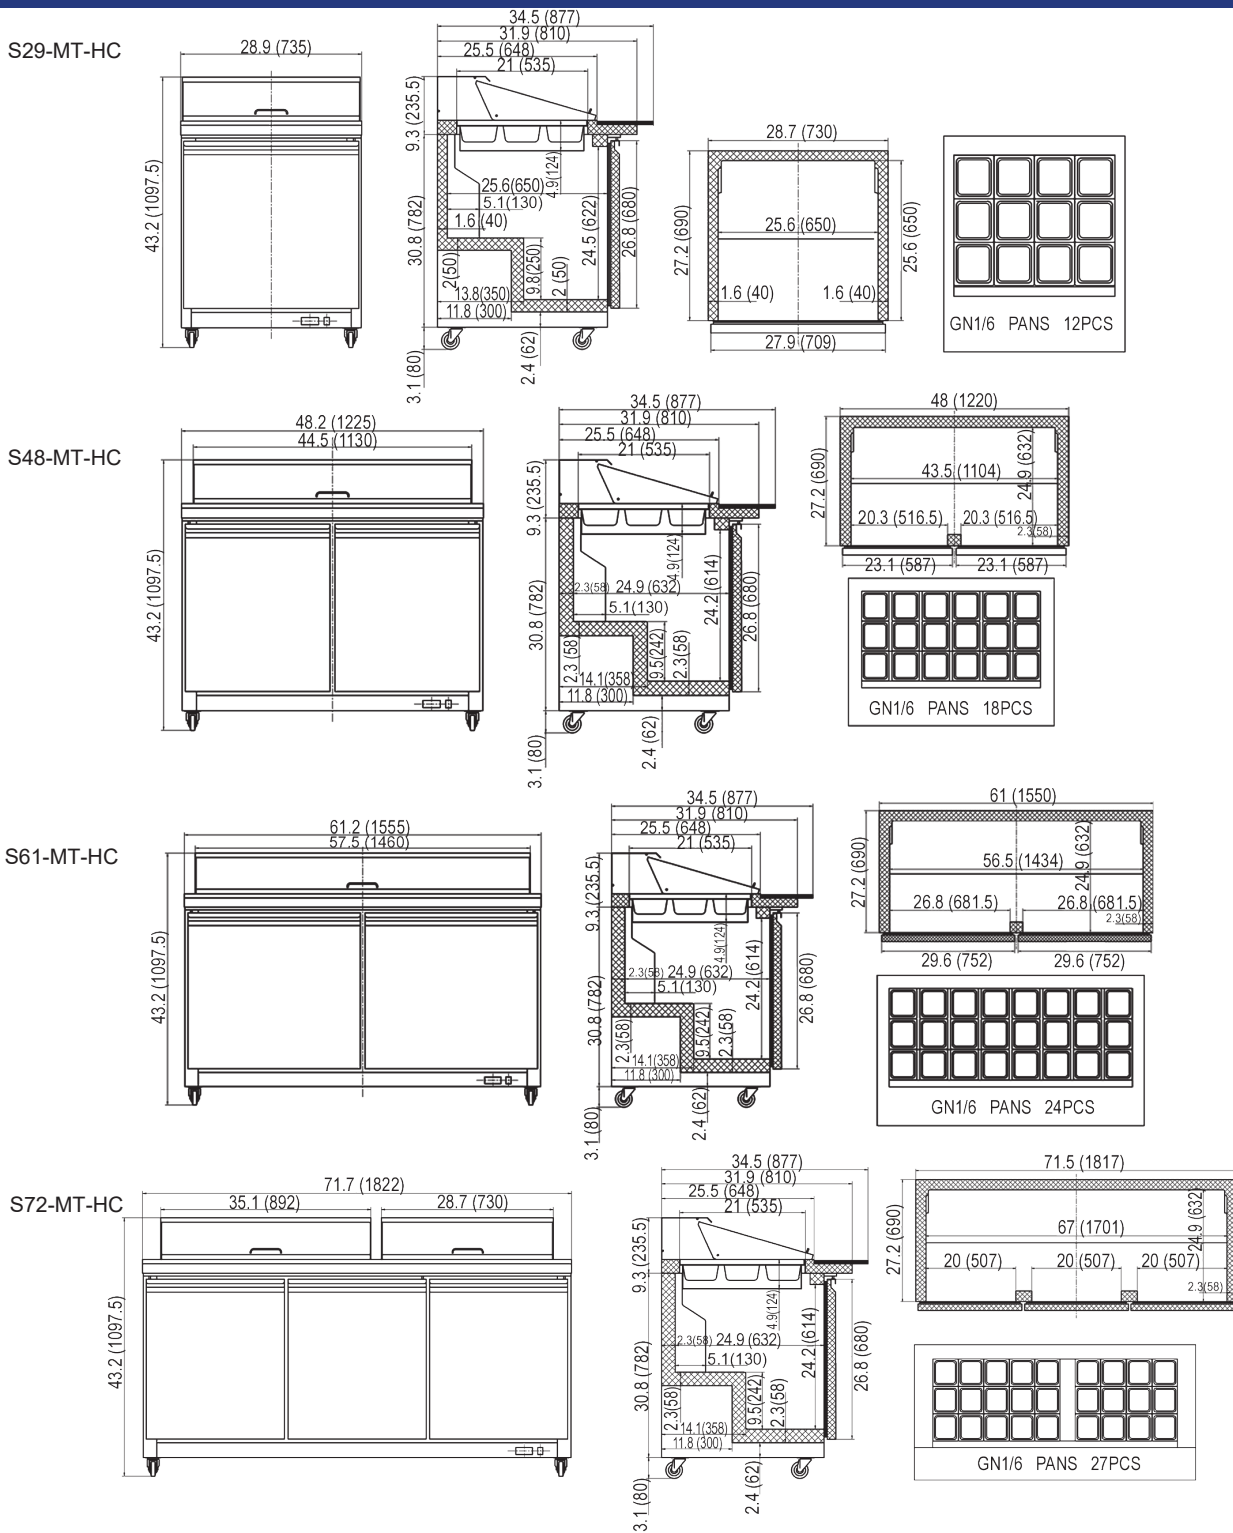

Model	Doors	Shelves	Pans	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
				L	D	H						
S29-MT-HC	1	1	12 (1/6)	28.9	34.5	43.2	1/3	115/60/1	3	5-15P	10	276
S48-MT-HC	2	2	18 (1/6)	48.2	34.5	43.2	1/2	115/60/1	4.3	5-15P	10	313
S61-MT-HC	2	2	24 (1/6)	61.2	34.5	43.2	1/2	115/60/1	4.3	5-15P	10	362
S72-MT-HC	3	6	27 (1/6)	71.7	34.5	43.2	1/2	115/60/1	4.3	5-15P	10	408