



# ELECTRIC CONVECTION OVEN

SEC01 W/Casters Shown



Model	Internal Dimensions		
	W	D	H
SEC01	29.0"	21.5"	20"

## STANDARD FEATURES

- ETL Safety & Sanitation Certified
- Top and front with stainless steel construction, back aluminum, sides powder coated silver.
- Long triangular leg for strength and durability with adjustable casters is standard (-C), optional stationary legs, (-L).
- The double pane glass doors have an interlock switch that automatically turns the fan and elements off when open
- Heavy duty F.I.R. Convection Fan Motor: 1/2 HP, two speed
- Accurate solid state oven thermostat with a range from 150°F - 500°F
- 60-minute continuous ring timer - manual shut off
- Temperature ready indicator light
- 5 Heavy Duty chrome plated oven racks supplied, with a 10 position rack guide with 1.5" spacing in between.
- Seamless enamel interior and corners for easy cleaning
- 1ph and 3ph can be convertible in the field
- Stacking kit available to double stacking, (Note: Inter-Connect Wiring not included.) Order Stacking Kit #SKES-C



HEAVY DUTY COOKING

**Warranty:** Solaris's exclusive 1 year parts and labor FUSS warranty takes effect from date of purchase.


This appliance is for commercial indoor use only. \*\*Not suitable for installation in a non-commercial or residential applications.

**Customer Service (704) 900-2068**  
**For Sales Info email: [solaris@entree.biz](mailto:solaris@entree.biz)**  
**Website: [www.entree.biz/solaris](http://www.entree.biz/solaris)**





# DETAILS AND DIMENSIONS

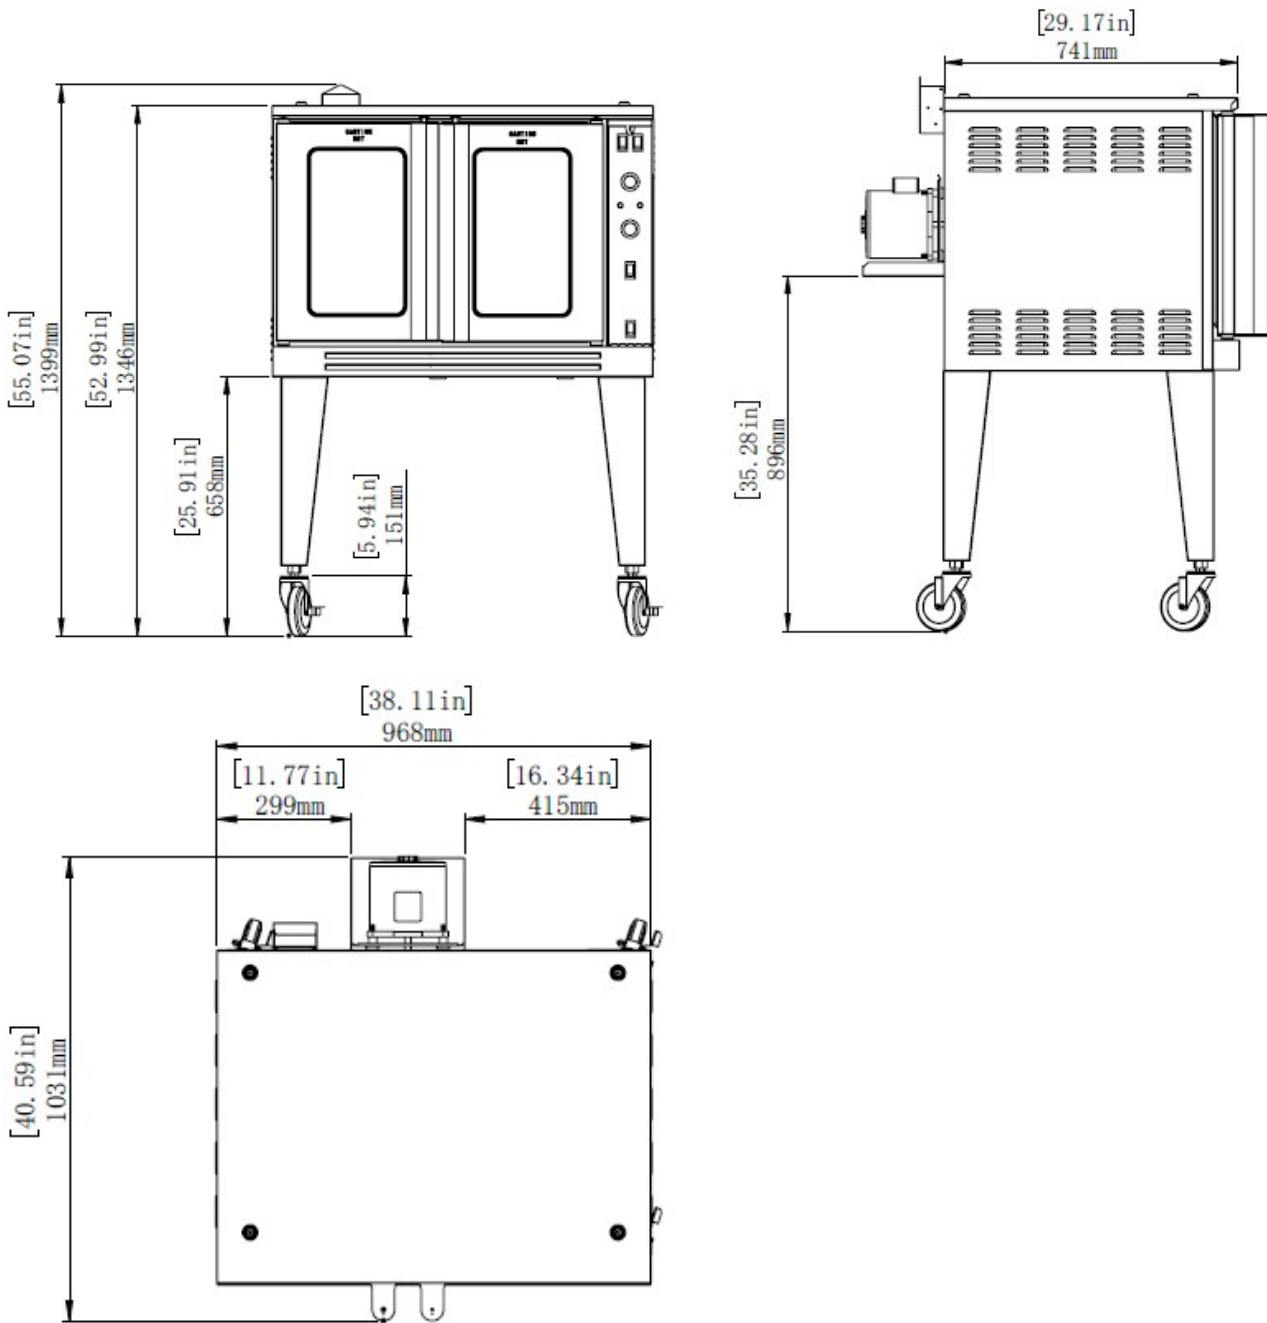

Note: This equipment must be installed by a licensed electrician, and must wire to local and national electrical code.

Model #	# of Shelves	kW	Voltage	Amps		Chamber Size			Product Dimensions			Shipping Dimensions			Net Weight (lbs.)	Gross Weight (lbs.)
				1Ø	3Ø	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height		
SEC01	5	9	208VAC	44	25	29.0"	21.5"	20.0"	38.11"	40.59"	55.07"	43.3"	46.45"	38.60"	395	491
SEC01	5	11	240VAC	46	27	29.0"	21.5"	20.0"	38.11"	40.59"	55.07"	43.3"	46.45"	38.60"	395	491