



2025 Product
CATALOG



TABLE OF CONTENTS

Reach-In Models

Reach-In Models – Bottom Mount Compressor.....	03
Reach-In Models – Top Mount Compressor.....	04
Half-Door Reach-In Models – Refrigerator.....	05
Half-Door Reach-In Models – Freezer.....	06
Reach-In Small Volume Models.....	07
Glass Door Reach-In Models.....	08
Economy Solid Door Reach-In Models.....	09
Economy Glass Door Reach-In Refrigerator Models.....	10

Merchandisers

Single Glass Door Merchandisers – Low Volume.....	11
Single Glass Door Merchandiser – Standard Size.....	12
Double Glass Swing & Slide Door Merchandiser.....	13

Sandwich Prep Tables

Sandwich Prep Units – Standard Top (Stainless Interior).....	14
Sandwich Prep Units – Standard Top (Standard Interior).....	15
Sandwich Prep Units – Mega Top (Stainless Interior).....	16
Sandwich Prep Units – Mega Top (Standard Interior).....	17
High Shelf Options for Prep, Pizza Prep & Worktops.....	18

Undercounter Models

Under Counter Refrigerators.....	19
Under Counter Freezers.....	20
Low Height Under Counter Refrigerator.....	21
Low Height Under Counter Freezer.....	22
Low Height Under Counter Refrigerator – Stainless Interior....	23
Low Height Under Counter Freezer – Stainless Interior.....	24

Worktop Models

Work Top Refrigerators.....	25
Work Top Freezers.....	26

Chef Base Models

36" Chef Base Model.....	27
48" Chef Base Model.....	28
60" Chef Base Model.....	29
72" Chef Base Model.....	30

Pizza Prep Models

Pizza Prep Models.....	31
------------------------	----

Back Bar Bottle Coolers

Solid Door Back Bar Coolers.....	32
Glass Door Back Bar Coolers.....	33

Beverage Dispensers

Beer Dispensers – Models BCBD1, BCBD2-1, BCBD2-2.....	34
Beer Dispensers – Models BCBD3-1, BCBD3-2, BCBD4-2.....	35

Slide Top Bottle Coolers & Glass Frosters

Slide Top Bottle Coolers.....	36
Slide Top Glass Frosters.....	37

Topping Rails

Entrée Topping Rail – All Models.....	38
---------------------------------------	----



REFRIGERATION HC

Reach-In Refrigeration Bottom Mount Series

Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	L (in)	D (in)	H (in)	Voltage	Amps	NEMAPlug
CR1-ES-HC	1	3	27	33.7	82.7	115/60/1	3	5-15P
CR2-ES-HC	2	6	54	33.7	82.7	115/60/1	4.5	5-15P
CR3-HC	3	9	81	33.7	82.7	115/60/1	7	5-15P
CF1-HC	1	3	27	33.7	82.7	115/60/1	8	5-15P
CF2-HC	2	6	54	33.7	82.7	115/60/1	8	5-15P
CF3-DV-HC	3	9	81	33.7	82.7	115/240/1	9	L14-20P

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range:
 - CR: 34-38°F
 - CF: -1° to -7°F
- Environmentally friendly R290 refrigerant
- High-efficiency polyurethane insulation (CFC-free)
- Capillary tube refrigerating system
- Bottom-mounted condensing unit
- Slide-out condenser for easy service access
- Whisper-quiet operation

Clearance & Efficiency

- Zero-clearance sides
- 1" rear clearance
- ETL Listed
- Slide-out condenser for easy service access
- Whisper-quiet operation


Construction

- 430 stainless steel front, top, and sides
- Stainless steel doors with ABS liner
- Powder-coated aluminum cabinet interior
- Stainless steel interior floor
- Aluminum external back
- LED interior lighting
- Full-length integrated door handles
- Non-twist solid mullions (2 & 3 door models)
- Self-closing doors that remain open past 90°
- 3 heavy-duty PVC-coated shelves
- Heavy-duty baked epoxy racks
- Solid construction
- Holds sheet pans front to back

Optional Feature

- SI - Add suffix "SI" for 430 stainless steel interior with 304 stainless steel floor
Example: CR1-ES-SI-HC

DIMENSIONS

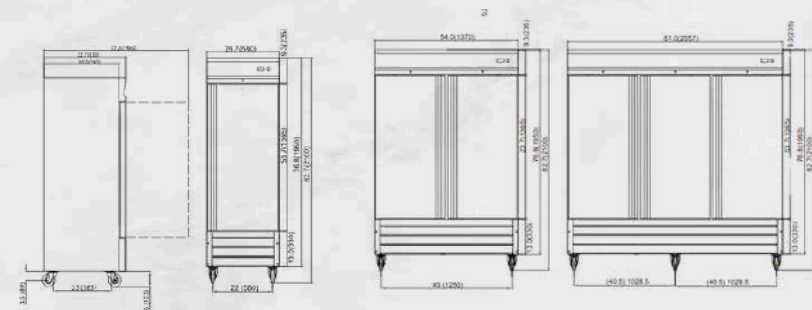

REFRIGERATION HC

Reach-In Refrigeration Top Mount Series

Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	W(in)	D(in)	H(in)	HP	Amp	NEMAPlug	NEMAPlug
CR1-TSHS-HC	1	26.8	32.7	82.3	1/5	3	5-15P	5-15P
CR2-TSHS-HC	2	53.9	32.7	82.3	1/4	4.5	5-15P	5-15P
CR3-TSH-HC	3	81	32.7	82.3	1/2	7	5-15P	5-15P
CF1-TSH-HC	1	26.8	32.7	82.3	1/2	8	5-15P	5-15P
CF2-TSH-HC	2	53.9	32.7	82.3	1	9	5-15P	5-15P
CF3-TSH-DV-HC	3	81	32.7	82.3	1-1/4	9	L14-20	L14-20P

STANDARD FEATURES

Performance

- Electronic solid state thermostat with digital LED temperature display
- Temperature range:
 - CR: 34°F to 38°F
 - CF: -1°F to -11°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Top-mounted condensing unit
- Larger fan motors and blades for efficient airflow and fast recovery
- High-efficiency polyurethane insulation
- Condensate heating element integrated into pan for evaporation
- Heating element concealed in door frame to eliminate condensation (Freezers only)


Clearance & Efficiency

- Zero-clearance sides
- 2" rear clearance
- ETL Listed

Construction

- 430 stainless steel front, top, and sides
- 202 stainless steel door
- 430 stainless steel external back
- 430 stainless steel cabinet interior
- 304 stainless steel interior floor
- LED interior lighting
- Integrated door handle
- Self-closing doors that remain open past 90°
- Magnetic gasket (tool-free replacement)
- Door locks included
- Adjustable heavy-duty epoxy-coated wire shelves (3 or 4 levels)
- Solid construction
- Holds sheet pans front to back

DIMENSIONS

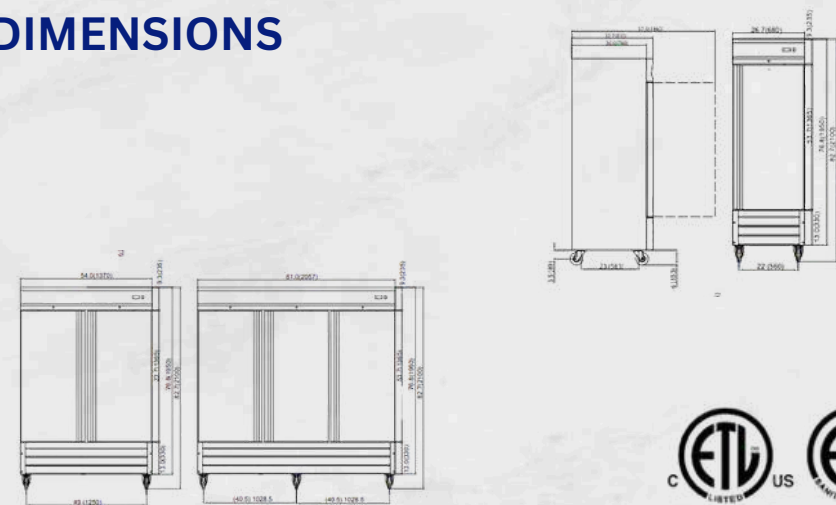

REFRIGERATION HC



Half-Door Reach-In Models Refrigerator



Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMAPlug
CR1-2HD-HC	2	3	26.8	32.7	82.3	1/8	115/60/1	3	5-15P
CR2-4HD-HC	4	6	53.9	32.7	82.3	1/2	115/60/1	4.5	5-15P
CR3-6HD-HC	6	9	81	32.7	82.3	3/4	115/60/1	7.5	5-15P

DIMENSIONS

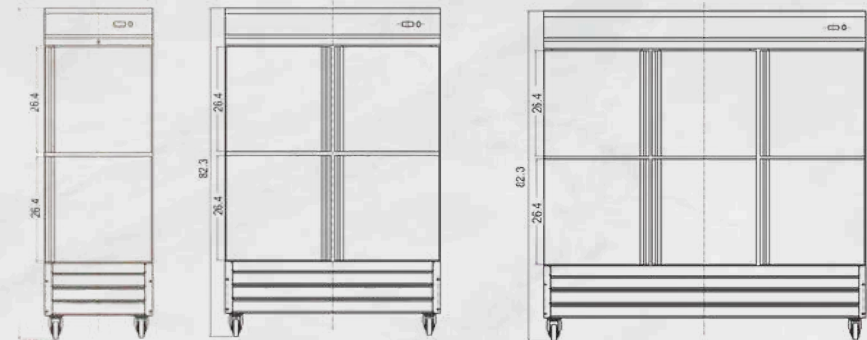

STANDARD FEATURES

Performance

- Electronic solid state thermostat with digital LED display
- Temperature range: 34°F – 38°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Bottom-mounted condensing unit
- Larger fan motors and blades for efficient airflow and fast recovery
- Condensate heating element integrated into pan for evaporation
- Easy slide-out compressor housing for service access
- Bottom mount design raises interior floor for easier product loading and unloading

Clearance & Efficiency

- ETL Listed
- NSF-7 certified for open food storage
- ENERGY STAR® certified models (CR1-2HD, CR2-4HD)

Construction

- Stainless steel exterior top and sides
- Stainless steel door
- 430 stainless steel external back
- Aluminum interior cabinet (white)
- 304 stainless steel interior floor
- LED interior lighting
- Self-closing doors that remain open past 90°
- Magnetic gasket (tool-free replacement)
- Door lock included
- Adjustable heavy-duty PVC-coated wire shelves (3 or 4 levels)
- Four casters (two front locking)



REFRIGERATION HC



Half-Door Reach-In Models Freezer


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Shelves Sizes (in)	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
CF1-2HD-HC	2	3	24.3/21.6	26.8	32.7	82.3	1/2	115/60/1	8	5-15P
CF2-4HD-HC	4	6	24.3/21.6	53.9	32.7	82.3	1	115/60/1	9	5-15P
CF3-6HD-DV-HC	6	9	24.3/23.6	81	32.7	82.3	1-1/4	115/240V	9	L14-20P

DIMENSIONS

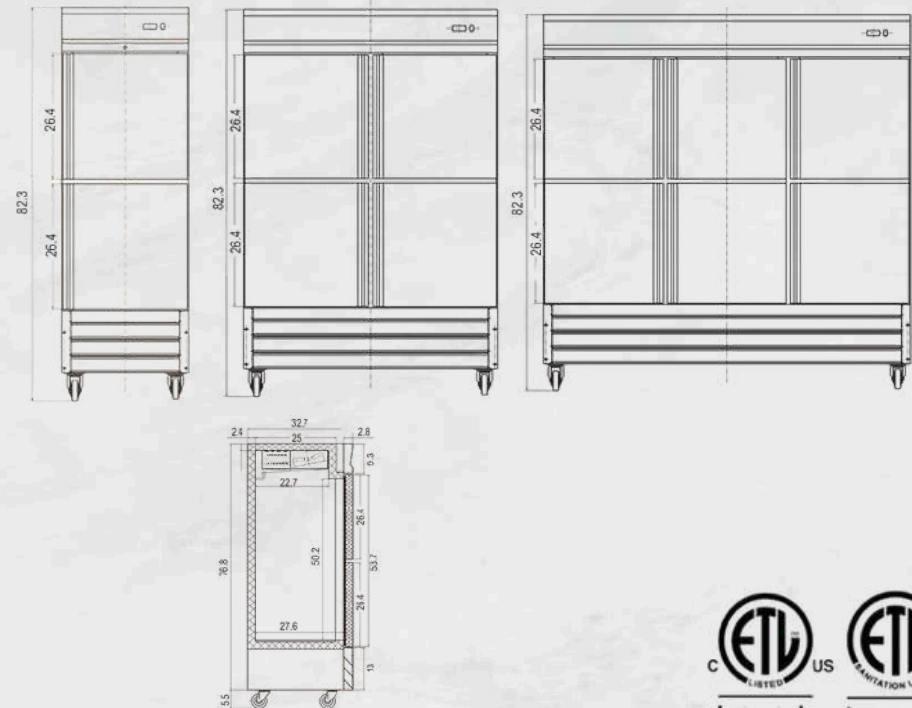

STANDARD FEATURES

Performance

- Electronic solid state thermostat with digital LED display
- Temperature range: -11°F – 1°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Bottom-mounted condensing unit
- Larger fan motors and blades for efficient airflow and fast recovery
- Condensate heating element integrated into pan for evaporation
- Easy slide-out compressor housing for service access
- Bottom mount design raises interior floor for easier product loading and unloading

Clearance & Efficiency

- ETL Listed
- NSF-7 certified for open food storage

Construction

- Stainless steel exterior top and sides
- Stainless steel door
- Stainless steel external back
- Aluminum interior cabinet (white)
- 304 stainless steel interior floor
- LED interior lighting
- Self-closing doors that remain open past 90°
- Magnetic gasket (tool-free replacement)
- Door lock included
- Adjustable heavy-duty PVC-coated wire shelves (3 or 4 levels)
- Four casters (two front locking)

REFRIGERATION HC



Reach-In Small Volume Models



Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/Ph	Amp	NEMA Plug
CRI-19-HC	1	3	26.8	25.6	82.3	1/5	115/60/1	3	5-15P
CFI-19-HC	1	3	26.8	25.6	82.3	1/2	115/60/1	5	5-15P
CR2-35-HC	2	6	39.5	32.7	82.3	1/4	115/60/1	4.5	5-15P

DIMENSIONS

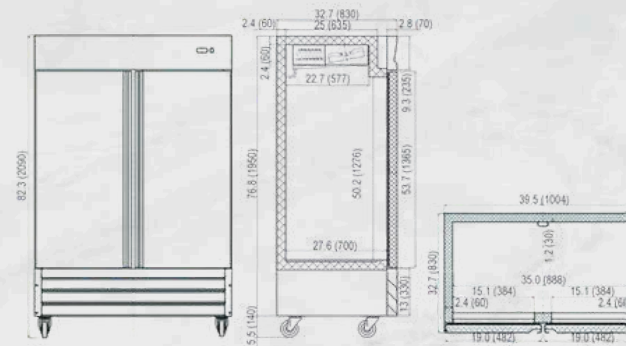

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range:
 - CR: 34°F – 38°F
 - CF: -11°F – -1°F
- CFC-free refrigerant and foam
- Environmentally friendly HC R290
- Capillary tube refrigerating system
- Bottom-mounted condensing unit
- High-efficiency polyurethane insulation
- EZ slide-out condenser
- Whisper-quiet operation

Clearance & Efficiency

- Zero-clearance sides and 2" back
- ETL Listed

Construction

- Stainless steel front and sides
- 430 stainless steel front, top, and sides
- 430 stainless steel door
- 430 stainless steel external back
- Powder-coated aluminum cabinet interior
- 304 stainless steel interior floor
- Stainless steel door handle
- Field-reversible 1-door units
- Self-closing doors remain open past 90°
- Non-twist solid mullions on 2 & 3 door units
- Heavy-duty PVC-coated shelves (3 or 4 layers)
- Solid construction



REFRIGERATION HC



Glass Door Reach-In Models


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
CR1-27-G-HC	1	4	26.8	31.9	82.7	1/5	115/60/1	3	5-15P
CR2-54-G-HC	2	8	53.9	31.9	82.7	1/4	115/60/1	4.5	5-15P

DIMENSIONS

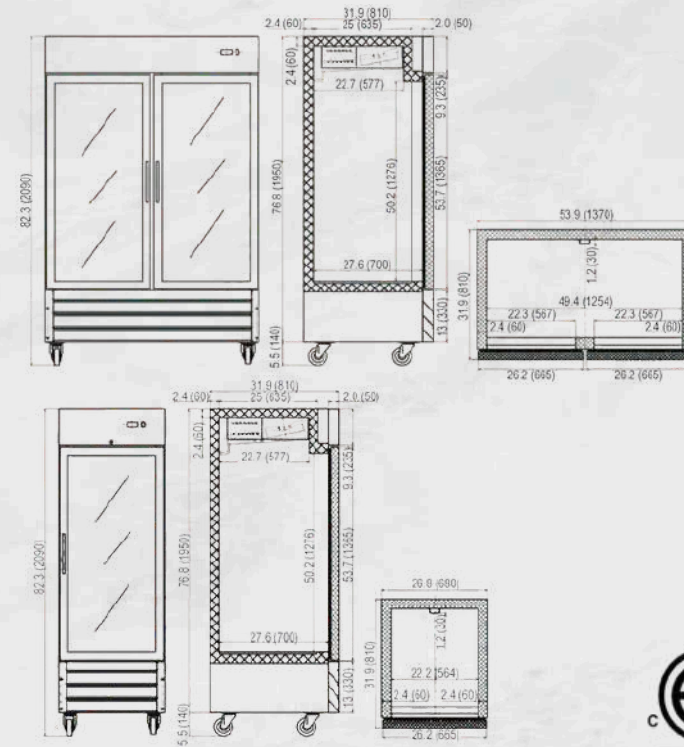

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Bottom-mounted condensing unit
- Heating element concealed in door frame to eliminate condensation
- High-efficiency polyurethane insulation
- EZ slide-out condenser
- Whisper-quiet operation

Clearance & Efficiency

- Zero-clearance sides
- 2" minimum rear clearance
- ETL Listed

Construction

- 430 stainless steel front, top, and sides
- 430 stainless steel frame glass door
- 430 stainless steel external back
- Powder-coated aluminum cabinet interior
- Powder-coated aluminum interior floor
- Integrated door handle
- Self-closing doors that remain open past 90°
- Non-twist solid mullions (2 & 3 door models)
- Heavy-duty PVC-coated shelves (3 or 4 levels)
- Solid construction
- Holds sheet pans front to back

REFRIGERATION HC




Economy Solid Door Reach-In Models
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMAPlug
CRI-EC-HC	1	3	30.59	28.74	78	1/4	115/60/1	3	5-15P
CFI-EC-HC	1	3	30.59	28.74	78	3/4	115/60/1	7	5-15P

DIMENSIONS

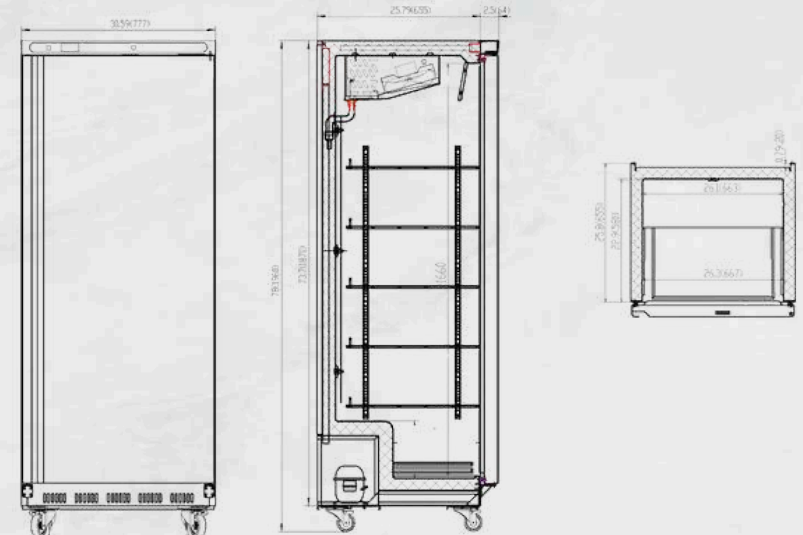

STANDARD FEATURES

Performance

- Electronic thermostat with digital LED display
- Temperature range:
 - Refrigerator: 34°F – 38°F
 - Freezer: -7°F – -3°F
- R290 refrigerant (CFC-free)
- Capillary tube refrigerating system
- Ventilated cooling system
- Bottom-mounted condensing unit
- Efficient and reliable refrigeration

Construction

- White aluminum exterior (top, sides, back)
- Solid white aluminum door
- White aluminum cabinet interior
- White aluminum interior floor
- Polyurethane insulation (CFC-free)
- Adjustable heavy-duty PVC-coated wire shelves (3 or 4 levels)
- Door lock included
- Four casters (two front locking brakes)
- No interior lighting

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC



Economy Glass Door Reach-In Refrigerator Model


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W (in)	D (in)	H (in)	HP	Voltage/Hz/ph	Amp
CR1-EC-GHC	1	3	30.59	28.29	78	1/4	115/60/1	3

DIMENSIONS

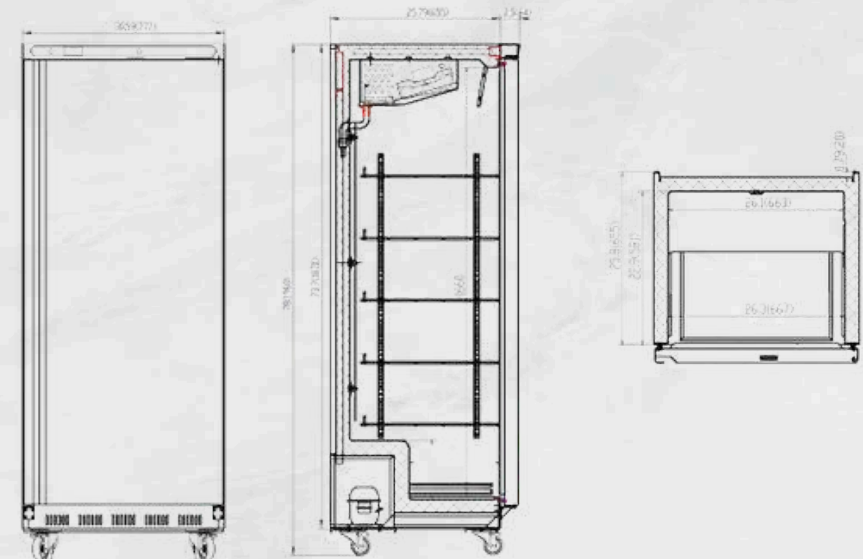

STANDARD FEATURES

Performance

- Electronic thermostat with digital LED display
- Temperature range: 34–38°F
- R290 refrigerant (CFC-free)
- Capillary tube refrigerating system
- Ventilated cooling system
- Bottom-mounted condensing unit
- Efficient and reliable refrigeration

Construction

- White aluminum exterior (top, sides, back)
- Glass door
- White aluminum cabinet interior
- White aluminum interior floor
- Polyurethane insulation (CFC-free)
- Adjustable heavy-duty PVC-coated wire shelves (3 or 4 levels)
- Door lock included
- Four casters (two front locking brakes)
- No interior lighting

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC





Single Glass Door Merchandisers Low Volume
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/p	Amp	NEMA Plug
EGD-1DR-12-HC	1	3	25	26	61.8	1/5	115/60/1	3	5-15P
EGD-1DR-16-HC	1	3	25	26	74.8	1/5	115/60/1	3	5-15P
EGD-1DF-12-HC	1	3	25	26	61.8	1/2	115/60/1	5	5-15P
EGD-1DF-16-HC	1	3	25	26	74.8	1/2	115/60/1	5	5-15P

DIMENSIONS

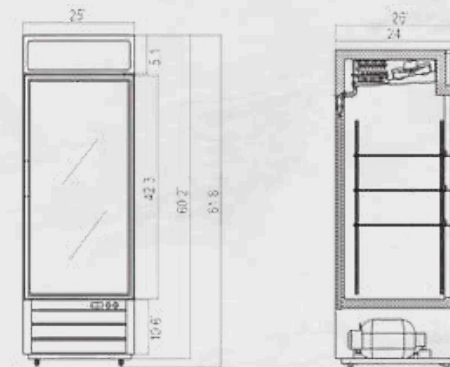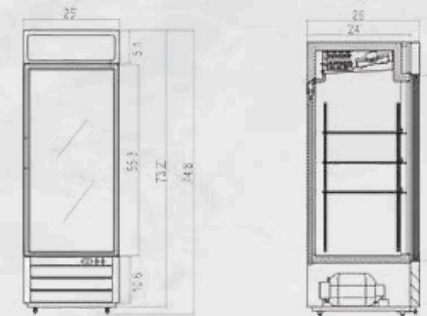

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range:
 - CR: 34°F – 38°F
 - CF: -6°F – 10°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Energy Star efficient refrigeration system
- Bottom-mounted, slide-out condenser
- High-density polyurethane insulation
- Whisper-quiet, high-efficiency compressor

Construction

- Black coated steel exterior (top, sides, back)
- Triple-pane tempered glass doors with heat-reflecting film
- White powder-coated steel interior
- 304 stainless steel interior floor
- Very bright LED lighting
- Adjustable heavy-duty PVC-coated shelves (3 or 4 levels)
- Removable door gaskets
- Door locks included
- Economically designed door handle

Clearance & Efficiency

- ETL Listed
- ETL Sanitary



REFRIGERATION HC

Single Glass Door Merchandiser, Standard Size
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Shelf Size (in)	W (in)	D (in)	H (in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
EGD-1DR-23-HC	1	4	28.6x24.3	26.8	33.5	80	1/5	115/60/1	3	5-15P
EGD-1DR-26-HC	1	4	28.6x26.14	28.3	33.9	80	1/5	115/60/1	3	5-15P
EGD-1DF-23-HC	1	4	28.6x24.3	26.8	33.5	80	1/2	115/60/1	8	5-15P
EGD-1DF-26-HC	1	4	28.3x26.14	28.3	33.9	80	1/2	115/60/1	8	5-15P

DIMENSIONS



STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range:
 - Refrigerator: 33°F - 41°F
 - Freezer: -4°F - 10°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Energy Star efficient refrigeration system (Refrigerator models only)
- Bottom-mounted, slide-out condenser
- High-density polyurethane insulation
- Whisper-quiet, high-efficiency compressor

Clearance & Efficiency

- ETL Listed

Construction

- Black coated steel exterior (top and sides)
- Aluminum external back
- Triple-pane tempered glass doors with heat-reflecting film
- White aluminum interior cabinet
- 304 stainless steel interior floor
- LED interior lighting
- Adjustable heavy-duty PVC-coated shelves (3 or 4 levels)
- Removable door gaskets
- Door locks included
- Economically designed door handle



REFRIGERATION HC




Double Glass Swing & Slide Door Merchandiser
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Shelf Size (in)	W (in)	D (in)	H (in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
EGD-2DR-36-HC	2	8	16.41x24.33	39.5	32	79.5	1/5	115/60/1	3	5-15P
EGD-2DR-47-HC	2	8	24.09x24.13	54	30.7	80	1/4	115/60/1	4.5	5-15P
EGD-2DR-48-HC	2	8	23.15x26.14	54	33.5	80	1/4	115/60/1	4.5	5-15P
EGD-2DF-36-HC	2	8	16.41x24.33	39.5	32	79.5	1/2	115/60/1	8	5-15P

DIMENSIONS

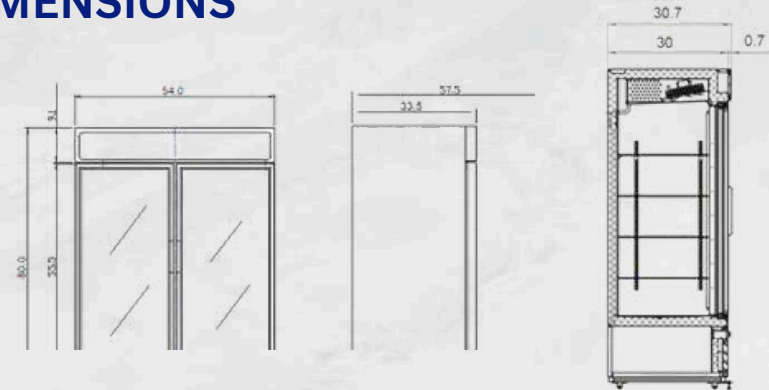

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range:
 - Refrigerator: 34°F – 38°F
 - Freezer: -4°F – 10°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Energy Star efficient refrigeration system (Refrigerator model EGD-2DR-48-HC only)
- Bottom-mounted, slide-out condenser
- High-density polyurethane insulation
- Whisper-quiet, high-efficiency compressor

Clearance & Efficiency

- ETL Listed

Construction

- Black coated steel exterior (top and sides)
- Aluminum external back
- Triple-pane tempered glass doors with heat-reflecting film
- White aluminum interior cabinet
- 304 stainless steel interior floor
- LED interior lighting
- Adjustable heavy-duty PVC-coated shelves (3 or 4 levels)
- Removable door gaskets
- Door locks included
- Economically designed door handle



REFRIGERATION HC




Sandwich Prep Units Standard Top - Stainless Interior
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Pans	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
S29-SHC	1	1	8(1/6)	28.9	29.9	43.2	1/3	115/60/1	3	5-15P
S48-SHC	2	2	12(1/6)	48.2	29.9	43.2	1/2	115/60/1	4.3	5-15P
S61-SHC	2	2	16(1/6)	61.2	29.9	43.2	1/2	115/60/1	4.3	5-15P
S72-SHC	3	6	18(1/6)	71.7	29.9	43.2	1/2	115/60/1	4.3	5-15P

DIMENSIONS

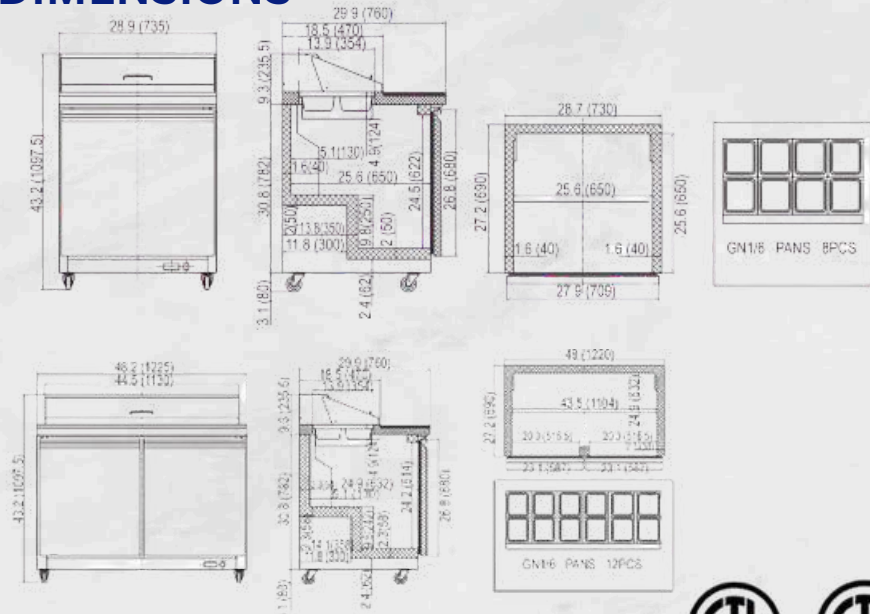

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34–38°F
- R290 refrigerant (environmentally friendly)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake system
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- Stainless steel doors (interior and exterior)
- Stainless steel cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- 1/6 size Lexan pans included
- Full-length vinyl cutting board included
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" side clearance
- 2" rear clearance
- ETL Listed



REFRIGERATION HC




Sandwich Prep Units Standard Top - Standard Interior
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Pans	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
S29-HC	1	1	8(1/6)	289	29.9	43.3	1/3	115/60/1	3	5-15P
S48-HC	2	2	12(1/6)	482	29.9	43.3	1/2	115/60/1	4.3	5-15P
S61-HC	2	2	16(1/6)	612	29.9	43.3	1/2	115/60/1	4.3	5-15P
S72-HC	3	6	18(1/6)	717	29.9	43.2	1/2	115/60/1	4.3	5-15P

DIMENSIONS

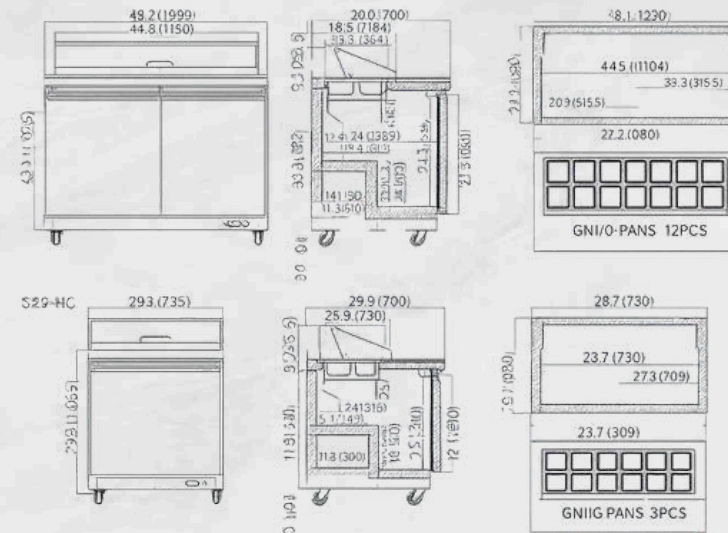

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34–38°F
- R290 refrigerant (environmentally friendly)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- 1/6 size Lexan pans included
- Full-length vinyl cutting board included
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Reversible door on S29-HC (with additional parts)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" side clearance
- 2" rear clearance
- ETL Listed



REFRIGERATION HC




Sandwich Prep Units Mega Top - Stainless Interior
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Pans	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
S29-MT-SHC	1	1	12(1/6)	28.9	31.9	43.2	1/3	115/60/1	3	5-15P
S48-MT-SHC	2	2	18(1/6)	48.2	31.9	43.2	1/2	115/60/1	4.3	5-15P
S61-MT-SHC	2	2	24(1/6)	61.2	31.9	43.2	1/2	115/60/1	4.3	5-15P
S72-MT-SHC	3	6	27(1/6)	71.7	31.9	43.2	1/2	115/60/1	4.3	5-15P

DIMENSIONS

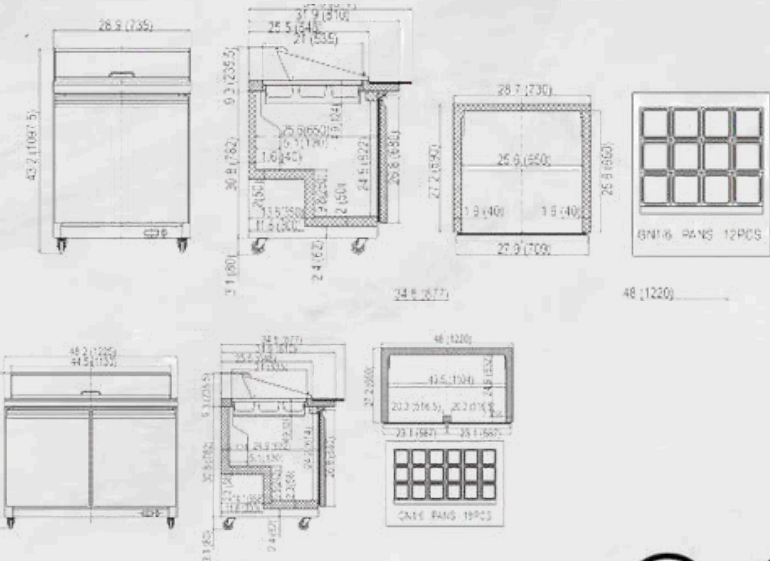

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34–38°F
- R290 refrigerant (environmentally friendly)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, sides, and top
- Stainless steel cabinet interior
- Stainless steel interior floor
- Stainless steel doors (interior and exterior)
- Aluminum external back
- Polyurethane insulation (CFC-free)
- 1/6 size Lexan pans included (3 rows of sixth pans)
- Full-length plastic cutting board included
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Field-reversible door (S29-MT-HC)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" side clearance
- 2" rear clearance
- NSF-7 certified
- ETL Listed



REFRIGERATION HC



Sandwich Prep Units Mega Top - Standard Interior


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Pans	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
S29-MT-HC	1	1	12(1/6)	289	34.5	432	1/3	115/60/1	3	5-15P
S48-MT-HC	2	2	18(1/6)	482	34.5	432	1/2	115/60/1	4.3	5-15P
S61-MT-HC	2	2	24(1/6)	612	34.5	432	1/2	115/60/1	4.3	5-15P
S72-MT-HC	3	6	27(1/6)	717	34.5	432	1/2	115/60/1	4.3	5-15P

DIMENSIONS

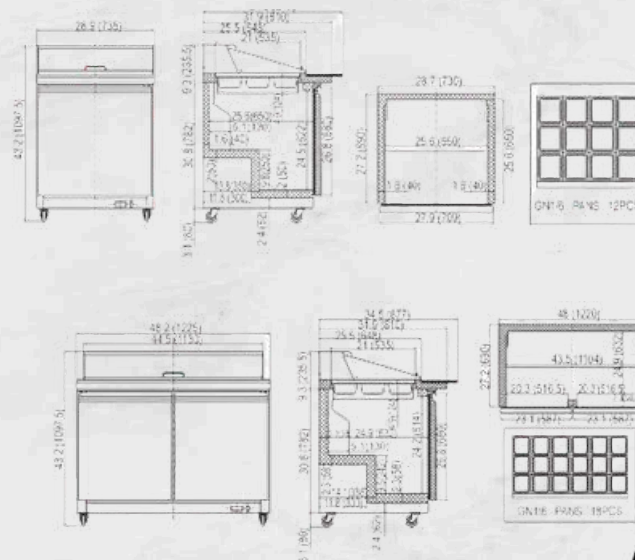

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34–38°F
- R290 refrigerant (environmentally friendly)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, sides, and top
- Stainless steel doors with aluminum liner
- Plastic cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- 1/6 size Lexan pans included (3 rows of six pans)
- Full-length plastic cutting board included
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Field-reversible door (S29-MT-HC) with additional parts
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" side clearance
- 2" rear clearance
- NSF-7 certified
- ETL Listed



REFRIGERATION HC

Now available, Add on **SINGLE & DOUBLE DECK HIGH SHELVES!**
Engineered for durability. Designed for Performance.



COUNTER TOP SHELVING SINGLE DECK (For all under counter and prep & pizza models)

MODEL NO.	Entree #	Material	Width(mm)	Width (in)	Depth(mm)	Depth (in)	Height(mm)	Height (in)
S48-HC	ES48-2TS	SS304	1264	49.76"	460	18.11"	750	29.53"
S60-HC	ES60-2TS	SS304	1610	63.39"	460	18.11"	750	29.53"
S72-HC	ES72-2TS	SS304	1897	74.69"	460	18.11"	750	29.53"
S48MT-HC	ES48MT-2TS	SS304	1264	49.76"	460	18.11"	750	29.53"
S60MT-HC	ES60MT-2TS	SS304	1594	62.76"	460	18.11"	750	29.53"
S72MT-HC	ES72MT-2TS	SS304	1862	73.30"	460	18.11"	750	29.53"
UR27-HC / UF27-HC	EUC27-2TS	SS304	744	29.29"	460	18.11"	750	29.53"
UR48-HC / UF48-HC	EUC48-2TS	SS304	1264	49.76"	460	18.11"	750	29.53"
UR60-HC / UF60-HC	EUC60-2TS	SS304	1594	62.76"	460	18.11"	750	29.53"
UR72-HC / UF72-HC	EUC72-2TS	SS304	1862	73.30"	460	18.11"	750	29.53"
P47-HC	EP44-2TS	SS304	1243	48.94"	482	18.98"	750	29.53"
P40-HC	EP70-2TS	SS304	1838	72.36"	482	18.98"	750	29.53"
P94-HC	EP93-2TS	SS304	2433	95.79"	482	18.98"	750	29.53"

MODEL NO.	Entree #	Material	Width(mm)	Width (in)	Depth(mm)	Depth (in)	Height(mm)	Height (in)
S48-HC	ES48-1TS	SS304	1264	49.76"	460	18.11"	500	19.69"
S60-HC	ES60-1TS	SS304	1610	63.39"	460	18.11"	500	19.69"
S72-HC	ES72-1TS	SS304	1897	74.69"	460	18.11"	500	19.69"
S48MT-HC	ES48MT-1TS	SS304	1264	49.76"	460	18.11"	500	19.69"
S60MT-HC	ES60MT-1TS	SS304	1594	62.76"	460	18.11"	500	19.69"
S72MT-HC	ES72MT-1TS	SS304	1862	73.30"	460	18.11"	500	19.69"
UR27-HC / UF27-HC	EUC27-1TS	SS304	744	29.29"	460	18.11"	500	19.69"
UR48-HC / UF48-HC	EUC48-1TS	SS304	1264	49.76"	460	18.11"	500	19.69"
UR60-HC / UF60-HC	EUC60-1TS	SS304	1594	62.76"	460	18.11"	500	19.69"
UR72-HC / UF72-HC	EUC72-1TS	SS304	1862	73.30"	460	18.11"	500	19.69"
P47-HC	EP44-1TS	SS304	1243	48.94"	482	18.98"	540	19.69"
P40-HC	EP70-1TS	SS304	1838	72.36"	482	18.98"	540	19.69"
P94-HC	EP93-1TS	SS304	2433	95.79"	482	18.98"	540	19.69"



REFRIGERATION HC



Under Counter Refrigerators


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
UR27-ES-HC	1	1	27.8	29.9	35.5	3/8	115/60/1	1.5	5-15P
UR48-ES-HC	2	2	48.2	29.9	35.5	3/8	115/60/1	3	5-15P
UR61-ES-HC	2	2	61.2	29.9	35.5	3/8	115/60/1	3	5-15P
UR72-HC	3	3	71.7	29.9	35.5	3/8	115/60/1	3.5	5-15P

DIMENSIONS

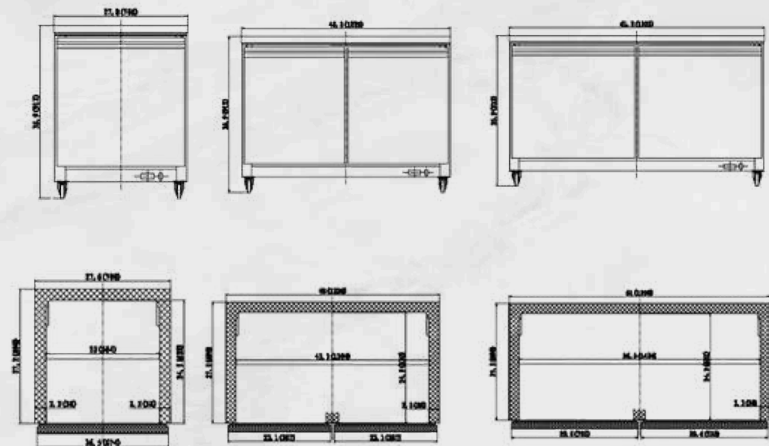

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34°F – 38°F
- Environmentally friendly R600A refrigerant
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed
- Energy Star 5.0 approved models: UR27-ES-HC, UR48-ES-HC, UR61-ES-HC



REFRIGERATION HC



Under Counter Freezers


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	L(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
UF27-HC	1	1	27.8	29.9	35.4	1/2	115/60/1	1.9	5-15P
UF48-HC	2	2	48.2	29.9	35.4	1/2	115/60/1	2.4	5-15P
UF61-HC	2	2	61.2	29.9	35.4	1/2	115/60/1	5	5-15P
UF72-HC	3	3	71.7	29.9	35.4	5/8	115/60/1	6	5-15P

DIMENSIONS

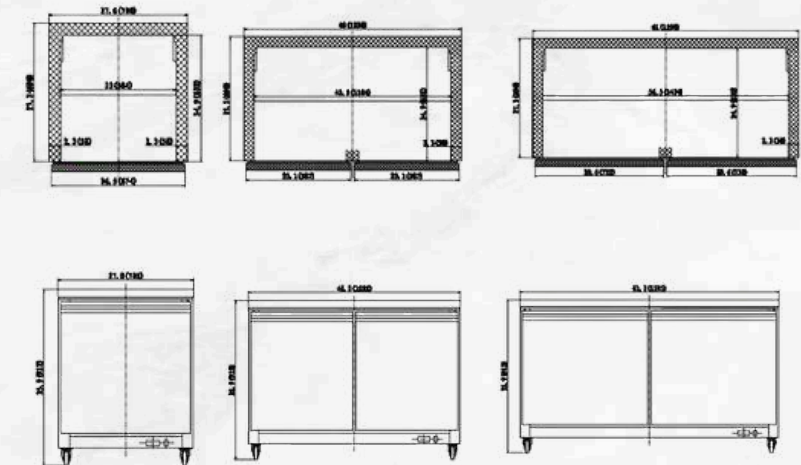

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 7°F to -1°F
- Environmentally friendly R290A refrigerant
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Field-reversible door (UF27-HC)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC



NEW Low Height Under Counter Model Refrigerator


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	HP	Refrigerant Amount	Voltage	Amps	NEMA Plug
UR2732-HC	1	1	27.75	29.9375	32	1/10	247g	115V/60Hz	12/31	5-15P
UR4832-HC	2	2	48.25	29.9375	32	1/8	265g	115V/60Hz	1/2	5-15P
UR6132-HC	2	2	61.25	29.9375	32	1/8	282g	115V/60Hz	1/2	5-15P
UR7232-HC	3	3	71.75	29.9375	32	1/8	459g	115V/60Hz	1/2	5-15P

DIMENSIONS

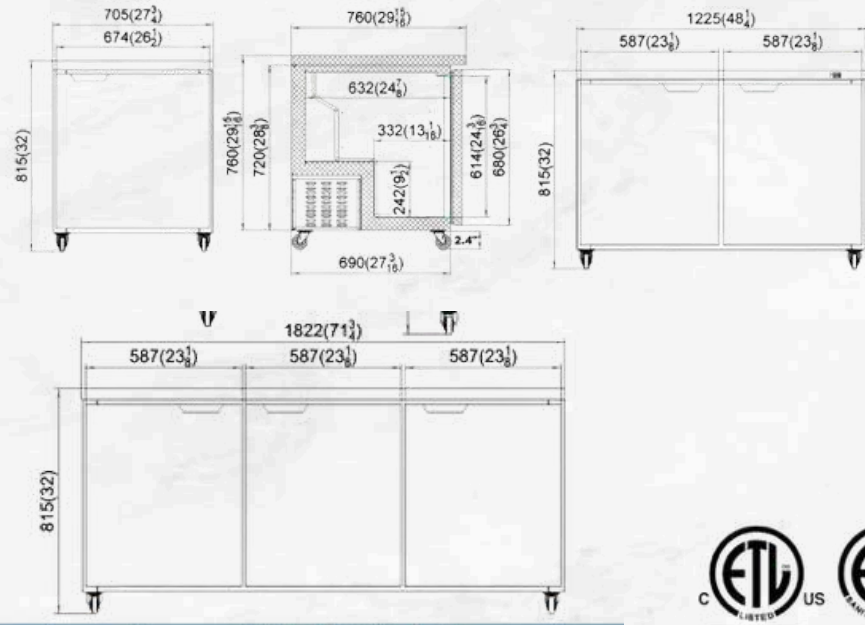

STANDARD FEATURES

Performance

- Solid state thermostat with digital display (accurate to $\pm 1^\circ$)
- Temperature range: 34°F – 38°F
- R600a refrigerant (UR7232-HC uses R290)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation
- Polyurethane insulation (CFC-free)

Construction

- Stainless steel front, top, and sides
- Stainless steel interior floor with galvanized bottom
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Aluminum external back
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Magnetic gaskets (tool-free replacement)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC




NEW Low Height Under Counter Model Freezer
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	Shp L (in)	Shp D (in)	Shp H (in)	HP	Voltage	Amps	NEMA Plug
UR2732-SH-C	1	1	27.75	29.9375	32	30	31.5	38.2	1/10	115V/60Hz	15	5-15P
UR4832-SH-C	2	2	48.25	29.9375	32	50	31.5	38.2	1/8	115V/60Hz	3	5-15P
UR6132-SH-C	2	2	61.25	29.9375	32	63	31.5	38.2	1/8	115V/60Hz	3	5-15P
UR7232-SH-C	3	3	71.75	29.9375	32	74	31.5	38.2	1/8	115V/60Hz	3	5-15P

DIMENSIONS

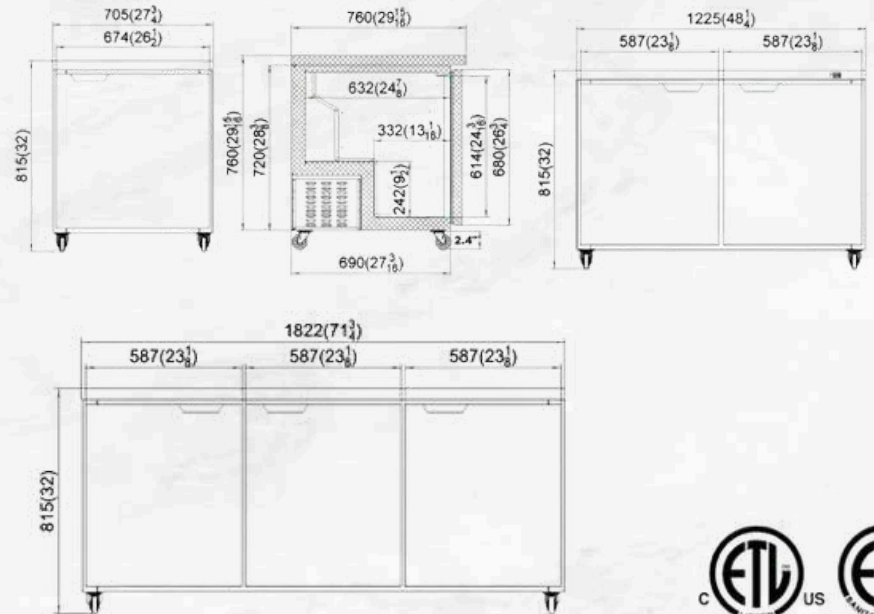

STANDARD FEATURES

Performance

- Solid state thermostat with digital display (accurate to $\pm 1^\circ$)
- Temperature range: -10°F to $+10^\circ\text{F}$
- Environmentally friendly R290 refrigerant
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation
- Polyurethane insulation (CFC-free)

Construction

- Stainless steel front, top, and sides
- Stainless steel interior floor with galvanized bottom
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Aluminum external back
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Magnetic gaskets (tool-free replacement)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC




NEW Low Height Under Counter Model Refrigerator with Stainless Steel Interior
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	Ship L (in)	Ship D (in)	Ship H (in)	HP	Voltage	Amps	NEMA Plug
UF2732-SHC	1	1	27.75	29.9375	32	30	31.5	38.2	1/4	115V/60Hz	1.5	5-15P
UF4832-SHC	2	2	48.25	29.9375	32	50	31.5	38.2	1/3	115V/60Hz	3	5-15P
UF6132-SHC	2	2	61.25	29.9375	32	63	31.5	38.2	1/2	115V/60Hz	3	5-15P
UF7232-SHC	3	3	71.75	29.9375	32	74	31.5	38.2	3/4	115V/60Hz	3	5-15P

DIMENSIONS

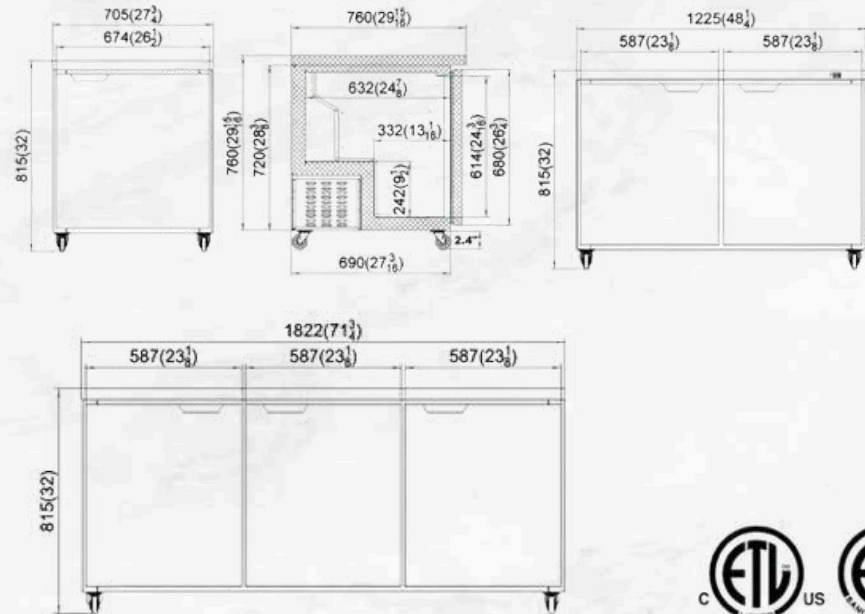

STANDARD FEATURES

Performance

- Solid state thermostat with digital display (accurate to $\pm 1^\circ$)
- Temperature range: 34°F – 38°F
- R600a refrigerant (UR232-HC uses R290)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation
- Polyurethane insulation (CFC-free)

Construction

- Stainless steel front, top, and sides
- Stainless steel interior (sides, top, and bottom)
- Stainless steel interior floor
- Stainless steel door liner
- Aluminum external back
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Magnetic gaskets (tool-free replacement)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes
- Galvanized bottom

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC




NEW Low Height Under Counter Model Refrigerator with Stainless Steel Interior
Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	Shp L (in)	Shp D (in)	Shp H (in)	HP	Voltage	Amps	NEMA Plug
UF2732-HC	1	1	27.75	29.9375	32	30	31.5	38.2	1/4	115V/60Hz	15	5-15P
UF4832-HC	2	2	48.25	29.9375	32	50	31.5	38.2	1/3	115V/60Hz	3	5-15P
UF6132-HC	2	2	61.25	29.9375	32	63	31.5	38.2	1/2	115V/60Hz	3	5-15P
UF7232-HC	3	3	71.75	29.9375	32	74	31.5	38.2	3/4	115V/60Hz	3	5-15P

DIMENSIONS

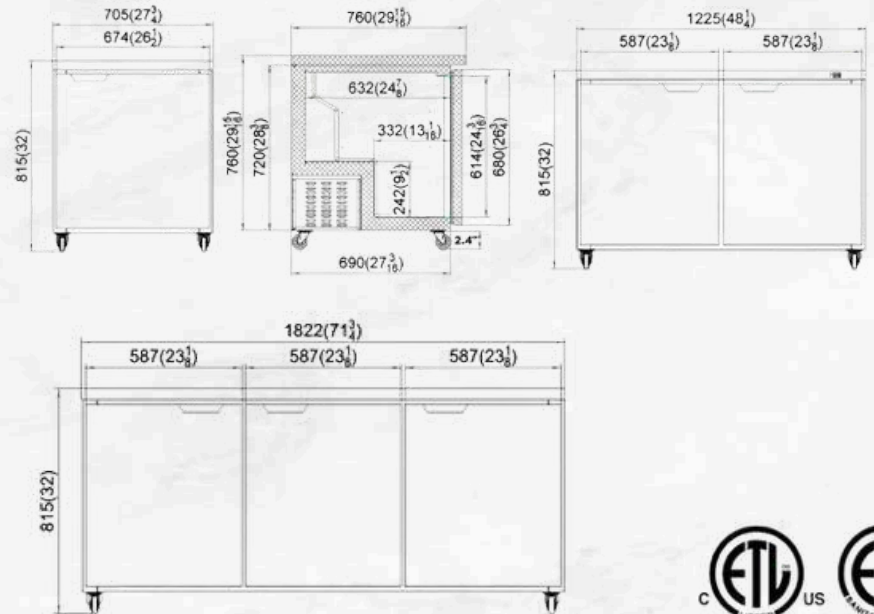

STANDARD FEATURES

Performance

- Solid state thermostat with digital display (accurate to $\pm 1^\circ$)
- Temperature range: 34°F – 38°F
- R600a refrigerant (UR232-HC uses R290)
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation
- Polyurethane insulation (CFC-free)

Construction

- Stainless steel front, top, and sides
- Stainless steel interior (sides, top, and bottom)
- Stainless steel interior floor
- Stainless steel door liner
- Aluminum external back
- Galvanized bottom
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Magnetic gaskets (tool-free replacement)
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC



Work Top Freezer


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	L (in)	D (in)	H (in)	HP	Voltage	Amps	NEMA Plug
WTF27-HC	1	1	27.8	29.9	39.8	1/2	115/60/1	19	5-15P
WTF48-HC	2	2	48.2	29.9	39.8	1/2	115/60/1	24	5-15P
WTF61-HC	2	2	61.2	29.9	39.8	1/2	115/60/1	5	5-15P
WTF72-HC	3	3	71.7	29.9	39.8	5/8	115/60/1	6	5-15P

DIMENSIONS

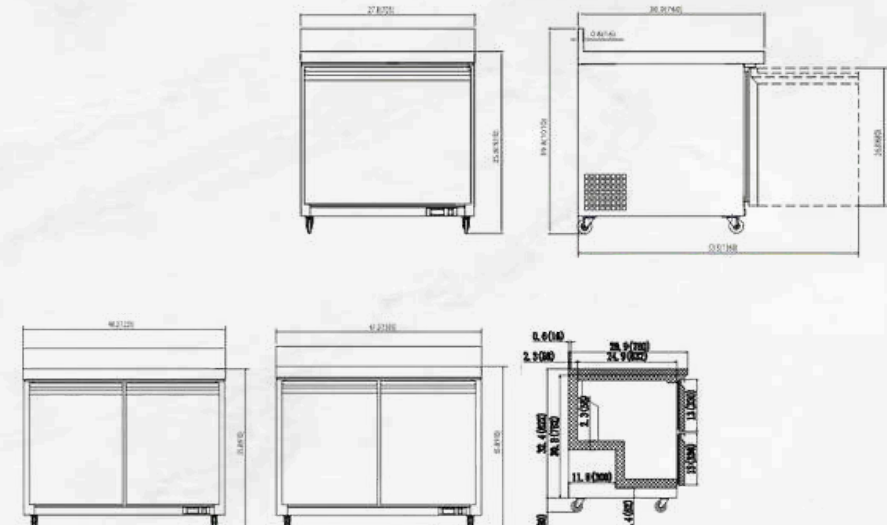

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: -7°F to -1°F
- Environmentally friendly R290A refrigerant
- Capillary tube refrigerating system
- Rear-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- One-piece stainless steel tabletop with 3" backsplash
- Stainless steel doors with ABS liner
- ABS cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Full-length integrated door handle
- Solid construction
- Casters with two front brakes

Clearance & Efficiency

- 2" rear and side clearance
- ETL Listed



REFRIGERATION HC



36" Model CHEF BASE REFRIGERATOR


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Drawers	GN Pans	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	HP	Voltage	Amps	NEMA Plug
ECB36-HD-HC	2	2 ¹ / ₁ x 4 ¹ / ₆	38	31.9	25.6	1/3	115/60/1	15	5-15P

DIMENSIONS

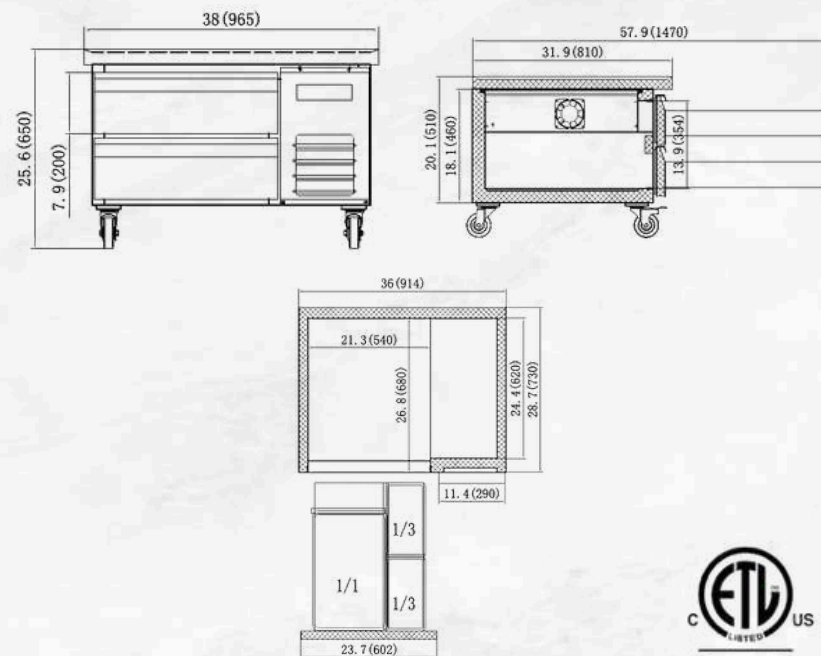

STANDARD FEATURES Performance

- Electronic control system with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (eco-friendly, high-efficiency)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Easy-access condenser coil for cleaning and service

Construction

- Stainless steel front, top, and sides
- Stainless steel drawers
- Stainless steel cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Stainless steel top with marine edge to contain drips and spills
- Heavy-duty drawer sliders
- Maximum weight capacity per drawer: 265 lbs
- Maximum total weight capacity: 1,172 lbs
- Heavy-duty swivel casters

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC



48" Model


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Drawers	GN Pans	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	HP	Voltage	Amps	NEMA Plug
ECB48-HD-HC	2	4*1/1	50	31.9	25.6	1/3	115/60/1	21	5-15P

DIMENSIONS

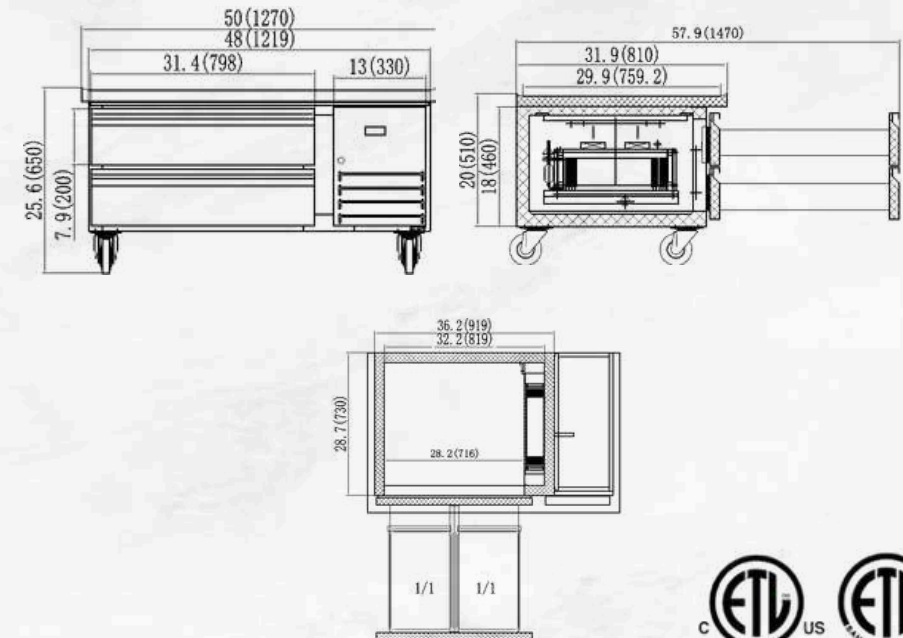

STANDARD FEATURES Performance

- Electronic control system with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (eco-friendly, high-efficiency)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Easy-access condenser coil for cleaning and service

Construction

- Stainless steel front, top, and sides
- Stainless steel drawers
- Stainless steel cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Stainless steel top with marine edge to contain drips and spills
- Heavy-duty drawer sliders
- Maximum weight capacity per drawer: 265 lbs
- Maximum total weight capacity: 1,141 lbs
- Heavy-duty swivel casters

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC



60" Model



Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Drawers	GN Pans	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	HP	Voltage	Amps	NEMA Plug
ECB60+HD+HC	2	6*1/1	62	31.9	26	1/3	115/60/1	21	5-15P

DIMENSIONS

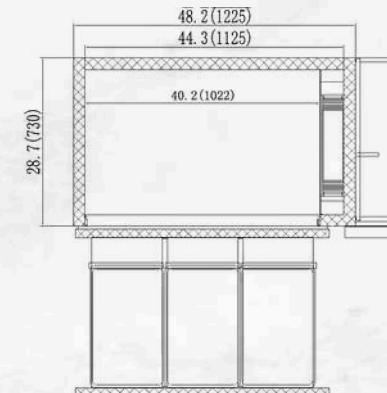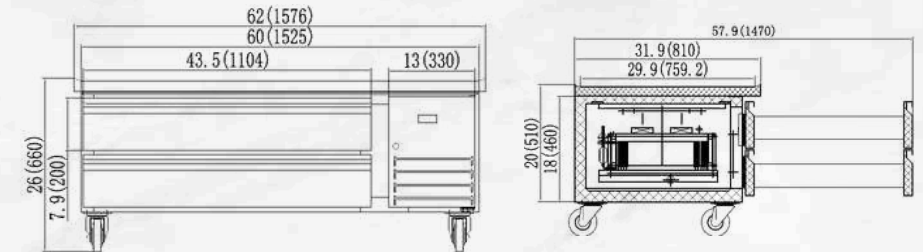

STANDARD FEATURES

Performance

- Electronic control system with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (eco-friendly, high-efficiency)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Easy-access condenser coil for cleaning and service

Construction

- Stainless steel front, top, and sides
- Stainless steel drawers
- Stainless steel cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Stainless steel top with marine edge to contain drips and spills
- Heavy-duty drawer sliders
- Maximum weight capacity per drawer: 265 lbs
- Maximum total weight capacity: 1,089 lbs
- Heavy-duty swivel casters

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC



72" Model




Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Drawers	GN Pans	Cabinet L (in)	Cabinet D (in)	Cabinet H (in)	HP	Voltage	Amps	NEMA Plug
ECB72-HD-HC	4	4*1/1+4*1/3	74	31.9	26	1/3	115/60/1	21	5-15P

DIMENSIONS

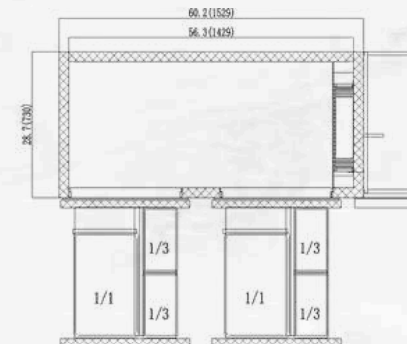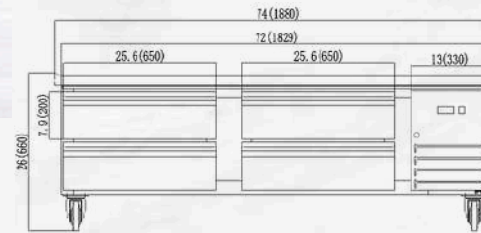

STANDARD FEATURES Performance

- Electronic control system with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (eco-friendly, high-efficiency)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Easy-to-access condenser coil for cleaning and service

Construction

- Stainless steel front, top, and sides
- Stainless steel drawers
- Stainless steel cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- Stainless steel top with marine edge to contain drips and spills
- Heavy-duty drawer sliders
- Maximum weight capacity per drawer: 265 lbs
- Maximum total weight capacity: 1,697 lbs
- Six heavy-duty swivel casters

Clearance & Efficiency

- ETL Listed



REFRIGERATION HC



Pizza Prep Models


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	Pans	L (in)	D (in)	H (in)	HP	Voltage	Amps
P47-HC	1	1	6 (1/3)	47.2	35	41.7	1/2	115/60/1	5
P70-HC	2	2	9 (1/3)	70.7	35	41.7	1/2	115/60/1	5
P94-HC	3	3	12 (1/3)	94	35	41.7	3/4	115/60/1	5.5

DIMENSIONS

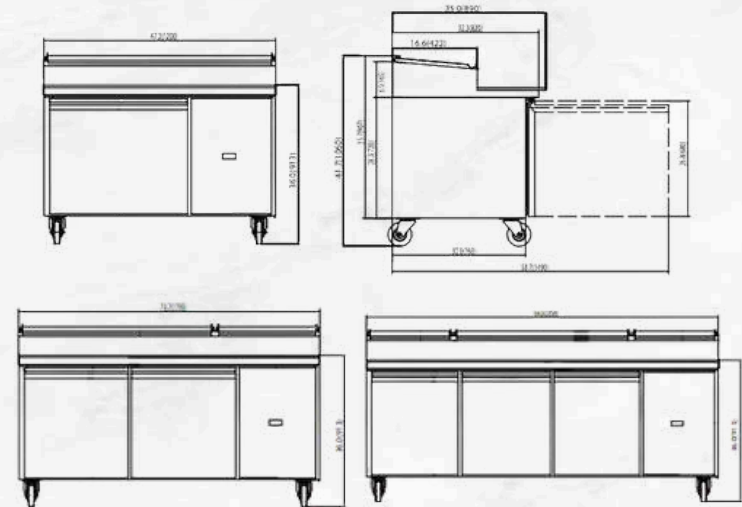

STANDARD FEATURES Performance

- Solid state thermostat with digital display
- Temperature range: 34–38°F
- Environmentally friendly R290 refrigerant
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Cool air intake
- EZ slide-out condenser
- Whisper-quiet operation

Construction

- Stainless steel front, top, and sides
- Stainless steel doors with ABS liner
- Powder-coated aluminum cabinet interior
- Stainless steel interior floor
- Aluminum external back
- Polyurethane insulation (CFC-free)
- 1/3 size Lexan pans included
- Full-length vinyl cutting board included
- Heavy-duty PVC-coated shelves
- Self-closing doors that remain open past 90°
- Full-length integrated door handle
- Solid construction
- Heavy-duty damage-free packaging
- Casters with two front brakes

Clearance & Efficiency

- 2" side clearance
- 2" rear clearance
- 2" spacers provided for proper airflow
- ETL Listed



REFRIGERATION HC



Solid Door Bar Bar Coolers


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W (in)	D (in)	H (in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
BB-2D-60-SH-C	2	4	58.7	27.6	40.35	3/8	115/60/1	3	5-15P
BB-2D-70-SH-C	2	4	69	27.6	40.35	3/8	115/60/1	3	5-15P
BB-3D-90-SH-C	3	6	90.4	27.6	40.35	1/2	115/60/1	3	5-15P

DIMENSIONS

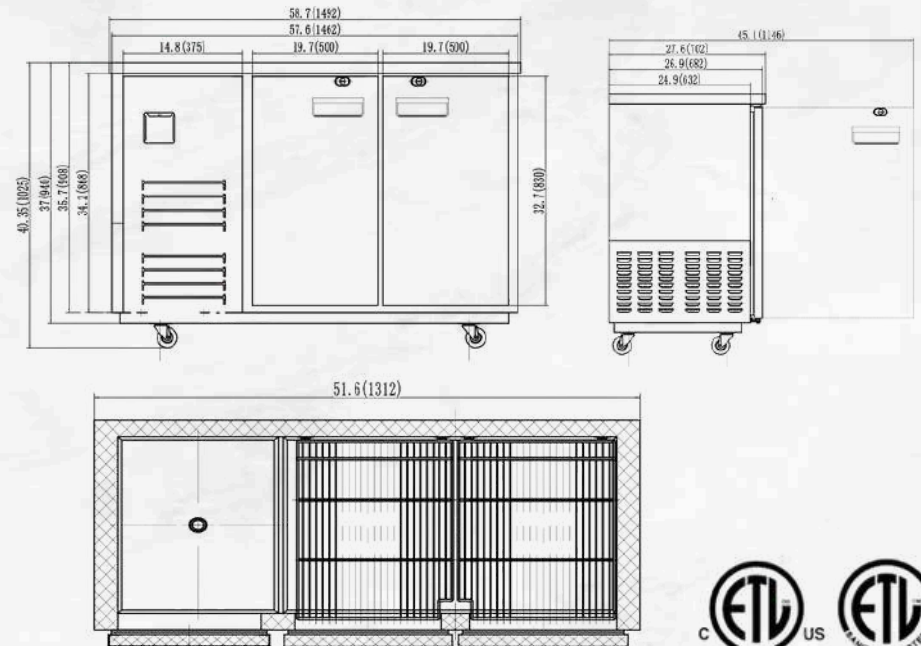

STANDARD FEATURES Performance

- Electronic thermostat with digital LED temperature display
- Temperature range: 33°F – 38°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Bright LED interior lighting

Construction

- 430 stainless steel exterior top and sides
- Painted black solid doors
- Painted black external back
- Stainless steel cabinet interior
- Stainless steel interior floor
- Polyurethane insulation (CFC-free)
- Self-closing doors
- Magnetic gasket (tool-free replacement)
- Four casters (two front locking)

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified



REFRIGERATION HC



Glass Door Back Bar Coolers


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Doors	Shelves	W (in)	D (in)	H (in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
BB-2D-60-G-SHC	2	4	58.7	27.6	40.35	3/8	115/60/1	3	5-15P
BB-2D-70-G-SHC	2	4	69	27.6	40.35	3/8	115/60/1	3	5-15P
BB-3D-90-G-SHC	3	6	90.4	27.6	40.35	1/2	115/60/1	3	5-15P

DIMENSIONS

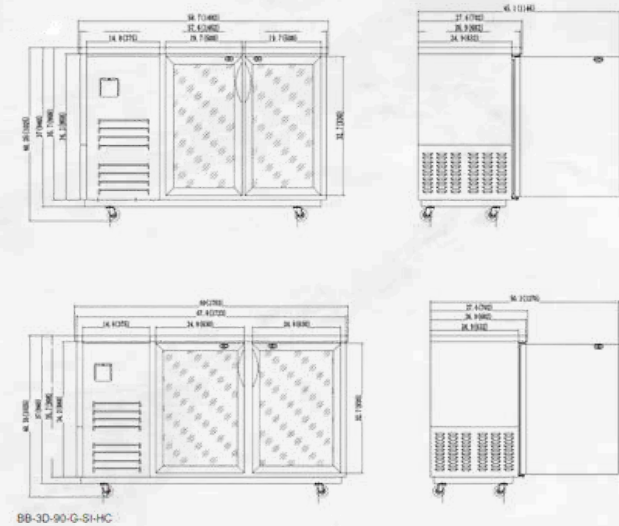

STANDARD FEATURES

Performance

- Electronic thermostat with digital LED temperature display
- Temperature range: 33°F – 38°F
- R290 refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Auto-defrosting system
- Bright LED interior lighting

Construction

- 430 stainless steel exterior top and sides
- Glass doors
- Painted black external back
- Stainless steel cabinet interior
- Stainless steel interior floor
- Polyurethane insulation (CFC-free)
- Self-closing doors
- Magnetic gasket (tool-free replacement)
- Two-piece adjustable shelves
- Four casters (two front locking)

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified



REFRIGERATION HC



Beer Dispensers Models BCBD1, BCBD2-1, BCBD2-2


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Faucets	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
BCBD1-SH-C	1	24.1	29.9	38.6	1/8	115/60/1	22	5-15P
BCBD2-1-SH-C	2	49.1	24.4	36.4	2/5	115/60/1	3	5-15P
BCBD2-2-SH-C	2	49.1	24.4	36.4	2/5	115/60/1	3	5-15P

DIMENSIONS

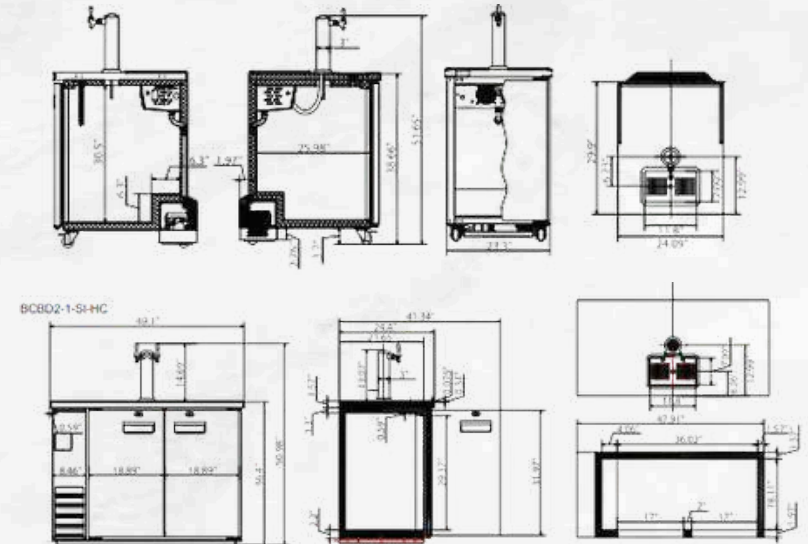

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 33°F – 41°F
- R290 refrigerant (CFC-free)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Cold air channeled directly into beer column to reduce foaming and maximize draft performance

Construction

- Powder-coated steel exterior (black finish)
- Stainless steel interior (430 stainless steel)
- 430 stainless steel interior floor
- Powder-coated steel external back
- 3" diameter stainless steel insulated beer column
- Hinged doors
- Polyurethane insulation (CFC-free)
- Heavy-duty epoxy-coated dividers (3 or 4 levels)
- LED lighting

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified



REFRIGERATION HC



Beer Dispensers Models BCBD3-1, BCBD3-2, BCBD4-2


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Faucets	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp	NEMA Plug
BCBD3-1-SHC	2	61.06	24.4	36.4	2/5	115/60/1	3	5-15P
BCBD3-2-SHC	2	61.06	24.4	36.4	2/5	115/60/1	3	5-15P
BCBD4-2-SHC	4	73.1	24.4	36.4	1/2	115/60/1	3	5-15P

DIMENSIONS

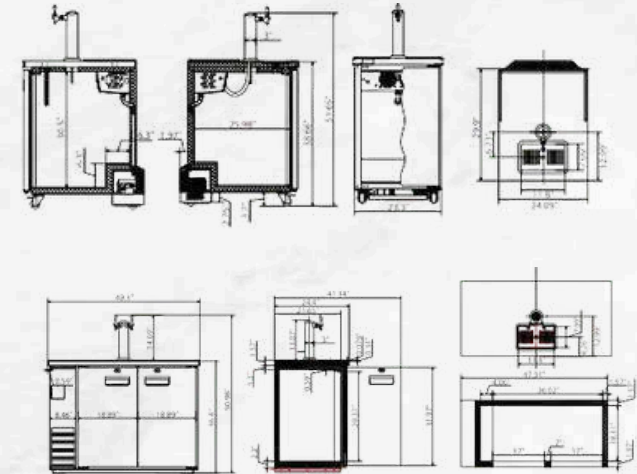

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (CFC-free)
- Capillary tube refrigerating system
- Side-mounted condensing unit
- Cold air channeled directly into beer column to reduce foaming and maintain draft performance

Construction

- Stainless steel exterior top
- Powder-coated steel exterior sides and back (black finish)
- Stainless steel interior (430 stainless steel)
- 430 stainless steel interior floor
- 3" diameter stainless steel insulated beer column
- Hinged doors
- Polyurethane insulation (CFC-free)
- LED lighting

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified



REFRIGERATION HC



Slide Top Bottle Coolers



Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Lids	Dividers	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp
BST-36-SHC	1	-	36.8	27	35	3/8	115/60/1	1.8
BST-50-SHC	2	2	49.4	27	35	1/2	115/60/1	3
BST-65-SHC	2	3	64.3	27	35	1/2	115/60/1	3
BST-94-SHC	3	3	95.3	27	35	1/2	115/60/1	3

DIMENSIONS

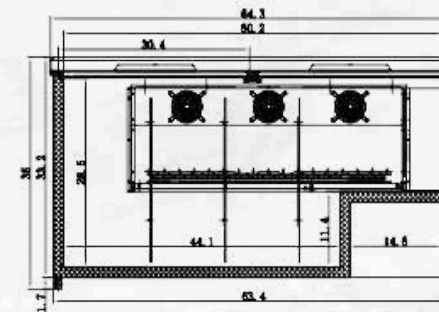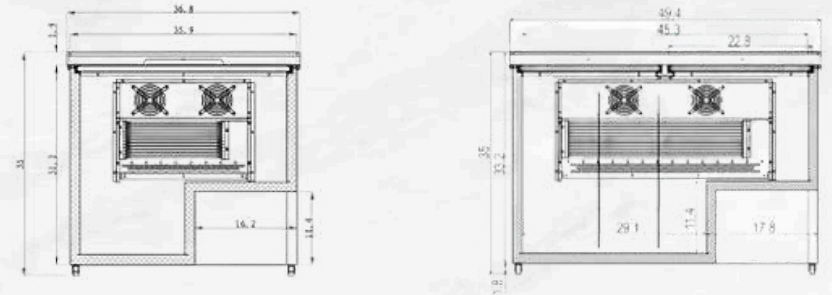

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: 34°F – 38°F
- R600a refrigerant (BST-94-HC uses R290)
- Capillary tube refrigerating system
- Forced-air cooling system
- Self-defrosting evaporator
- Side-mounted condensing unit
- LED interior lighting

Construction

- Stainless steel exterior top and sides
- Stainless steel sliding doors
- Painted black steel external back
- 430 stainless steel cabinet interior
- 304 stainless steel interior floor
- Polyurethane insulation (CFC-free)
- Heavy-duty epoxy-coated adjustable dividers (3 or 4 levels)
- Bottle cap opener with cap catcher (standard)
- Four 1" fixed rollers

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified



REFRIGERATION HC



Slide Top Glass Froster


Engineered for durability. Designed for Performance.



MODEL COMPARISON

Model	Lids	Shelves	W(in)	D(in)	H(in)	HP	Voltage/Hz/ph	Amp
EGF24-SHC	1	3	24.1	27	34.8	1/5	115/60/1	2
EGF35-SHC	1	4	36.9	27	34.8	1/5	115/60/1	2

DIMENSIONS

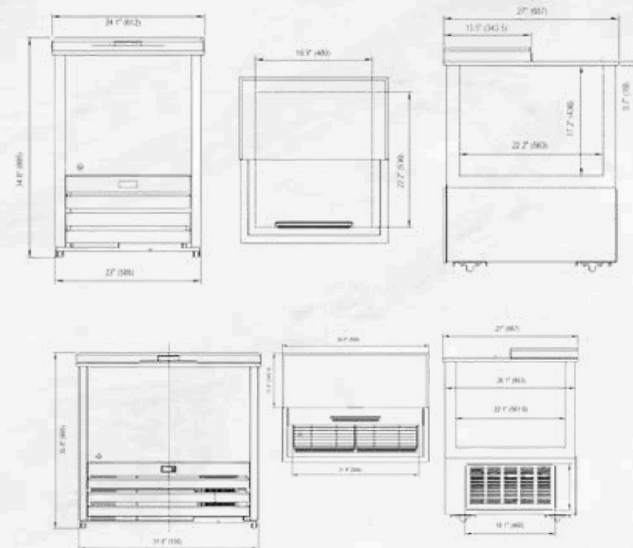

STANDARD FEATURES

Performance

- Solid state thermostat with digital display
- Temperature range: -4°F – -5°F
- R600a refrigerant (CFC-free refrigerant and foam)
- Capillary tube refrigerating system
- Forced-air cooling system
- Self-defrosting evaporator
- Bottom-mounted condensing unit
- LED interior lighting

Construction

- Stainless steel exterior top and sides
- Stainless steel sliding doors
- Painted black steel external back
- 430 stainless steel cabinet interior
- 304 stainless steel interior floor
- Polyurethane insulation (CFC-free)
- Heavy-duty epoxy-coated shelves (included)
- Locking doors
- Bottle cap opener with cap catcher (standard)
- Four 1" fixed rollers

Clearance & Efficiency

- ETL Listed
- ANSI / NSF-7 certified
- Measured efficiency:
 - EGF24-HC: 1.13 kWh/day
 - EGF36-HC: 1.19 kWh/day




REFRIGERATION HC



Entree Topping Rail All Models


Engineered for durability. Designed for Performance.

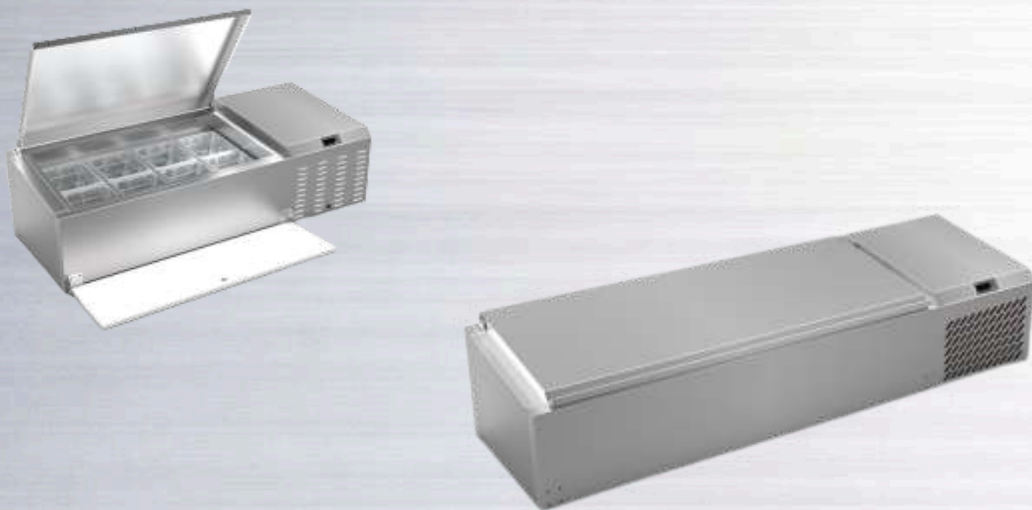

MODEL COMPARISON

Model	Pans	Cutting Board	W(in)	D(in)	H(in)	HP	Voltage	Amps	NEMA Plug
ETR-46-HC	8	No	45.8	17.4	13.5	1/5	115/60/1	2	5-15P
ETR-46CB-HC	8	Yes	45.8	17.4	13.5	1/5	115/60/1	2	5-15P
ETR-60-HC	12	No	60	17.4	13.5	1/5	115/60/1	2	5-15P
ETR-60CB-HC	12	Yes	60	17.4	13.5	1/5	115/60/1	2	5-15P

DIMENSIONS

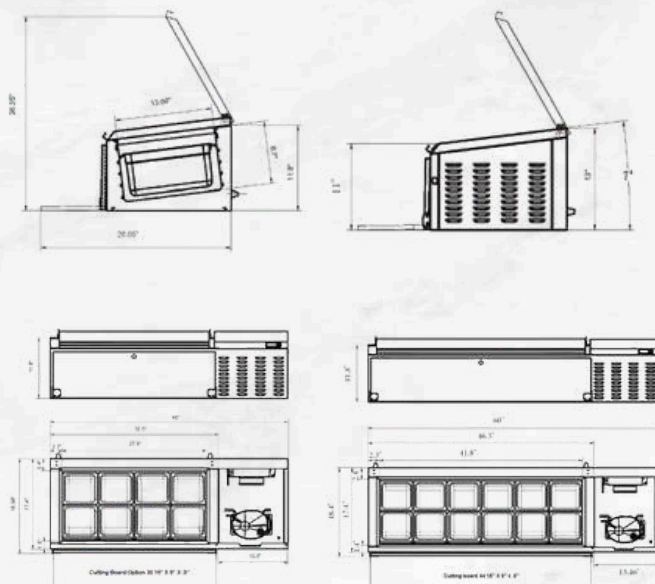

STANDARD FEATURES Performance

- Electronic control system with digital display
- Temperature range: 34°F – 38°F
- R290 refrigerant (eco-friendly, high-efficiency)
- Capillary tube refrigerating system
- Cold wall cooling system (no evaporator)
- Side-mounted condensing unit
- Easy-access condenser coil for cleaning and service

Construction

- 304 stainless steel exterior and interior
- Stainless steel external back
- Polyurethane insulation (CFC-free)
- Lexan pans included
- Vinyl cutting board (optional)

Clearance & Efficiency

- ETL Listed



