




Refrigeration "X"

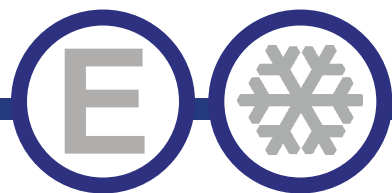

FULL LENGTH MERCHANDISER

EGM295X



EGM539X



EGM787X

Model	Size
EGM295X	29" 1 DOOR
EGM539X	54" 2 DOOR
EGM787X	78" 3 DOOR

STANDARD FEATURES

- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33° F to 41°F (.5°C to 5°C) for the best food, beverage and soft drinks preservation in extreme conditions.
- Rounded corner design inside of the cabinet makes it easy to clean the inside storage area.
- Exterior construction is attractive coated steel in black finish. Interior - attractive aluminum liner with stainless steel floor.
- L.E.D. Lighting
- Electronic control system makes it easy to adjust temperature set point and defrost frequency. Error codes to diagnose service issues.
- 3" swivel casters with brakes provided.
- Easy to access condenser coil for cleaning and service
- Uses R290 refrigerant, which is eco-friendly and more efficient
- Double pane glass door self closing. Positive seal, torsion type closure system.
- Foamed with polyurethane, high-density cell insulation that has zero ozone depletion potential.
- Adjustable, heavy duty PVC coated shelves with removable marketing shelf tag holders.
- Gravity Shelving Option Available. Add "-GV" to the end of the model number for Gravity Shelving



- **Warranty:** Two year parts & labor warranty, and additional three years on compressor.

*Not suitable for installation in a non-commercial or residential applications.

CONFORMS TO UL STD 60335-2-89

Customer Service (704) 900-2068 - Email: greatfood@entree.biz Website: www.entree.biz



Intertek




Intertek





DETAILS AND DIMENSIONS

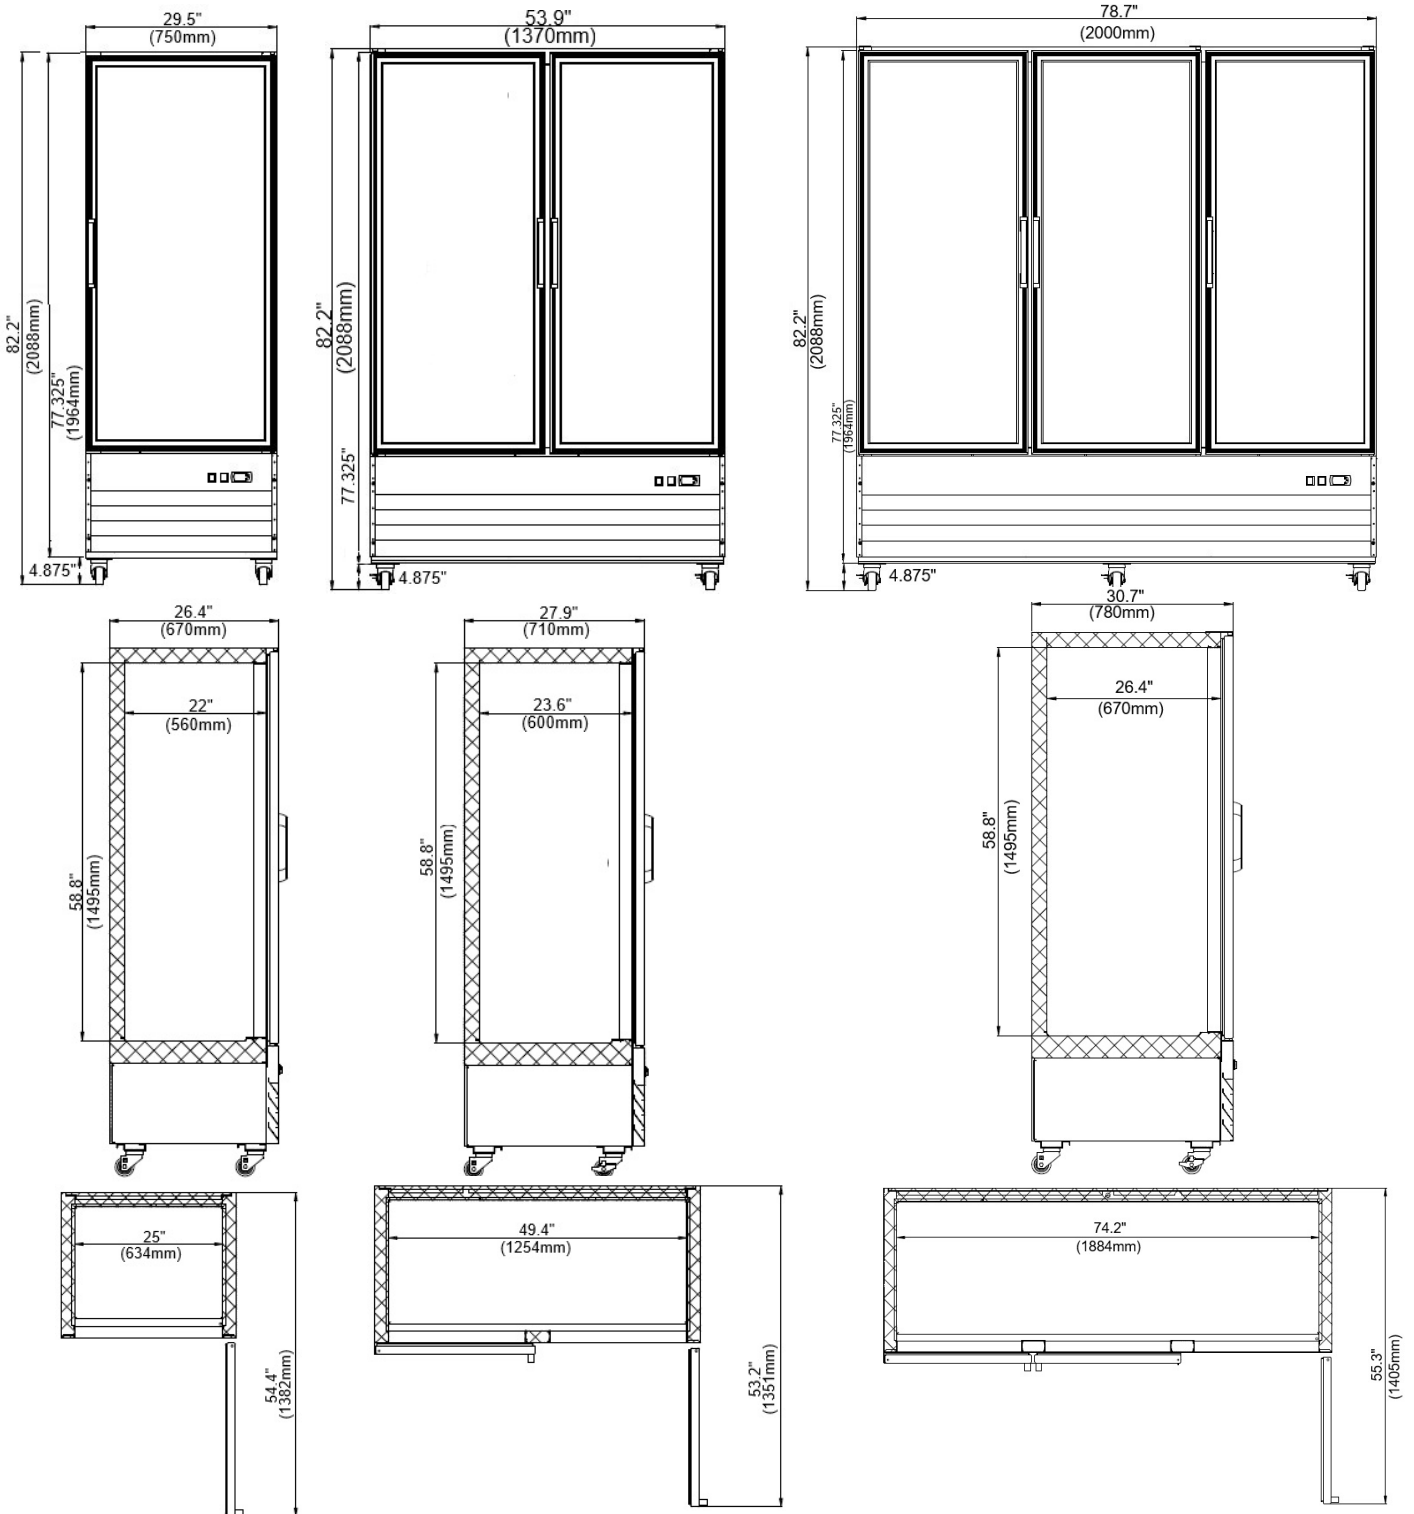

Model #	Doors	Shelves	Cabin Dimensions			HP	Voltage	Amps	NEMA Plug	Cord Length (Appx)	Net Weight	Shipping Dimensions			Shipping Weight
			Length	Depth	Height							Length	Depth	Height	
EGM295X	1	4	29.5"	26.4"	82.2"	1/4	115V	3.4	5-15P	98" (16AWG)	242 Lbs.	32.3"	30.1"	84.6"	269 Lbs.
EGM539X	2	8	53.9"	27.9"	82.2"	1/3	115V	4.5	5-15P	98" (16AWG)	374 Lbs.	56.7"	31.7"	84.6"	414 Lbs.
EGM787X	3	12	78.7"	30.7"	82.2"	3/7	115V	6.9	5-15P	98" (14AWG)	550 Lbs.	81.5"	34.4"	84.6"	610 Lbs.