



# Refrigeration "X"



## Salad and Sandwich Units



| Model  | Size     |
|--------|----------|
| EST27X | 29" Unit |
| EST36X | 36" Unit |
| EST48X | 48" Unit |
| EST60X | 60" Unit |
| EST70X | 70" Unit |

### STANDARD FEATURES

- Stainless steel exterior, aluminum interior and back.
- Stainless Interior available - add suffix "-SI" to the model number. i.e. EST27X-SI
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Comes standard with NSF approved food pans and cutting board.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed 4" swivel casters with brakes.
- Easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Warranty: Two year parts & labor warranty, and additional three years on compressor.

\*Not suitable for installation in a non-commercial or residential applications.









| Items              | Description                             | Items                | Description                                            |
|--------------------|-----------------------------------------|----------------------|--------------------------------------------------------|
| Front, top & sides | <a href="#">Stainless steel</a>         | Temperature control  | <a href="#">Solid state thermostat/Digital display</a> |
| Doors              | <a href="#">Stainless steel</a>         | Approvals            | <a href="#">ETL LISTED</a>                             |
| External back      | <a href="#">Aluminum</a>                | Refrigerating system | <a href="#">Capillary tube</a>                         |
| Cabinet interior   | <a href="#">Aluminum</a>                | Refrigerant          | <a href="#">R290</a>                                   |
| Interior floor     | <a href="#">Stainless steel</a>         | Temperature range    | <a href="#">33°F to 41°F</a>                           |
| Insulation         | <a href="#">Polyurethane (CFC free)</a> | Evaporator           | <a href="#">Powder coated aluminum/copper</a>          |
| Shelves            | <a href="#">Heavy duty, PVC coating</a> | Condensing unit      | <a href="#">Bottom mounted</a>                         |

CONFORMS TO NSF/ANSI STD 7





# DETAILS AND DIMENSIONS

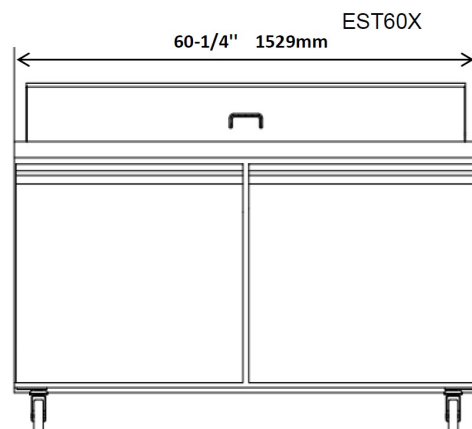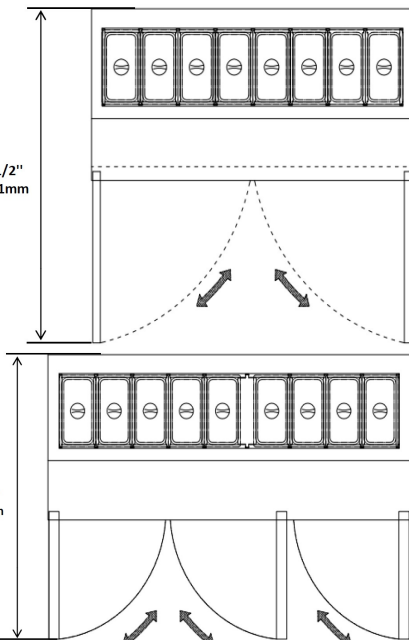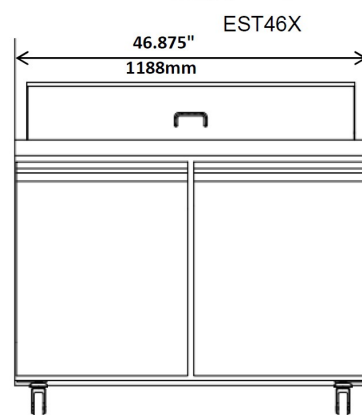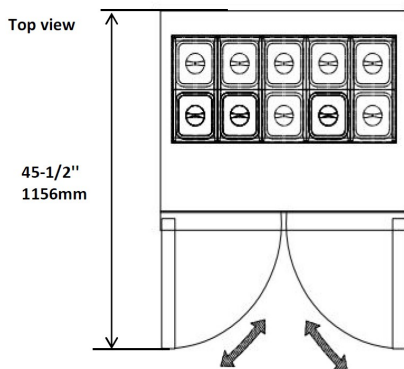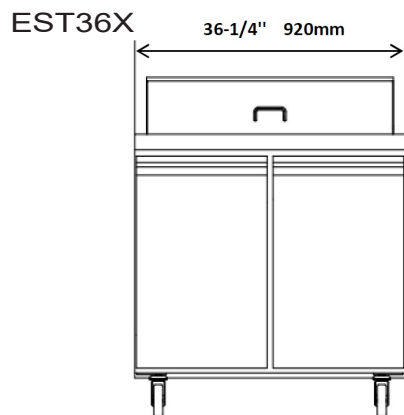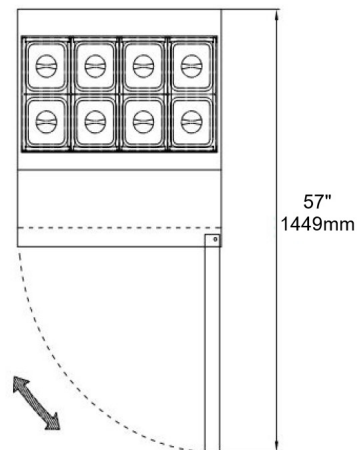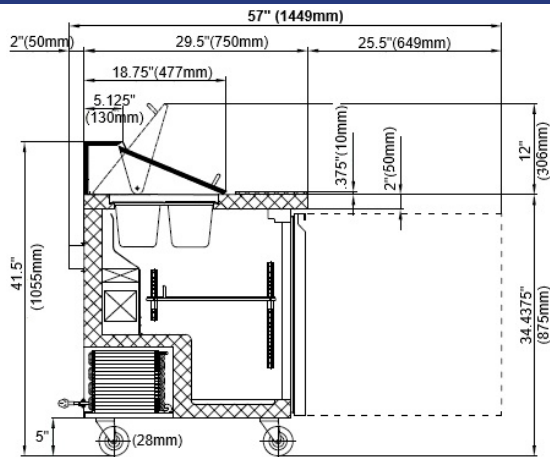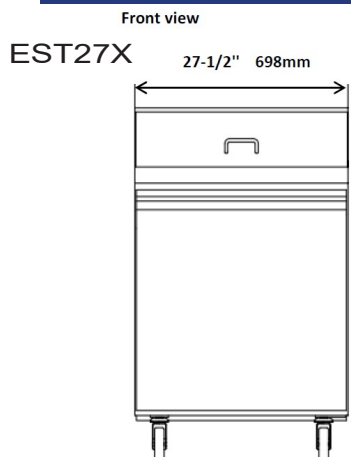

| Model  | Doors | Shelves | Cabinet Dim (inches) |      |       | HP  | Voltage  | Amps | NEMA Plug | Cord Length | Crated Weight |
|--------|-------|---------|----------------------|------|-------|-----|----------|------|-----------|-------------|---------------|
|        |       |         | L                    | D    | H     |     |          |      |           |             |               |
| EST27X | 1     | 1       | 27.5                 | 29.5 | 41.50 | 1/5 | 115/60/1 | 4.5  | 5-15P     | 7.5'        | 255           |
| EST36X | 2     | 2       | 36.25                | 29.5 | 41.50 | 1/5 | 115/60/1 | 5.5  | 5-15P     | 6.9         | 341           |
| EST46X | 2     | 2       | 46.875               | 29.5 | 41.50 | 1/4 | 115/60/1 | 6.5  | 5-15P     | 6.9'        | 394           |
| EST60X | 2     | 2       | 60.2                 | 29.5 | 41.50 | 1/4 | 115/60/1 | 7.0  | 5-15P     | 6.9'        | 451           |
| EST70X | 3     | 3       | 70.4                 | 29.5 | 41.50 | 3/4 | 115/60/1 | 9.4  | 5-15P     | 6'          | 513           |