Refrigeration "HC"

REFRIGERATION UNDERCOUNTER

27" Undercounter Units

All 27" Undercounter Refrigerators and Freezer Models	
UR27-ES-HC	27" Undercounter Refrigerator with Standard Interior Energy Star®
UR27-ES-SI-HC	27" Undercounter Refrigerator with Stainless-Steel Interior Energy Star®
UF27-HC	27" Undercounter Freezerr with Standard Interior
UF27-SI-HC	27" Undercounter Freezer with Stainless-Steel Interior



UR27-ES-HC, UR27-ES-SI-HC
UF27-HC, UF27-SI-HC

STANDARD FEATURES

- Solid state thermostat with digital display with programmable defrost
- Stainless steel front and sides standard on all models.
- “SI” models have stainless steel interior
- Self-closing doors remain open past 90˚
- 27" Door can be reverse swing with additional parts
- Environmentally friendly more energy efficient R600a for refrigerator, R290 for freezers
- EZ slide-out condenser, easier cleaning and serviceable
- Whisper-quiet operation
- Solid construction with “blown-in” polyurethane foam insulation (CFC-free)
- Full-length integrated stainless steel door handle
- 2½” Polyurethane Swivel casters standard, front with brakes.
- Cool air intake on left side, clearance requirement 2” both sides and rear
- 2 Year Parts & Labor Warranty, with and additional 3 years on compressor

***Not suitable for installation in a non-commercial or residential applications.**

ITEMS	DESCRIPTION	ITEMS	DESCRIPTION
Front, top & sides	Stainless-Steel	Shelves	Heavy Duty, PVC Coating
Doors (standard)	Stainless-Steel / ABS liner	Temperature control	Solid State Thermostat/Digital Display
Doors (optional "SI")	Stainless-Steel including liner	Approvals	ETL listed, Conforms to NSF/ANSI STD 7
External back	Galvanized	Refrigerating systems	Capillary Tube
Cabinet interior (standard)	Aluminum Painted	Refrigerant used	Refrigerator:R600, Freezer: R290
Cabinet interior (Optional "SI")	Stainless-Steel	Temperature range	34˚F to 38˚F / -8˚F to 0˚F
Interior floor	Stainless-Steel	Evaporator	Powder Coated Aluminum/Copper
Insulation	Polyurethane (CFC Free)	Condensing unit	Rear Mounted

Entree L.L.C.
Customer Service (704) 900-2068
Email: greatfood@entree.biz
Website: www.entree.biz


ENERGY STAR

Intertek


Intertek


DETAILS AND DIMENSIONS

UR27-ES-HC, UR27-SI-ES-HC,
UF27-HC, UF27-SI-HC FRONT

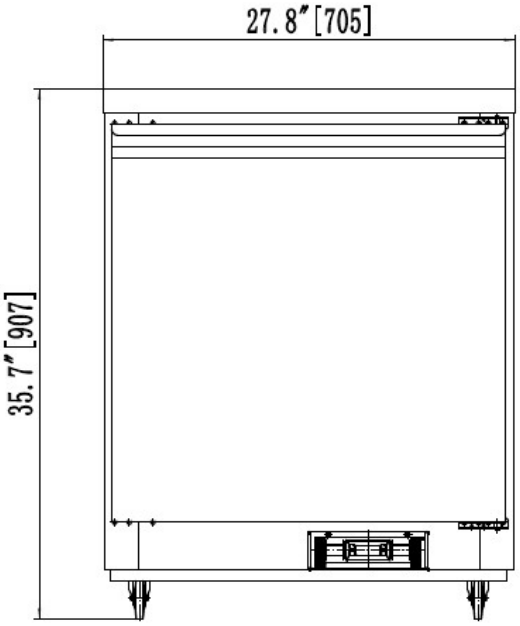

UR27-ES-HC, UR27-SI-ES-HC, UF27-HC AND UF27-SI-HC SIDE VIEW

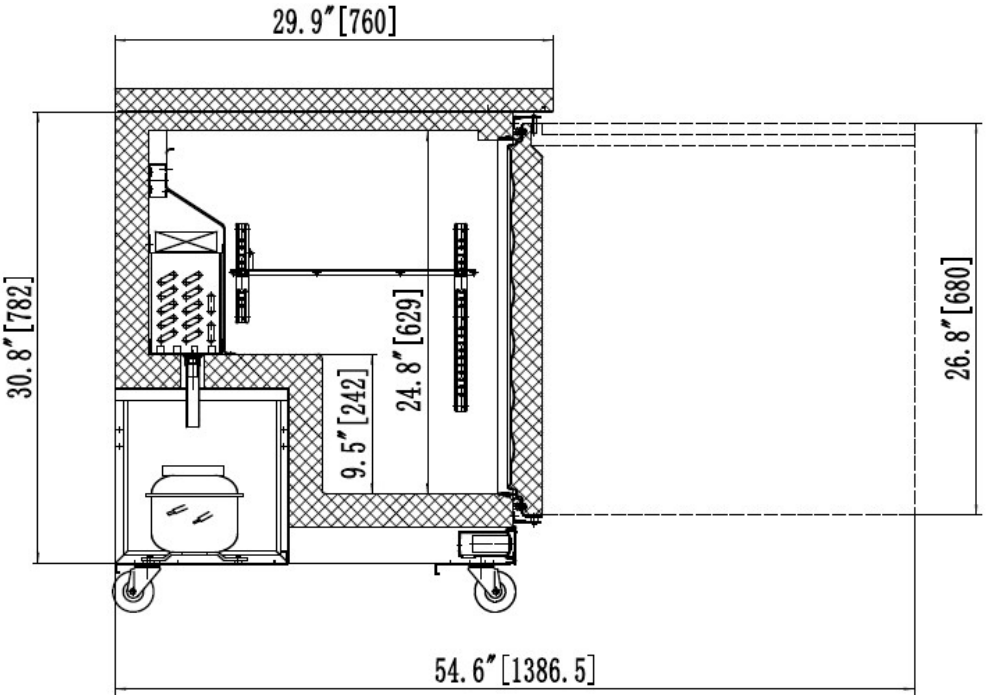

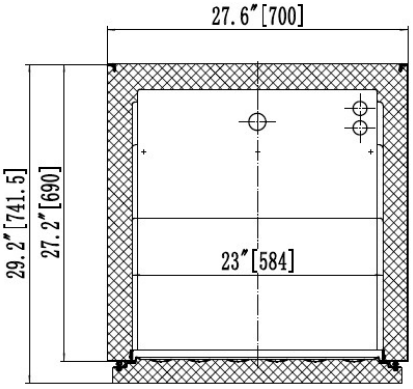

UR27-ES-HC, UR27-SI-ES-HC
UF27-HC, AND UF27-SI-HC
TOP VIEW

Model	Doors	Shelves	Refrigerant	Refrigerant Amount (o.z)	HP	BTU	Voltage	Amps	NEMA Plug
UR27-ES-HC	1	1	R600a	2.47	1/10	2800	115/60/1	1.5	5-15P
UR27-SI-ES-HC	1	1	R600a	2.47	1/10	2800	115/60/1	1.5	5-15P
UF27-HC	1	1	R290	3.35	1/4	3500	115/60/1	1.9	5-15P
UF27-SI-HC	1	1	R290	3.35	1/4	3500	115/60/1	1.9	5-15P

Model	Cord Length (Appx)	Cabinet Dim (inch)			Net Weight (Appx)	Shipping Dim (Inch)			Shipping Weight (lbs.) (Appx)
		Length	Depth	Height		Length	Depth	Height	
UR27-ES-HC	9.2'	27.8	29.9	35.7	132	29.3	31.5	38.2	165
UR27-SI-ES-HC	9.2'	27.8	29.9	35.7	132	29.3	31.5	38.2	165
UF27-HC	9.2'	27.8	29.9	35.7	141	29.3	31.5	38.2	172
UF27-SI-HC	9.2'	27.8	29.9	35.7	141	29.3	31.5	38.2	172