Refrigeration "HC"

REFRIGERATION UNDERCOUNTER

61" Undercounter Units

All 61" Undercount Refrigerators & Freezers Models	
UR61-ES-HC	61" Undercounter Refrigerator with Standard Interior Energy Star®
UR61-ES-SI-HC	61" Undercounter Refrigerator with Stainless-Steel Interior Energy Star®
UF61-HC	61" Undercounter Freezerr with Standard Interior
UF61-SI-HC	61" Undercounter Freezerr with Stainless-Steel Interior



UR61-ES-HC, UR61-SI-ES-HC
UF61-HC, UF61-SI-HC

STANDARD FEATURES

- Solid state thermostat with digital display with programmable defrost
- Stainless steel front and sides standard on all models.
- "SI" models have stainless steel interior
- Self-closing doors remain open past 90˚
- Environmentally friendly more energy efficient R600a for refrigerator, R290 for freezers
- EZ slide-out condenser, easier cleaning and serviceable
- Whisper-quiet operation
- Solid construction with "blown-in" polyurethane foam insulation (CFC-free)
- Full-length integrated stainless steel door handle
- 2½" Polyurethane Swivel casters standard, front with brakes.
- Cool air intake on left side, clearance requirement 2" both sides and rear
- 2 Year Parts & Labor Warranty, with and additional 3 years on compressor


***Not suitable for installation in a non-commercial or residential applications.**

ITEMS	DESCRIPTION	ITEMS	DESCRIPTION
Front, top & sides	Stainless-Steel	Shelves	Heavy Duty, PVC Coating
Doors (standard)	Stainless-Steel / ABS liner	Temperature control	Solid State Thermostat/Digital Display
Doors (optional "SI")	Stainless-Steel including liner	Approvals	ETL listed, Conforms to NSF/ANSI STD 7
External back	Galvanized	Refrigerating systems	Capillary Tube
Cabinet interior (standard)	Aluminum Painted	Refrigerant used	Refrigerator:R600, Freezer: R290
Cabinet interior (Optional "SI")	Stainless-Steel	Temperature range	34˚F to 38˚F / -8˚F to 0˚F
Interior floor	Stainless-Steel	Evaporator	Powder Coated Aluminum/Copper
Insulation	Polyurethane (CFC Free)	Condensing unit	Rear Mounted


Entree L.L.C.
Customer Service (704) 900-2068
Email: greatfood@entree.biz
Website: www.entree.biz


DETAILS AND DIMENSIONS

UR61-ES-HC, UR61-SI-ES-HC,
UF61-HC, UF61-SI-HC FRONT VIEW

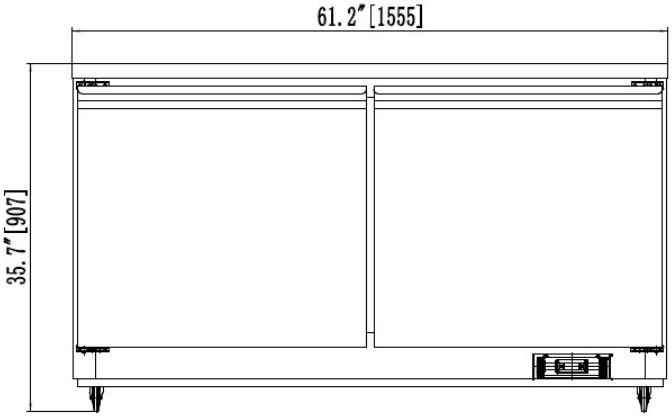

UR61-ES-HC, UR61-SI-ES-HC, UF61-HC AND UF61-SI-HC SIDE VIEW

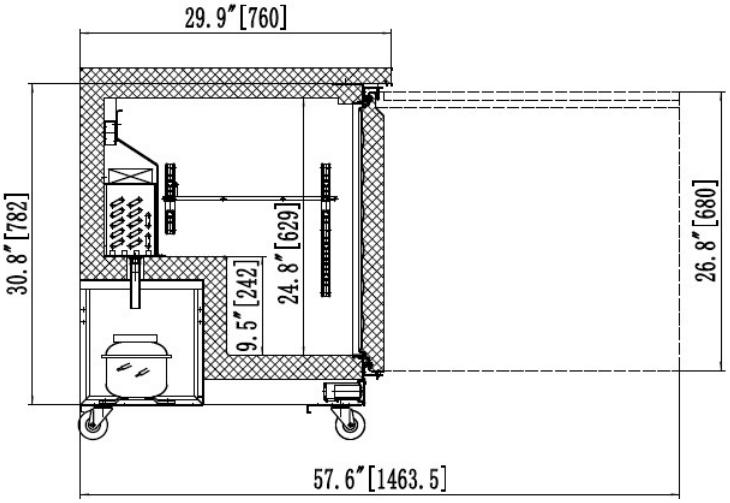

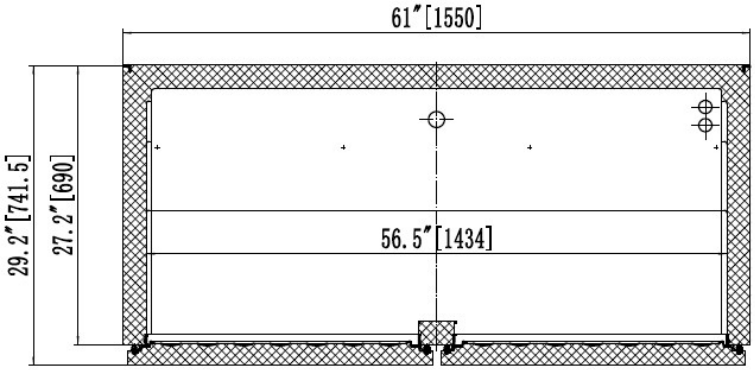

UR61-ES-HC, UR61-SI-ES-HC
UF61-HC, AND UF61-SI-HC
TOP VIEW

Model	Doors	Shelves	Refrigerant	Refrigerant Amount (o.z)	HP	BTU	Voltage	Amps	NEMA Plug
UR61-ES-HC	2	2	R600a	2.82	1/8	3200	115/60/1	3.0	5-15P
UR61-SI-ES-HC	2	2	R600a	2.82	1/8	3200	115/60/1	3.0	5-15P
UF61-HC	2	2	R290	3.53	1/2	4200	115/60/1	5.0	5-15P
UF61-SI-HC	2	2	R290	3.53	1/2	4200	115/60/1	5.0	5-15P

Model	Cord Length (Appx)	Cabinet Dim (inch)			Net Weight (Appx)	Shipping Dim (Inch)			Shipping Weight (lbs.) (Appx)
		Length	Depth	Height		Length	Depth	Height	
UR61-ES-HC	9.2'	61.2	29.9	35.7	234	62.8	31.5	38.2	291
UR61-ES-SI-HC	9.2'	61.2	29.9	35.7	234	62.8	31.5	38.2	291
UF61-HC	9.2'	61.2	29.9	35.7	266	62.8	31.5	38.2	317
UF61-SI-HC	9.2'	61.2	29.9	35.7	266	62.8	31.5	38.2	317