Series "HT"

APPROVAL PENDING

BLAST CHILLER & FREEZER



Model	Doors
EBC3-HC	1
EBC5-HC	1
EBC10-HC	1

STANDARD FEATURES

- Solid-state thermostat with digital temperature display for precise control
- 75 mm high-density thick insulation to maximize thermal efficiency.
- Ventilated refrigeration compartment for consistent cooling performance
- Self-closing doors equipped with durable, easy to clean magnetic balloon gaskets
- Replaceable electric door mullion heater to prevent condensation
- Environmentally friendly R290
- Full stainless steel AISI 304 construction (interior and exterior) with rounded internal corners for easy cleaning
- Core temperature insert probe designed to measure temperature at the center of the product
- Choics of models from 3 set to 10 set GN1/1 or 400*600 trays.

BLAST CHILLERS 158ºF to 38º

During the Blast Chilling cycle, the product temperature is rapidly reduced from 158ºF to 38ºF.The critical zone between 149ºF and 50ºF—the ideal range for bacterial growth—is passed through quickly enough to prevent bacterial proliferation. Once properly blast-chilled, the food product can be safely stored in a standard refrigerator for up to 8 days.

SHOCK FREEZERS 158ºF to 0ºF


Shock Freezing provides maximum storage life by rapidly producing cold temperatures that form micro-crystals within the food. These micro-crystals help preserve the cell structure, maintaining product quality. A Shock Freezer reduces the product temperature from 158ºF to 0ºF in 240 minutes or less. After shock freezing, the product can be stored for months in a standard freezer.


***Not for household use, warranty is voided in non-commercial or residential applications**

REFRIGERATION


DETAILS AND DIMENSIONS

MODEL EBC3-HC

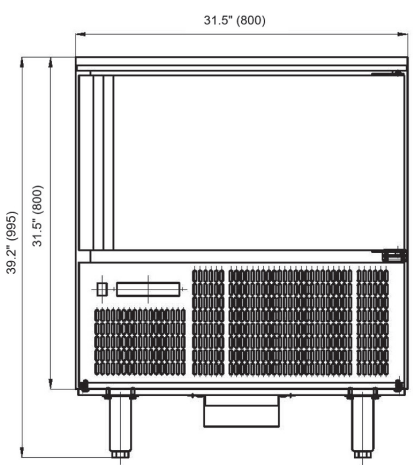


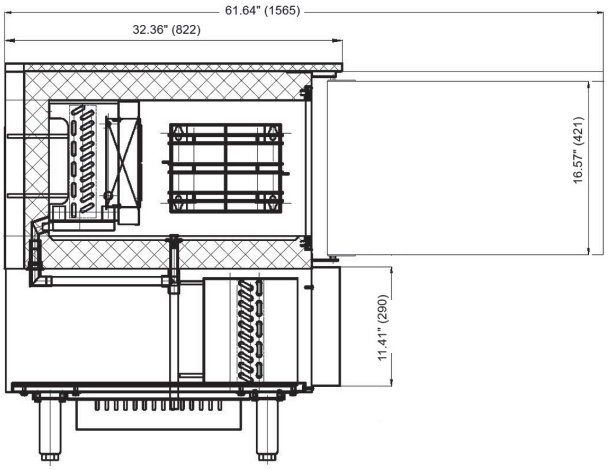


TOP VIEW ALL

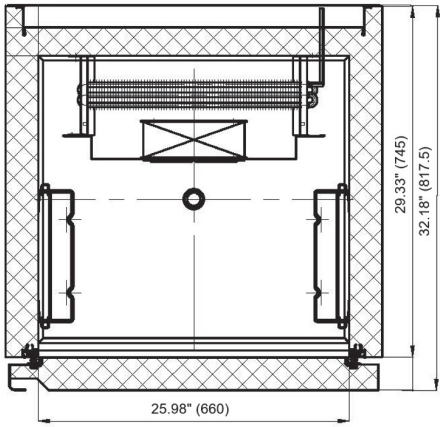



MODEL EBC5-HC

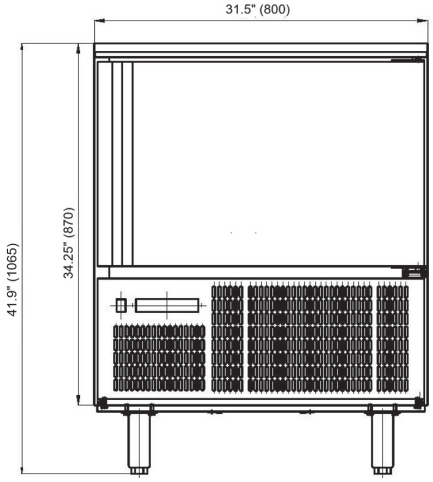

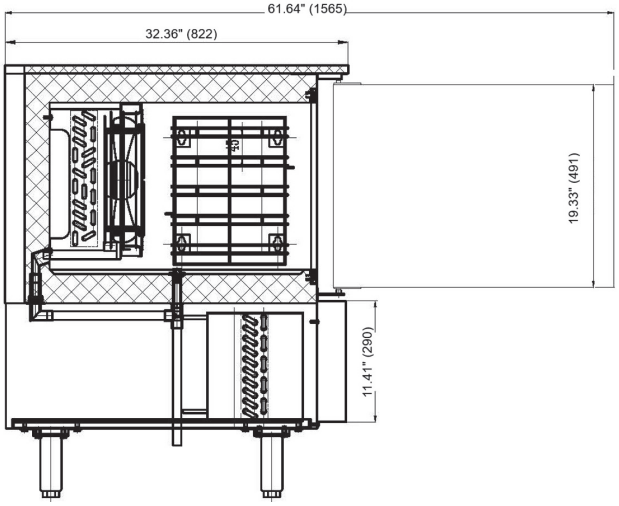

MODEL EBC10-HC

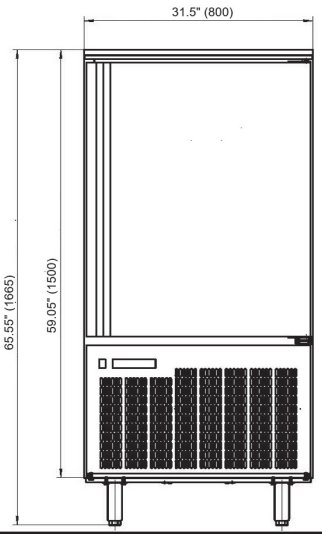

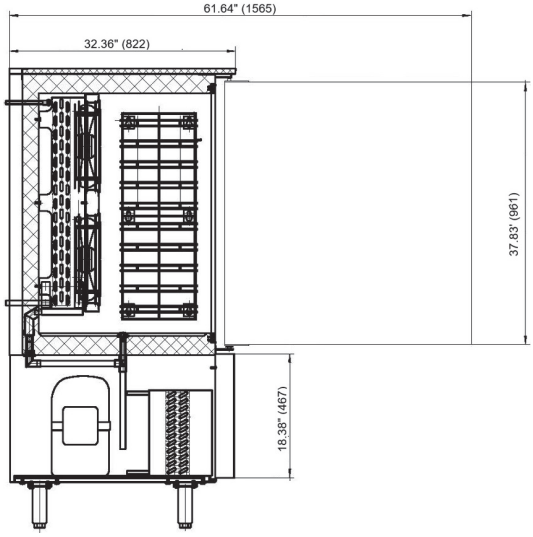

MODEL NO.	DOORS	AMP	VOLTAGE PHASE	HP	BTU	FREON	REFRIGERANT AMOUNT (o.z)	NET WEIGHT (lbs)	CABINET DIMENSION (INCH)			INSIDE DIMENSION (INCH)			SHIPPING DIMENSION			SHIPPING WEIGHT (lbs)
									W	D	H	W	D	H	W	D	H	
EBC3-HC	1	8	115V/60Hz/1	1 1/4	3650	R290	4.58	229	31.5	32.36	39.2	25.98	16.50	12.99	34.25	35.40	40.55	286
EBC5-HC	1	8	115V/60Hz/1	1 1/4	3650	R290	4.58	255	31.5	32.36	41.9	25.98	16.50	15.70	34.25	35.40	43.30	328
EBC10-HC	1	11	115-208V/60Hz/1	1 1/2	4500	R290	5.29	330	31.5	32.36	65.55	25.98	16.50	34.25	34.25	35.40	68.11	418

As continued product improvement is a policy of Entree, specifications are subject to change without notice.