Refrigeration "X"

Merchandiser Refrigerator





Model	Type
EGM33X	Swing Door
EGM33X-SL	Sliding Door

STANDARD FEATURES

- Solid state adjustable thermostat with digital display, with programmable defrost. With error codes to diagnose service issues
- Rounded corner design inside of cabinet makes it easy to clean
- Double pane glass door
- Self-closing doors remain open past 90˚
- Environmentally friendly more energy efficient R290 Freon hold 33˚F to 41˚F, ideal for beverage and soft drinks
- Whisper Quiet operating
- Solid construction with “blown-in” polyurethane foam insulation (CFC free)
- 4” Polyurethane Swivel casters standard, front with brakes.
- Shelf: Adjustable, heavy duty PVC coated shelves with marketing tags
- Bottom mount compressor, "No Stoop" lower shelf
- Easily accessible condenser coil for cleaning and easy service access
- Simple installation with no plumbing required

***Not suitable for installation in a non-commercial or residential applications.**

ITEMS	DESCRIPTION	ITEMS	DESCRIPTION
Front, top & sides	Coated Steel	Temperature control	Solid State Thermostat/Digital Display
Doors (standard)	Double Pane Glass Door	Approvals	ETL listed, Conforms to NSF/ANSI STD 7
External back	Coated Steel	Refrigerating systems	Capillary Tube
Cabinet interior (standard)	Aluminum Painted	Refrigerant used	R290
Interior floor	Stainless-Steel	Temperature range	33˚F to 41˚F
Insulation	Polyurethane (CFC Free)	Evaporator	Powder Coated Aluminum/Copper
Shelves	Heavy Duty, PVC Coating	Condensing unit	Bottom Mounted


MERCHANDISER

Entree L.L.C.
Customer Service (704) 900-2068
Email: greatfood@entree.biz
Website: www.entree.biz


Intertek Intertek


DETAILS AND DIMENSIONS


S29-HC, S29-SI-HC, S29-MT-HC,
S29-MT-SI-HC FRONT VIEW

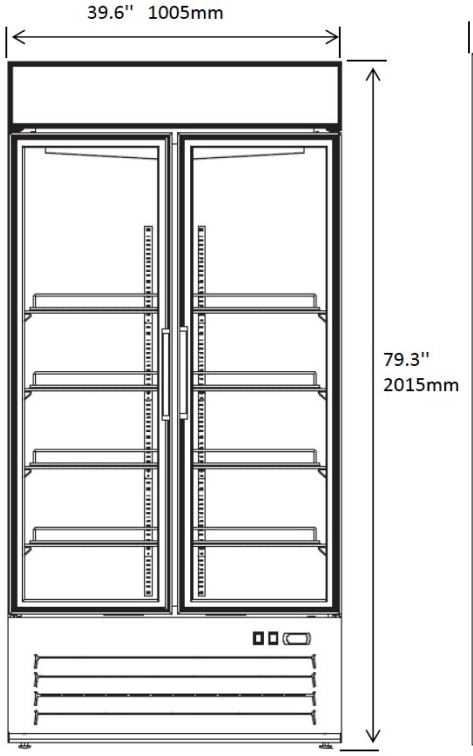



S29-HC & S29-SI-HC SIDE VIEW

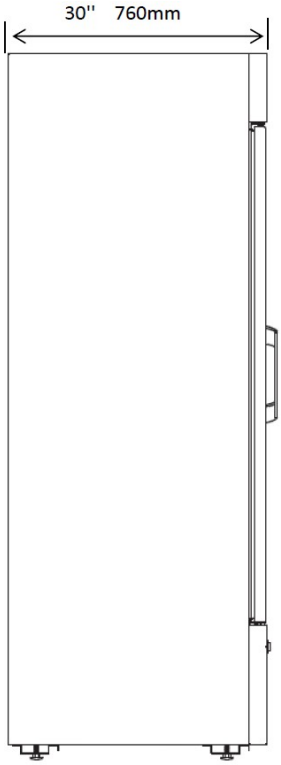

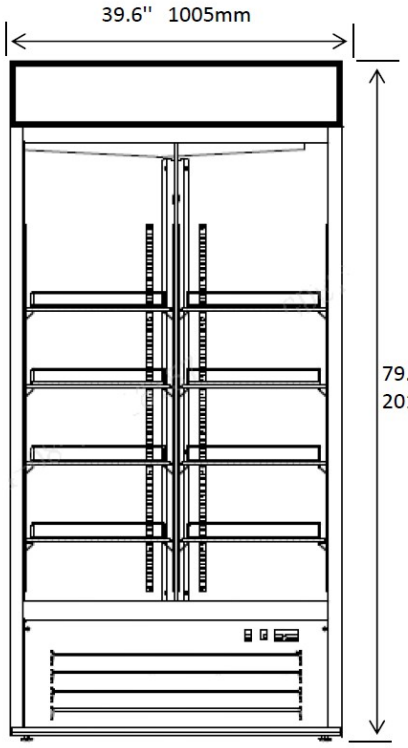

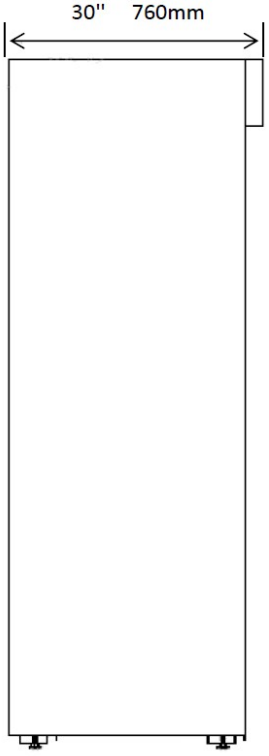

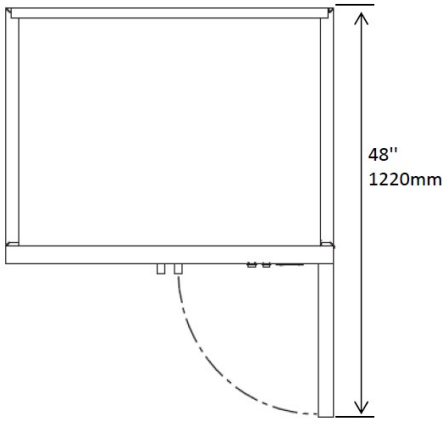

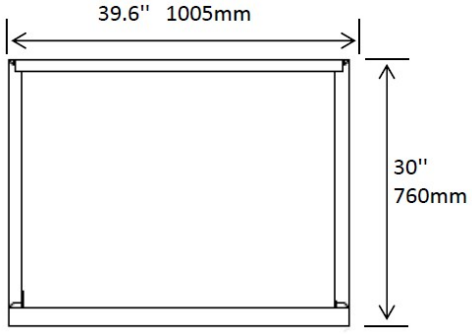

Model	Doors	Shelves	Pans	HP	Voltage	Amps	NEMA Plug	Cord Length (Appx)	Cabinet Dim (inch)			Net Weight (Appx)	Shipping Dim (Inch)			Shipping Weight (lbs.) (Appx)
									Length	Depth	Height		Length	Depth	Height	
S29-HC	1	1	8 (1/6)	⅛	115/60/1	3.0	5-15P	9.2'	28.9	29.9	43.2	157	30.5"	31.5"	47.2"	223
S29-SI-HC	1	1	8 (1/6)	⅛	115/60/1	3.0	5-15P	9.2'	28.9	29.9	43.2	157	30.5"	31.5"	47.2"	223
S29-MT-HC	1	1	12 (1/6)	⅛	115/60/1	3.0	5-15P	9.2'	28.9	31.9	43.2	216	30.5"	34.3"	47.2"	229
S29-MT-SI-HC	1	1	12 (1/6)	⅛	115/60/1	3.0	5-15P	9.2'	28.9	31.9	43.2	216	30.5"	34.3"	47.2"	229