



Refrigeration "HC"



61" Sandwich and Salad Units



S61-HC, S61-SI-HC



S61-MT-HC, S61-MT-SI-HC

Model	Size
S61-HC	61" Unit
S61-SI-HC	61" Unit
S61-MT-HC	61" Unit
S61-MT-SI-HC	61" Unit

STANDARD FEATURES

- Solid state thermostat with digital display with programmable defrost
- 1/6 size Polycarbonate pans included. (For best air flow and maintaining product temperature.)
- Full-length Polyethylene cutting board included (Easily reversible using both sides)
- Stainless steel front and sides standard on all models.
- "SI" models have stainless steel interior
- Self-closing doors remain open past 90°
- Environmentally friendly more energy efficient R290 refrigerant
- EZ slide-out condenser, easier cleaning and serviceable
- Whisper-quiet operation
- Solid construction with "blown-in" polyurethane foam insulation (CFC-free)
- Full-length integrated stainless steel door handle
- 2½" Polyurethane Swivel casters standard, front with brakes.
- Cool air intake on left side, clearance requirement 2" both sides and rear

*Not suitable for installation in a non-commercial or residential applications.


ITEMS	DESCRIPTION	ITEMS	DESCRIPTION
Front, top & sides	Stainless-Steel	Shelves	Heavy Duty, PVC Coating
Doors (standard)	Stainless-Steel / ABS liner	Cutting board	Polyethylene (included)
Doors (optional "SI")	Stainless-Steel including liner	Temperature control	Solid State Thermostat/Digital Display
External back	Galvanized	Approvals	ETL listed, Conforms to NSF/ANSI STD 7
Cabinet interior (standard)	Aluminum Painted	Refrigerating systems	Capillary Tube
Cabinet interior (Optional "SI")	Stainless-Steel	Refrigerant used	R290
Interior floor	Stainless-Steel	Temperature range	34°F to 38°F
Insulation	Polyurethane (CFC Free)	Evaporator	Powder Coated Aluminum/Copper
		Condensing unit	Rear Mounted

REFRIGERATION PREP




DETAILS AND DIMENSIONS


S61-HC, S61-SI-HC, S61-MT-HC, & S61-MT-SI-HC

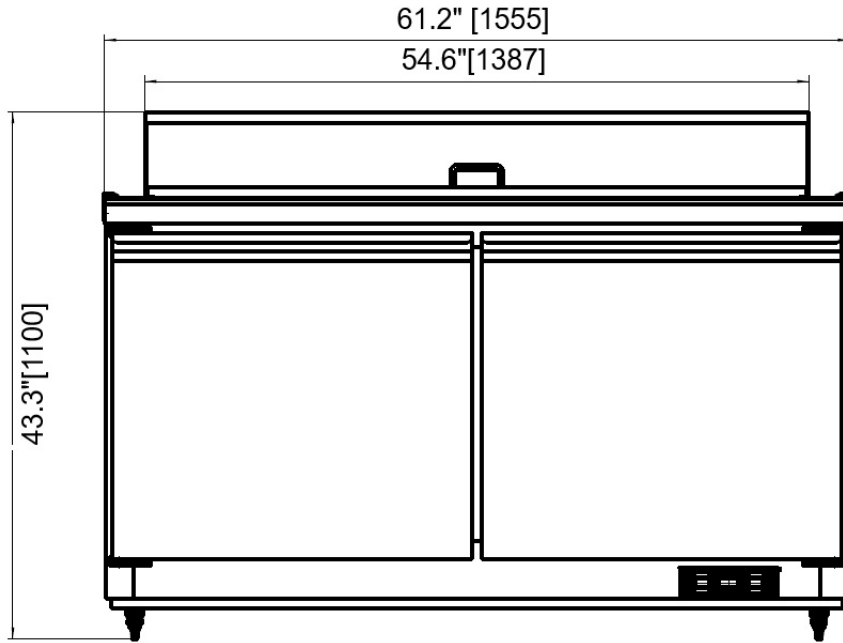


S61-HC & S61-SI-HC PAN VIEW

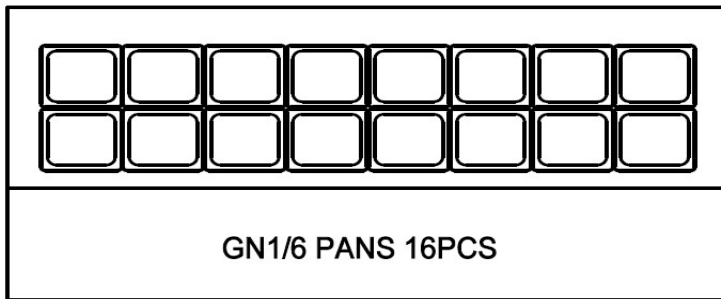


S61-MT-HC & S61-MT-SI-HC PAN VIEW

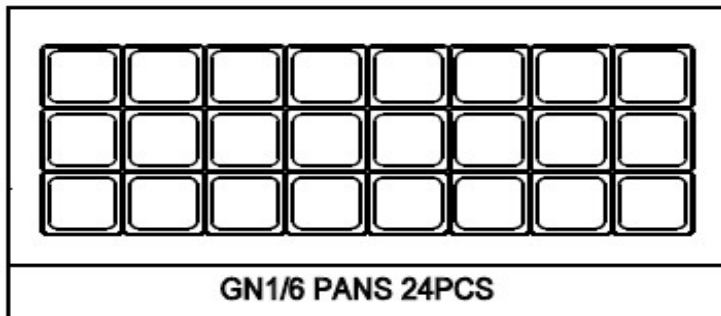

S61-HC & S61-SI-HC
SIDE VIEW

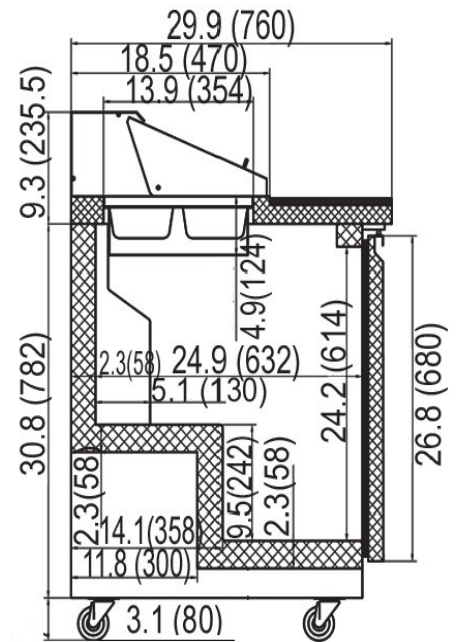

S61-MT-HC & S61-MT-SI-HC SIDE VIEW

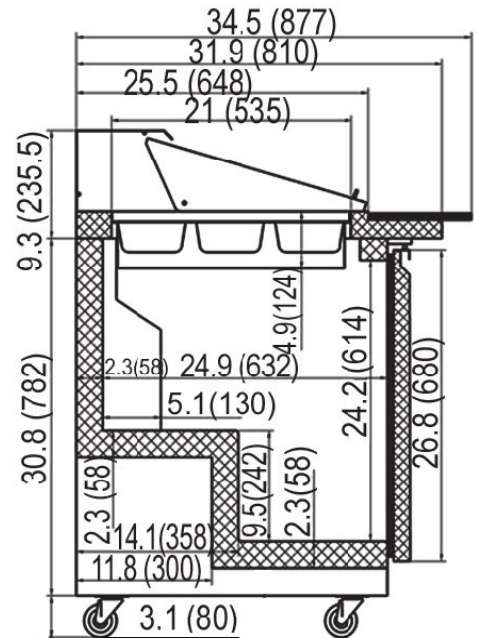

Model	Doors	Shelves	Pans	HP	Voltage	Amps	NEMA Plug	Cord Length (Appx)	Cabinet Dim (inch)			Net Weight (Appx)	Shipping Dim (Inch)			Shipping Weight (lbs.) (Appx)
									Length	Depth	Height		Length	Depth	Height	
S61-HC	2	2	16 (1/6)	1/3	115/60/1	4.3	5-15P	9.2'	61.2	29.9	43.2	260	62.8	31.5	47.2	392
S61-SI-HC	2	2	16 (1/6)	1/3	115/60/1	4.3	5-15P	9.2'	61.2	29.9	43.2	260	62.8	31.5	47.2	392
S61-MT-HC	2	2	24 (1/6)	1/3	115/60/1	4.3	5-15P	9.2'	61.2	31.9	43.2	276	62.8	34.3	47.2	408
S61-MT-SI-HC	2	2	24 (1/6)	1/3	115/60/1	4.3	5-15P	9.2'	61.2	31.9	43.2	276	62.8	34.3	47.2	408