Refrigeration "HC"

72" Worktop Units

All 72" Worktop Refrigerators and Freezer Models	
WTR72-HC	72" Worktop Refrigerator with Standard Interior
WTR72-SI-HC	72" Worktop Refrigerator with Stainless-Steel Interior
WTF72-HC	72" Worktop Freezerr with Standard Interior
WTF72-HC	72" Worktop Freezerr with Stainless-Steel Interior

REFRIGERATION WORKTOP



WTR72-HC, WTR72-SI-HC
WTF72-HC, WTF72-SI-HC

STANDARD FEATURES

- Solid state thermostat with digital display with programmable defrost
- Stainless steel front and sides standard on all models.
- “SI” models have stainless steel interior
- Self-closing doors remain open past 90˚
- Environmentally friendly more energy efficient R290
- EZ slide-out condenser, easier cleaning and serviceable
- Whisper-quiet operation
- Solid construction with “blown-in” polyurethane foam insulation (CFC-free)
- Full-length integrated stainless steel door handle
- 2½” Polyurethane Swivel casters standard, front with brakes.
- Cool air intake on left side, clearance requirement 2” both sides and rear
- 2 Year Parts & Labor Warranty, with and additional 3 years on compressor

***Not suitable for installation in a non-commercial or residential applications.**


ITEMS	DESCRIPTION	ITEMS	DESCRIPTION
Front, top & sides	Stainless-Steel	Shelves	Heavy Duty, PVC Coating
Doors (standard)	Stainless-Steel / ABS liner	Temperature control	Solid State Thermostat/Digital Display
Doors (optional "SI")	Stainless-Steel including liner	Approvals	ETL listed, Conforms to NSF/ANSI STD 7
External back	Galvanized	Refrigerating systems	Capillary Tube
Cabinet interior (standard)	Aluminum Painted	Refrigerant used	R290
Cabinet interior (Optional "SI")	Stainless-Steel	Temperature range	34˚F to 38˚F / -8˚F to 0˚F
Interior floor	Stainless-Steel	Evaporator	Powder Coated Aluminum/Copper
Insulation	Polyurethane (CFC Free)	Condensing unit	Rear Mounted

Entree L.L.C.
Customer Service (704) 900-2068
Email: greatfood@entree.biz
Website: www.entree.biz


Intertek Intertek


DETAILS AND DIMENSIONS

WTR72-HC, WTR72-SI-HC,
WTF72-HC, WTF72-SI-HC FRONT VIEW

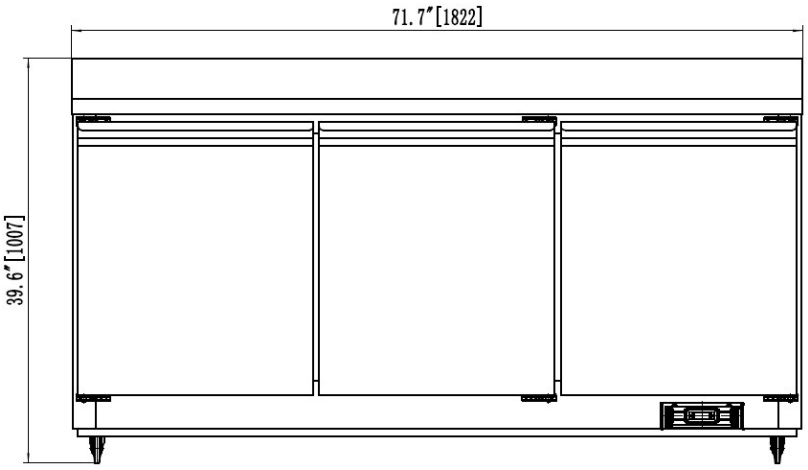

WTR72-HC, WTR72-SI-HC, WTF72-HC AND WTF72-SI-HC SIDE VIEW

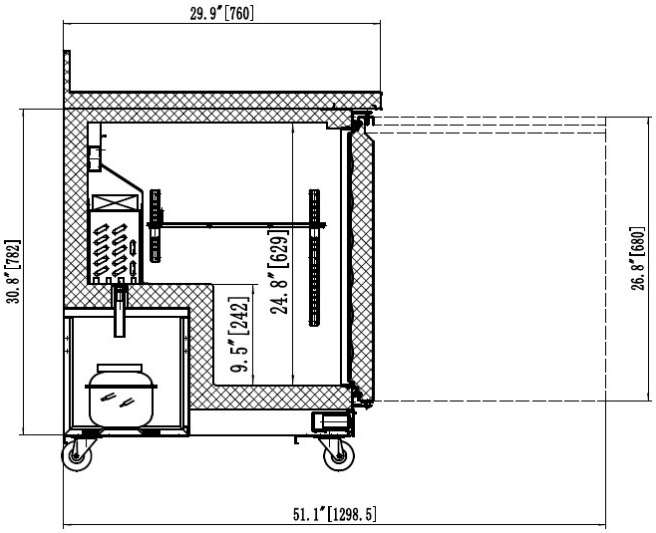

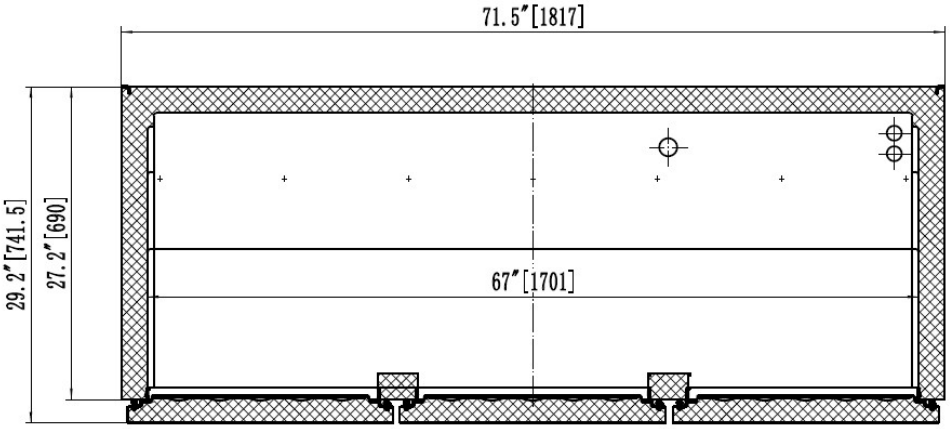

WTR72-HC, WTR72-SI-HC,
WTF72-HC, AND WTF72-SI-HC
TOP VIEW

Model	Doors	Shelves	Refrigerant	Refrigerant Amount (o.z)	HP	BTU	Voltage	Amps	NEMA Plug
WTR72-HC	3	3	R290	4.59	1/5	3400	115/60/1	3.5	5-15P
WTR72-SI-HC	3	3	R290	4.59	1/5	3400	115/60/1	3.5	5-15P
WTF72-HC	3	3	R290	3.88	3/4	6200	115/60/1	6.0	5-15P
WTF72-SI-HC	3	3	R290	3.88	3/4	6200	115/60/1	6.0	5-15P

Model	Cord Length (Appx)	Cabinet Dim (inch)			Net Weight (Appx)	Shipping Dim (Inch)			Shipping Weight (lbs.) (Appx)
		Length	Depth	Height		Length	Depth	Height	
WTR72-HC	9.2'	71.7	29.9	39.6	289	73.3	31.5	42.5	357
WTR72-SI-HC	9.2'	71.7	29.9	39.6	289	73.3	31.5	42.5	357
WTF72-HC	9.2'	71.7	29.9	39.6	334	73.3	31.5	42.5	385
WTF72-SI-HC	9.2'	71.7	29.9	39.6	334	73.3	31.5	42.5	385

As continued product improvement is a policy of Entree, specifications are subject to change without notice.