



HIGH SPEED OVEN




HSS-208
Model Shown

SPECIFICATIONS:

Solaris Model HSB-208, HSB-240, HSS-208, & HSS-240 is a single compartment high speed oven. The Solaris oven is designed to provide customers with fast, energy-efficient, easy-to-operate cooking solutions that allow them to handle peak meal times with ease.

Solaris combines microwave, hot air impingement and smart cooking technologies to deliver fast cooking without compromising on food quality, while saving energy and reducing space requirement.

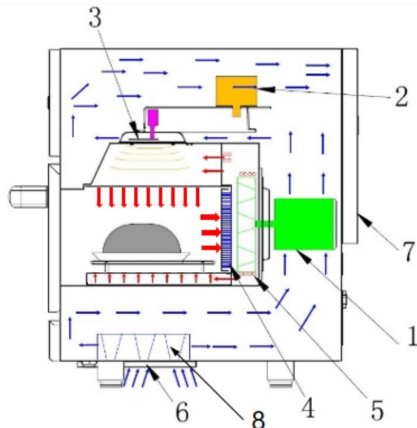

- | | |
|---------------------|---------------------------------|
| 1. Blower | 7. Exhaust port with grease pan |
| 2. Magnetron | 8. Cooling fan |
| 3. Stirrer | |
| 4. Catalytic filter | |
| 5. Heating element | |
| 6. Air filter | |

Exterior Construction:

- Choice of matte black painted housing or stainless steel housing
- Die-cast front panel with choice of matte black paint or chrome plating
- Heat sink system to keep the housing below 55!C
- Ergonomic chrome door handle
- 4-inch adjustable feet (optional 2-inch)

Standard Features:

- Microwave system on top
- Single magnetron with stirrer for uniform microwave distribution
- Built-in catalytic filter, removable and replaceable
- External air filter
- Exhaust port with grease pan
- Heavy duty door hinges
- 5-inch touch screen
- Intelligent cooking system with 1024 recipes memory
- Software or recipe updates via USB
- Access to single-phase electricity
- Oven self-diagnostic function
- Power cord and plug (optional)

Standard accessories

- 1 pizza pan
- 1 teflon basket
- 1 round teflon mesh pad
- 1 shovel
- Inner hall grill

Certifications:



Optional Functions:

- ✓ Scan code and cook
- ✓ WIFI Connection

Entree L.L.C.
Customer Service (704) 900-2068
For Sales Info email: greatfood@entree.biz
Website: www.entree.biz


This appliance is for commercial indoor use only.
**Not for household use, warranty is voided in non-commercial or residential applications.

HIGH SPEED COOKING



DETAILS AND DIMENSIONS

Technical Drawing for both HSB & HSS Models

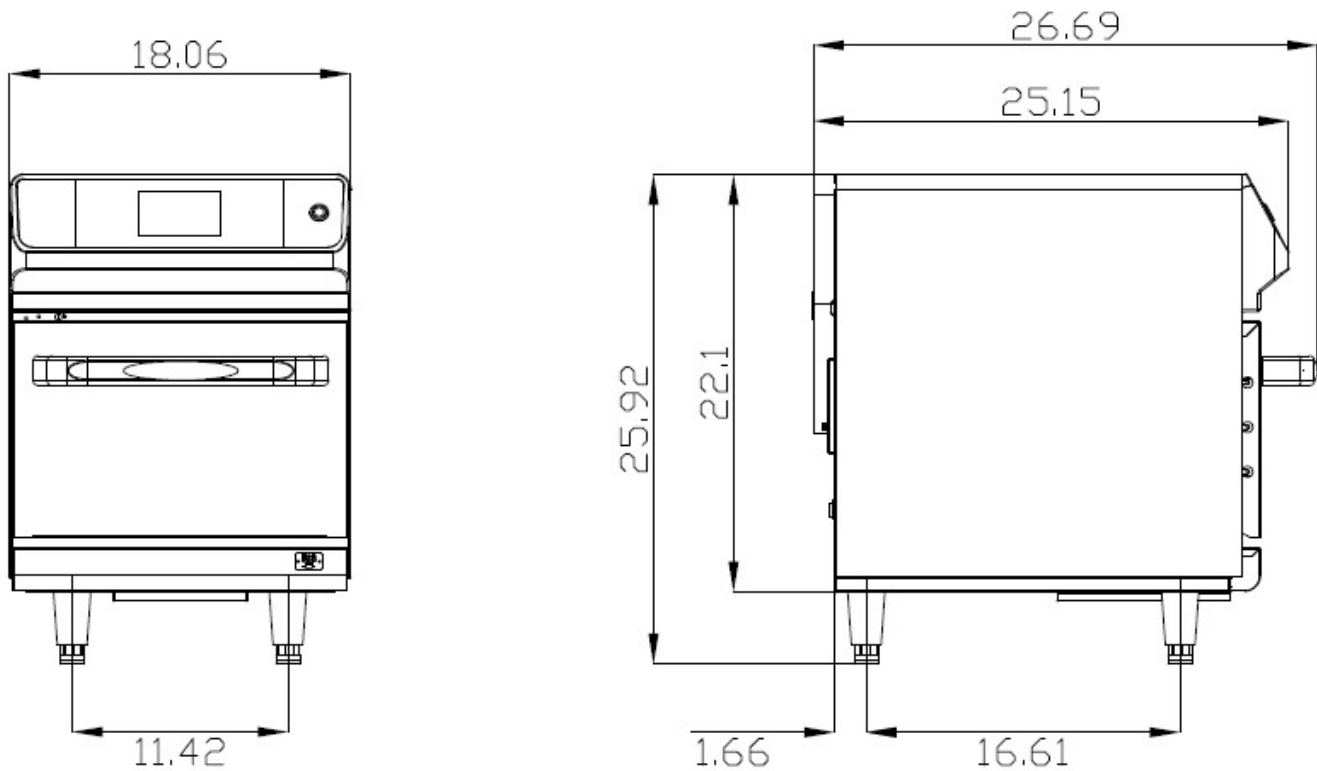

**Model:
HSB**



**Model:
HSS**



MODEL	5" Touch Screen		CAPACITY US Liquid Gal.	Voltage/kW		Amperage		Power (kW)		Max Temp (°F)
	Menu Storage	Cooking Stage		208VAC	240VAC	208VAC	240VAC	*Microwave	Hot Air	
HSB-208	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSS-208	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSB-240	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F
HSS-240	1024	15	4.5	3.25	3.85	15.63	14.96	1.7	3	536°F

MODEL	DIMENSION (Inches)			INSIDE DIMENSIONS			Net Weight
	Width	Depth	Height	Width	Depth	Height	Lbs.
HSB-208	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSS-208	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSB-240	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5
HSS-240	18.06"	26.69"	25.92"	12.0"	12.0"	7.28"	145.5